

UNCLASSIFIED

AD NUMBER
AD910305
NEW LIMITATION CHANGE
TO Approved for public release, distribution unlimited
FROM Distribution authorized to U.S. Gov't. agencies only; Test and Evaluation; 30 Apr 1973. Other requests shall be referred to U.S. Army Electronics Command, Fort Monmouth, NJ 07703.
AUTHORITY
USAECOM ltr, 16 Aug 1977

THIS PAGE IS UNCLASSIFIED

AD

AD 910305



# Research and Development Technical Report ECOM-4106


## UHF PROPAGATION PATH LOSS MEASUREMENTS AT LOW GRAZING ANGLES

Henry Schlusser

April 1973

### DISTRIBUTION STATEMENT

Distribution limited to U. S. Government agencies only.  
Test and Evaluation, 30 Apr 73. Other requests  
for this document must be referred to Commanding  
General, U. S. Army Electronics Command,  
ATTN: AMSL-VL-G, Fort Monmouth, N.J. 07703

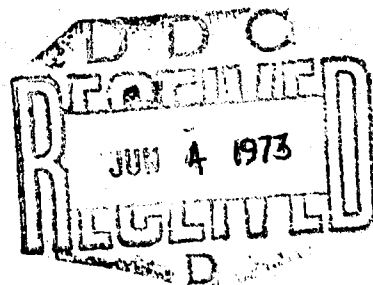

# ECOM

UNITED STATES ARMY ELECTRONICS COMMAND • FORT MONMOUTH, N.J.

## NOTICES

### Disclaimers

The findings in this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.

The citation of trade names and names of manufacturers in this report is not to be construed as official Government indorsement or approval of commercial products or services referenced herein.

### Disposition

Destroy this report when it is no longer needed. Do not return it to the originator.

Reports Control Symbol OSD-1366

TECHNICAL REPORT ECOM-4106

UHF PROPAGATION PATH LOSS MEASUREMENTS AT LOW GRAZING ANGLES

by

Henry Schlusser

AIR TRAFFIC MANAGEMENT SYSTEMS TECHNICAL AREA  
AVIONICS LABORATORY

AMC Code No. 591 700.A1.072.26.01.R910Z-2

April 1973

Distribution limited to U. S. Government agencies only:  
Test and Evaluation; 30 Apr 73. Other requests  
for this document must be referred to Commanding  
General, U. S. Army Electronics Command,  
ATTN: AMSEL-VL-6, Fort Monmouth, N. J. 07703

U. S. ARMY ELECTRONICS COMMAND, FORT MONMOUTH, NEW JERSEY



### ABSTRACT

This report covers RF path loss measurements near Fort Monmouth, N.J., over distances of up to 10 miles and at low grazing angles. Four frequencies were used during these tests, three in the UHF region and one just below it. Measurements were made with antennas vertically, horizontally, and circularly polarized. Paths were varied from non-line-of-sight to definitely line-of-sight. Comparison of losses under varying conditions were made and graphs for estimating losses in the area covered by these tests are included.

## TABLE OF CONTENTS

	<u>Page</u>
1. BACKGROUND	1
2. INTRODUCTION AND OBJECTIVE	1
3. TEST PROCEDURE	2
4. RECEIVING EQUIPMENT	10
5. TRANSMITTING EQUIPMENT	10
6. TRANSMITTING SITES	10
a. AEL, Monmouth Country Airport Site 5	14
b. Wayside Site 9	16
c. Wayside Site 9A	18
d. Wayside Site 10	20
e. Wayside Site 14	22
f. Wayside Site 19	24
g. Wayside Site 19B	26
h. Evans Area "F" Site 20	27
7. SAMPLE DATA	29
8. TEST RESULTS	35
a. 229.5 MHz Comparison Plots (Figures 29 through 32)	39
b. 371.4 MHz Comparison Plots (Figures 33 through 41)	43
c. 1,545 MHz Comparison Plots (Figures 42 through 51)	52
9. COMMENTS ON THE TEST RESULTS	62
APPENDIX. REDUCED DATA	66

## TABLES

	<u>Page</u>
I. Antenna and Cable Data	3
II. Meteorological Data	4
III. Test Schedule	5
IV. Test Data Sheet	6
V. Path Loss - 1972 Low Points	36

## FIGURES

1. Map of the Test Area	7
2. Sample Received Signal Recording	8
3. Sample Propagation Path Loss Graph	9
4. Receiver Recording Equipment	11
5. Transmitter Van	12
6. Transmitter Recording Equipment	13
7. AEL, Monmouth County Airport Site 5	14
8. Site 5 Profile Chart	15
9. Wayside Site 9	16
10. Site 9 Profile Chart	17
11. Wayside Site 9A	18
12. Site 9A Profile Chart	19
13. Wayside Site 10	20
14. Site 10 Profile Chart	21
15. Wayside Site 14	22
16. Site 14 Profile Chart	23
17. Wayside Site 19	24
18. Site 19 Profile Chart	25
19. Wayside Site 19B	26
20. Evans Area "P" Site 20	27
21. Site 20 Profile Chart	28
22. Typical Test Sheet	30
23. Propagation Path Loss Strip Chart	31
24. Propagation Path Loss Strip Chart	32
25. Typical Test Data Sheet	33
26. Propagation Path Loss Graph	34
27. Propagation Path Loss 1,545 MHz	37
28. Propagation Path Loss 371.4 MHz	38
29. Propagation Path Loss (Site 9 to Hexagon, Frequency 229.5 MHz, Antenna AT-197)	39
30. Propagation Path Loss (Site 19B to Hexagon, Frequency 229.5 MHz, Antenna T-29 (Horizontal))	40
31. Propagation Path Loss (Site 19B to Hexagon, Frequency 229.5 MHz, Antenna T-29 (Vertical))	41
32. Propagation Path Loss (Site 19B to Hexagon, Frequency 229.5 MHz, Antenna) (See Graph, Figure 3)	42
33. Propagation Path Loss (Site 5 to Hexagon, Frequency 371.4 MHz, Antenna AT-197)	43

	<u>Page</u>
34. Propagation Path Loss (Site 9 to Hexagon, Frequency 371.4 MHz, Antenna AT-197)	44
35. Propagation Path Loss (Site 19 to Hexagon, Frequency 371.4 MHz, Antenna AT-197)	45
36. Propagation Path Loss (Site 19B to Hexagon, Frequency 371.4 MHz, Antenna T-29 (Horizontal))	46
37. Propagation Path Loss (Site 19B to Hexagon, Frequency 371.4 MHz, Antenna T-29 (Vertical))	47
38. Propagation Path Loss (Site 19B to Hexagon, Frequency 371.4 MHz, Antenna EMCO 3101 (Circular))	48
39. Propagation Path Loss (Site 19B to Hexagon, Frequency 371.4 MHz, Antenna (See Graph))	49
40. Propagation Path Loss (Site 19B to Hexagon, Frequency 371.4 MHz, Antenna AT-197)	50
41. Propagation Path Loss (Site 21 to Hexagon, Frequency N/A, Antenna AT-197) 1 February 1972	51
42. Propagation Path Loss (Site 5 to Hexagon, Frequency 1,545 MHz, Antenna - AEL Horn)	52
43. Propagation Path Loss (Site 9 to Hexagon, Frequency 1,545 MHz, Antenna - AEL Horn)	53
44. Propagation Path Loss (Site 9 to Hexagon, Frequency 1,545 MHz, Antenna - Andrews Discone)	54
45. Propagation Path Loss (Site 19 to Hexagon, Frequency 1,545 MHz, Antenna - Andrews Discone)	55
46. Propagation Path Loss (Site 19 to Hexagon, Frequency 1,545 MHz, Antenna - AEL Horn)	56
47. Propagation Path Loss (Site 21 to Hexagon, Frequency 1,545 MHz, Antenna (See Graph))	57
48. Propagation Path Loss (Site 19B to Hexagon, Frequency 1,545 MHz, Antenna - AEL Horn (Horizontal))	58
49. Propagation Path Loss (Site 19B to Hexagon, Frequency 1,545 MHz, Antenna - AEL Horn (Vertical))	59
50. Propagation Path Loss (Site 19B to Hexagon, Frequency 1,545 MHz, Antenna - EMCO 3102 (Circular))	60
51. Propagation Path Loss (Site 19B to Hexagon, Frequency 1,545 MHz, Antenna (See Graph))	61
52. Propagation Path Loss - 1,545 MHz	63
53. Propagation Path Loss - 371.4 MHz	64
54. Propagation Path Loss - 229.5 MHz	65

## 1. BACKGROUND

The Avionics Laboratory of the U. S. Army Electronics Command is investigating the feasibility and the technology necessary for applying time ordered techniques to multifunction avionics and ground equipment for tactical use. As presently envisioned, the RF frequencies in such a system will be in the high end of the VHF band or in the UHF band. Much of the transmission in such a system would be at very low grazing angles where the transmission path can vary from line-of-sight to non-line-of-sight. If line-of-sight does not exist, the RF signal is subjected to many factors which degrade it. Even if line-of-sight exists, multipath can cause signal distortion and variation. In order to obtain meaningful data concerning the propagation losses which will be encountered in such a system, a series of experiments were conducted to determine the extent of the signal losses when transmitting in an environment typical of the anticipated multifunction system, namely low grazing angles and natural and man-made obstructions.

## 2. INTRODUCTION AND OBJECTIVE

This report describes a series of propagation path loss tests to measure path losses at low grazing angles in the 225 to 2,300 MHz range. Path loss is the signal attenuation expressed as the ratio of the received power to the transmitted power. It can be expressed as a number, but is usually expressed as transmission loss in dB. The path loss is dependent on such factors as --

- a. the distance between the transmitter and receiver;
- b. the carrier frequency;
- c. the signal absorption factors due to the environment;
- d. the multipathing contributions which can either reinforce or reduce the received signal;
- e. diffraction losses in paths which are marginally line of sight, and;
- f. depolarization.

To be useable, the amplitude of the received signal must be large enough to provide an adequate margin over competing signal interference and noise. In general, the transmitted power required varies with the square of the distance between the transmitter and the receiver and also as the square of the ratio of the carrier frequencies.

The tests described in this report were conducted specifically to obtain input data for the Micro Navigation and Position Locating System (MNPLS). Since MNPLS has to be effective in any azimuth, the allowable means for increasing both the transmitting and receiving antenna gains are restricted to those procedures which entail vertical stacking. Such vertically stacked arrays concentrate the RF energy into a narrower vertical angle, thereby increasing the gain in the horizontal direction and decreasing the vertical coverage. The effects of the propagation path, however, can only be known in general, but not in detail, since the effects of the terrain, buildings, and

foliage that account for multipathing, signal absorption and scattering, diffraction, and depolarization cannot be determined exactly or easily separated. Even though these effects usually cannot be isolated from each other, an accumulated record of path losses can provide a practical range of path losses for which an operable system has to compensate. The tests described in this report were conducted to measure these effects in order to establish some guidelines for future systems design.

### 3. TEST PROCEDURE

All tests covered by this report were conducted between the Hexagon Building at Fort Monmouth and remote sites. The receiving antenna was always located on the roof of the Hexagon. The transmitter was located at various remote sites within a radius of less than 10 miles from the receiving site. All equipment, antennas, and cables were carefully calibrated for gain or attenuation so that the path loss could be accurately calculated from the transmitted and received power. At the transmitter site, the frequency and power output were continuously monitored and recorded. At the receiving site, received signal strength and transmitting antenna height were recorded on a strip chart recorder. Meteorological data and other pertinent data were recorded. Sample antenna and cable data, meteorological data, and a test schedule are shown in Tables I, II, and III. Figure 1 is a map of the area showing the receiving site and the various transmitting sites.

Three types of antenna supports were used at the transmitting sites. At site 19B, there was a permanent 85-foot high tower with a track on its side on which an antenna could be run up and down. At Monmouth Country Airport, site 5, a semipermanently installed crank-up tower was used, the maximum height of which was 88 feet. The third support was a portable crank-up mast with a maximum height of 33 feet. This crank-up mast could be set up at any of the sites.

The transmitter and all other equipments required at the transmitter site were contained in a truck-mounted shelter. The truck was driven to the various transmitting sites and the RF transmitter was connected either to the permanently emplaced antenna system at a particular site or to a portable one. Tests were conducted with various types of antennas and various polarizations.

A typical test run consisted of elevating the antenna from the lowest height obtainable with the mast being used, up to the highest possible height and then lowering it again. In some of the tests, the maximum height had to be limited due to high winds. During this elevation cycle the transmitter was kept at constant power and the received signal strength was recorded as a function of transmitting antenna height. Sample recording taken at the receiver is shown in Figure 2. Table IV shows a typical data reduction table. The values of received signal strength are read off the strip chart and tabulated with accompanying transmitting antenna heights. These values are then algebraically combined with transmitted power, antenna gains, and cable losses to arrive at the path loss (para 7). Most test runs were repeated two or three times, and the final tabulated path loss value was, at each height, an average of the individual path loss values. This average value was then plotted, as shown on the sample plot in Figure 3.

Table I. Antenna and Cable Data

FREQUENCY: 229.5 MHz

ANTENNA		CABLE		
TYPE	GAIN dB	TYPE	LENGTH FT.	LOSS dB
AT-197	1.2	FHJ4-50	100	1.4
			130	1.8
T-29	8.0	RG-319A/U	100	0.32
			130	0.42
EMCO 3101	- 3.8	RG-58C/U	100	9.0
			100	2.0
		FSJ4	150	3.0

FREQUENCY: 371.4 MHz

AT-197	2.0	FHJ4-50	100	1.8
			130	2.3
T-29	8.0	RG-319A/U	100	0.4
			130	0.52
EMCO 3101	6.1	RG-58C/U	100	13.0
			100	2.6
		FSJ4	150	3.9

FREQUENCY: 1545 MHz

AEL Horn	14.4	FHJ4-50	100	4.4
			130	5.7
Andrew Disccone	2.5	RG-319A/U	100	0.9
			130	1.2
Andrew Biconical	0.3	RG-58C/U	100	29.0
			100	6.5
EMCO 3102	- 0.4	FSJ4	150	9.75

FREQUENCY: 2290 MHz

AEL Horn	16.6	FHJ4-50	100	5.2
			130	6.8
Andrew Disccone	1.3	RG-319A/U	100	1.3
			130	1.6
Andrew Biconical	0.7	RG-58C/U	100	36.0
			100	8.5
		FSJ4	150	12.75

FHJ4-50  
RG-319A/U } Mollax

FSJ4 Superflex

Table II. Meteorological Data

RUN	DATE	TIME	ATMOS. PRESS. (IN.)	TEMP. (°C)	DEW PT. (°C)	REL HUMID. (%)	WIND		REMARKS
							DIR. (DEC)	SP. & GUST (KTS)	
72/01/24.03	1/24/72	0914	30.02	+ 9	+ 1	-	000	5 G10	MCA Site #5
		0959	30.06	+ 8	+ 1	72	330	2-4G7	
		1043	30.09	+11	+ 1	66	270	2-6G10	
		1248	30.06	+12	+ 1	57	000	1-4	
		1455	30.09	+12	- 2	56	300	0-0	
		1612	30.09	+ 9	- 1	60	050	1-7	
72/01/25.01	1/25/72	0837	29.75	12	10	94	270	5 G20	MCA Site #5 0857 Light Rain Falling At This Time
		1045	29.82	10	0	54	000	10 G25	
		1207	29.82	11	- 2	51	270	10 G25	
		1247	29.84	10	-10	32	270	15 G25	
		1450	29.94	8.5	-15	26	270	15 G25	
		1557	30.01	6	-15	31	270	15 G25	
72/01/26.01	1/26/72	0943	30.49	- 5	-20	60	270	2-4 G10	MCA Site #5
		1100	30.49	- 4	-16	74	270	2-4 G8	
		1250	30.42	- 2	-18	88	250	2-4 G8	
		1412	30.40	+ 1	-18	-	250	2-4 G8	
		1619	30.49	+ 1	-17	-	250	5-6 G12	
		0905	30.44	- 5	-25	-	270	2-3	
72/01/27.01 Thru 72/01/27/06	1/27/72	1053	30.44	- 4	-21	62	-	-	MCA Site #5
		1315	30.36	- 3	-21	66	270	2-3	
		1434	30.36	- 1	-19	77	270	2-4 G8	
		1535	30.36	- 3	-19	-	270	2-3 G6	
		1605	30.35	- 3	-19	-	270	2-3 G6	



Table III. Test Schedule

Date	Frequency (MHz)	Site	No. of Runs	Transmitting Antenna
24 Jan 72	1545	MCA 5	3	AEL Horn
25 Jan 72	1545	MCA 5	1	AEL Horn
27 Jan 72	1545	MCA 5	4	AEL Horn
27 Jan 72	371.4	MCA 5	2	AT-197
28 Jan 72	229.5	MCA 5	1	AT-197
28 Jan 72	371.4	MCA 5	1	AT-197
28 Jan 72	1545	MCA 5	1	AEL Horn
31 Jan 72	1545	Highlands 21	3	AEL Horn
31 Jan 72	1545	Highlands 21	2	Andrews Discone
1 Feb 72	371.4	Highlands 21	3	AT-197
1 Feb 72	229.5	Highlands 21	2	AT-197
1 Feb 72	1545	Highlands 21	1	AEL Horn
1 Feb 72	2290	Highlands 21	2	AEL Horn
7 Feb 72	229.5	Wayside 19	2	AT-197
7 Feb 72	371.4	Wayside 19	2	AT-197
7 Feb 72	1545	Wayside 19	3	Andrews Discone
8 Feb 72	1545	Wayside 19	2	AEL Horn
8 Feb 72	1545	Wayside 19	2	Andrews Discone
8 Feb 72	1545	Wayside 19B	3	AEL Horn
9 Feb 72	371.4	Wayside 19B	2	AT-197
9 Feb 72	1545	Wayside 19B	2	AEL Horn
9 Feb 72	1545	Wayside 19B	3	AEL Horn (Horiz. Pol.)
14 Feb 72	371.4	Wayside 19B	3	T-29 (Vert. Pol.)
14 Feb 72	371.4	Wayside 19B	2	T-29 (Horiz. Pol.)
14 Feb 72	229.5	Wayside 19B	2	T-29 (Vert. Pol.)
14 Feb 72	229.5	Wayside 19B	2	T-29 (Horiz. Pol.)
16 Feb 72	371.4	Wayside 19B	2	Emco 3101 (Circular P.)
16 Feb 72	229.5	Wayside 19B	3	Emco 3101 (Circular P.)
16 Feb 72	1545	Wayside 19B	3	Emco 3102 (Circular P.)
17 Feb 72	1545	Wayside 9	3	AEL Horn
17 Feb 72	1545	Wayside 9	2	Andrews Discone
18 Feb 72	1545	Wayside 9	2	AEL Horn
18 Feb 72	1545	Wayside 9	2	Andrews Discone
18 Feb 72	371.4	Wayside 9	2	AT-197
18 Feb 72	229.5	Wayside 9	3	AT-197
10 Mar 72	371.4	Wayside 19	4	AT-197
10 Mar 72	371.4	Wayside 19B	2	AT-197
10 Mar 72	371.4	Wayside 19B	2	Emco-3101 (Circ. Pol.)
10 Mar 72	229.5	Wayside 19B	2	Emco-3101 (Circ. Pol.)
10 Mar 72	229.5	Wayside 19B	1	T-29 (Vert. Pol.)
10 Mar 72	229.5	Wayside 19B	1	T-29 (Horiz. Pol.)
10 Mar 72	371.4	Wayside 19B	1	T-29 (Horiz. Pol.)
10 Mar 72	371.4	Wayside 19B	1	T-29 (Vert. Pol.)
13 Mar 72	1545	Wayside 19	2	AEL Horn
13 Mar 72	1545	Wayside 19	2	Andrews Discone
13 Mar 72	1545	Wayside 19B	2	AEL Horn
13 Mar 72	1545	Wayside 19B	2	AEL Horn (Horiz. Pol.)
13 Mar 72	1545	Wayside 19B	1	Emco-3102 (Circ. Pol.)
14 Mar 72	371.4	Wayside 9	2	AT-197
14 Mar 72	229.5	Wayside 9	2	AT-197
14 Mar 72	1545	Wayside 9	2	Andrews Discone
14 Mar 72	1545	Wayside 9	2	AEL Horn

Table IV. Test Data Sheet

TEST DATA SHEET									
OPER. FREQ.		1545 MHz		DATE: 9 FEBRUARY 72		START: 1320 HRS		FT.	
SITE		LOCATION		REC. SITE ANT. HT.		ANT. GAIN (dB)		CAUSE LOSSES (dB)	
TRANSMITTER		WAYSIDE 19B		XMIT. PWR. 44 dBm		TYPE ANTENNA		ANT. GAIN (dB)	
RECEIVER		ECOM HEX.		PWR. 44 dBm		HORN		14.4	
TOTAL ANT. GAIN (XMIT + REC.)		14.4 + 0.3 = 14.7 dB		RCVD. ANT. HEIGHT ABOVE SEA LEVEL		140 FT.		RCVD. ANT. HEIGHT ABOVE SEA LEVEL	
TOTAL CABLE LOSS (XMIT + REC.)		5.7 + 1.2 = 6.9 dB		RCVD. ANT. HEIGHT ABOVE SEA LEVEL		140 FT.		RCVD. ANT. HEIGHT ABOVE SEA LEVEL	
XMIT. SITE		RCVD. PWR. (dBm)		PATH LOSS (dB) = (ESP) - (RCVD. PWR.)		AVG. PATH. LOSS (dB)		NO. OF SAMP	
TEST		TEST		TEST		TEST		TEST	
720209-01		720209-02		720209-01		720209-02		720209-01	
8	97	88	88	149	140	149.5	2	149.5	2
10	96	92	92	148	144	146.0	2	146.0	2
15	82	82	82	134	134	134.0	2	134.0	2
20	85	83	83	137	135	136.0	2	136.0	2
25	80	80	80	132	132	132.0	2	132.0	2
30	81	81	81	133	133	133.0	2	133.0	2
35	81	81	81	133	133	133.0	2	133.0	2
40	76	75	75	128	127	127.5	2	127.5	2
45	72	70	70	124	122	123.0	2	123.0	2
50	68	68	68	120	120	120.0	2	120.0	2
55	65	65	65	117	117	117.0	2	117.0	2
60	62	62	62	114	114	114.0	1	114.0	1
65	60	60	60	112	112	112.0	1	112.0	1
END 720209-01 - 1355 START 720209-02 - 1350 END 720209-02 - 1400									
MEAN READING OF CHART RECORDINGS									



Figure 1. Map of the Test Area

---


---

PROPAGATION PATH LOSS

DATE: 9 FEBRUARY 72 TEST RUN S/N: 420209-02

PATH: WAYSIDE SITE No. 19B TO ECOM HEXAGON

OPER. FREQ.: 1545 MHz

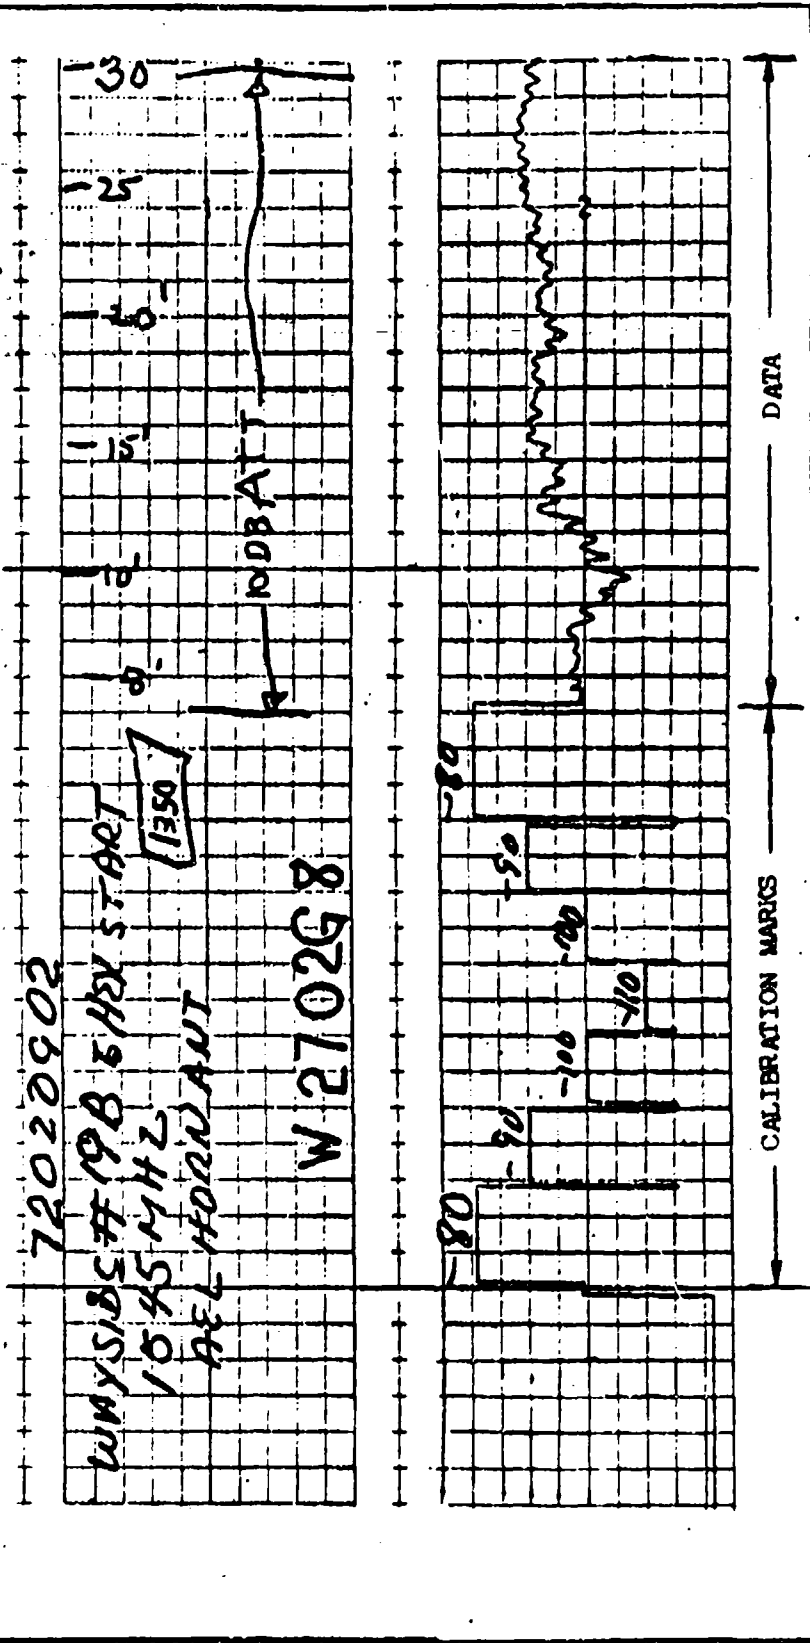

**Figure 2. Sample Received Signal Recording**

PROPAGATION PATH LOSS  
DATE: 9 FEBRUARY 72 TEST RUN SIN: 720209-01-02  
PATH: WAYSIDE SITE No. 19B TO ECOM HEXAGON

OPER. FREQ.: 1545 MHz

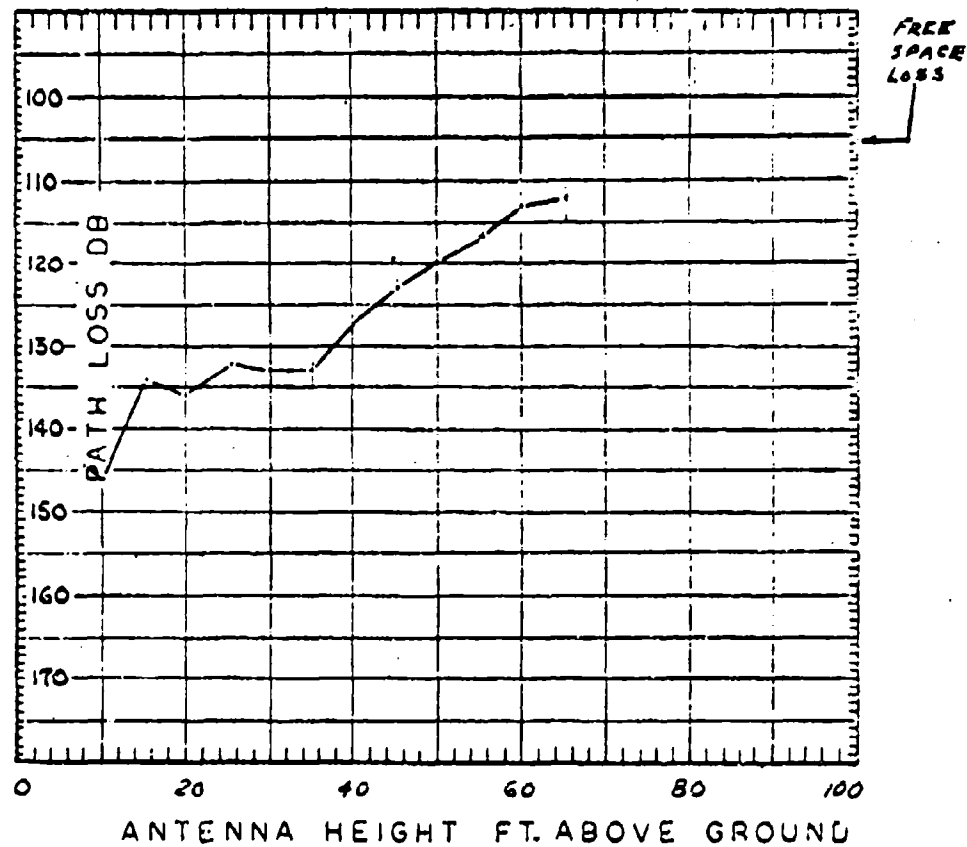


Figure 3. Sample Propagation Path Loss Graph

#### 4. RECEIVING EQUIPMENT

An Airborne Instruments Laboratory (AIL) Model 707 Spectrum Analyzer was used as the receiver for these tests. The output of this analyzer is a dc voltage proportional (in dB) to the input signal strength. The receiving antenna was connected to the spectrum analyzer through a low loss cable for tests at the lower frequencies, and through a low loss cable and a 20-dB preamplifier at the higher frequencies. The output of the spectrum analyzer was recorded on a strip chart recorder and pertinent data was annotated on the strip chart.

An accurately calibrated source of RF was used to calibrate the receiving setup. This RF source was substituted for the antenna during the calibration procedure. All other connections were unchanged (Figure 4). In this manner, the entire receiver setup was calibrated since the signal from the calibrating source passed through the identical path as the received signal from the antenna. To calibrate a strip chart, several calibrated levels of RF were fed into the receiving setup and recorded on the strip chart. On the strip chart, each level was marked with its corresponding signal level which was then used as the standard in reducing the data (Figure 2).


#### 5. TRANSMITTING EQUIPMENT

The transmitter and the RF power and frequency monitoring equipment were installed in an S-280 shelter which was mounted on a M-35 military truck (Figure 5). The transmitter power oscillator was a MICRODOT Model 445. This power oscillator, when used in conjunction with several plug-in modules, provided a CW RF source continuously variable between 2 and 2,500 MHz, with a power output as high as 50 watts.

The RF power output from the transmitter was continuously monitored with a BIRD THRULINE Model 43 WATTMETER, which could also be used to measure reflected power to check for cable or antenna malfunctions. A SYSTRON DONNER Model 1037 Frequency Counter was used to monitor the RF frequency. The binary coded decimal (BCD) output from this frequency counter was fed to a HEWLETT PACKARD D/A CONVERTER Model R50562A, whose output was plotted on one channel of a BRUSH MARK 220 strip chart recorder. The output of the thruline wattmeter was recorded on the second channel of the strip chart recorder (Figure 6). Thus, there was a continuous record of transmitter power output and frequency.

#### 6. TRANSMITTING SITES

The mobile transmitter was located at many different sites for these tests. These sites included areas where permanent or semipermanent antennas were installed, as well as places where the portable antenna mast was used. This section contains brief descriptions of these sites, the physical environment in the vicinity of the antenna which could affect propagation, and terrain profiles for the sight line. The sight line is defined as an imaginary straight line from the transmitting antenna to the receiving antenna. The locations of most of the various transmitting sites are also shown on the map in Figure 1.

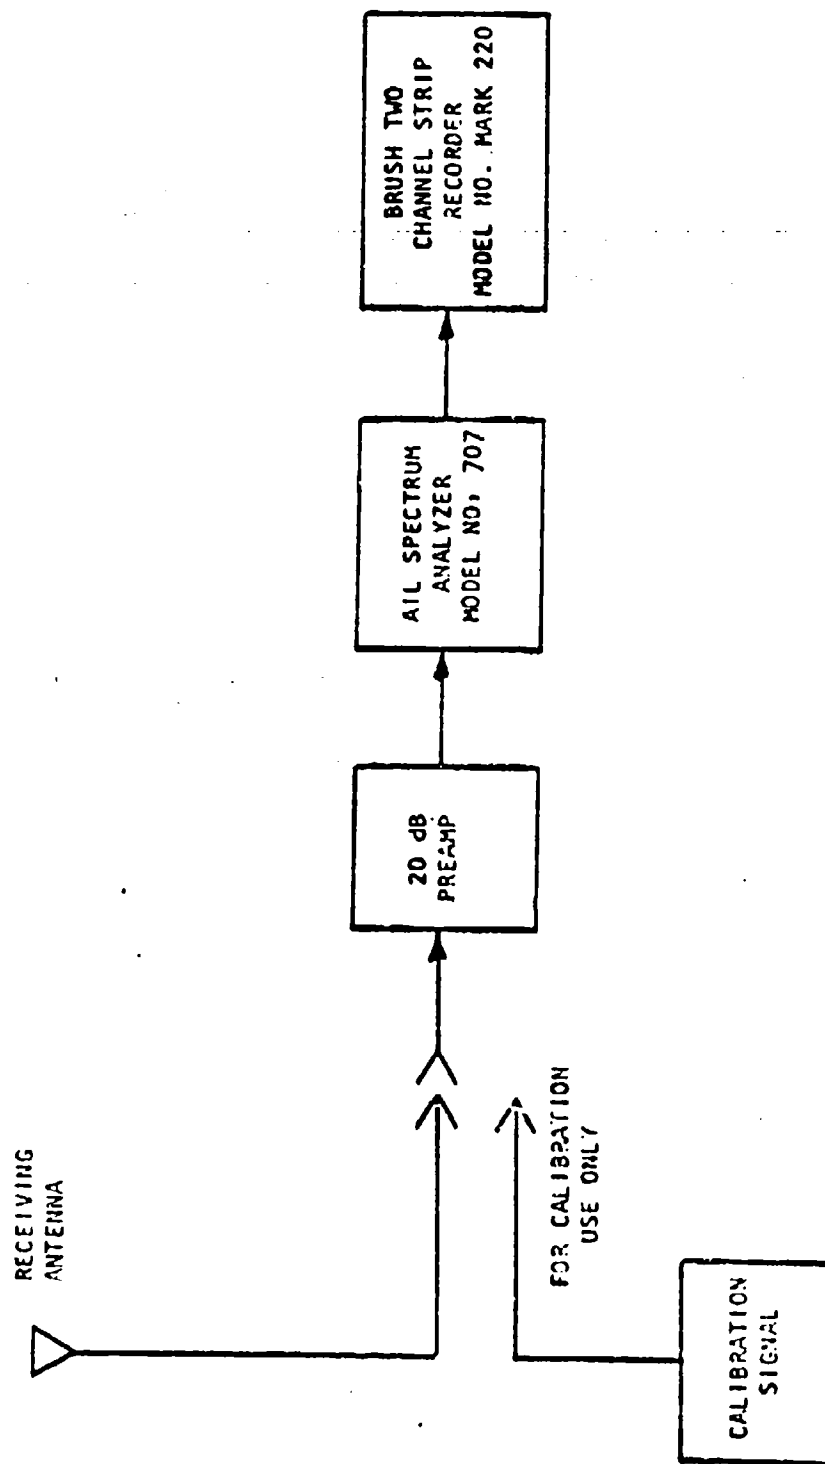


TYPICAL EQUIPMENT SETUP FOR  
MEASURING AND RECORDING RECEIVER SIGNAL

Figure 4. Receiver Recording Equipment



Figure 5. Transmitter Van



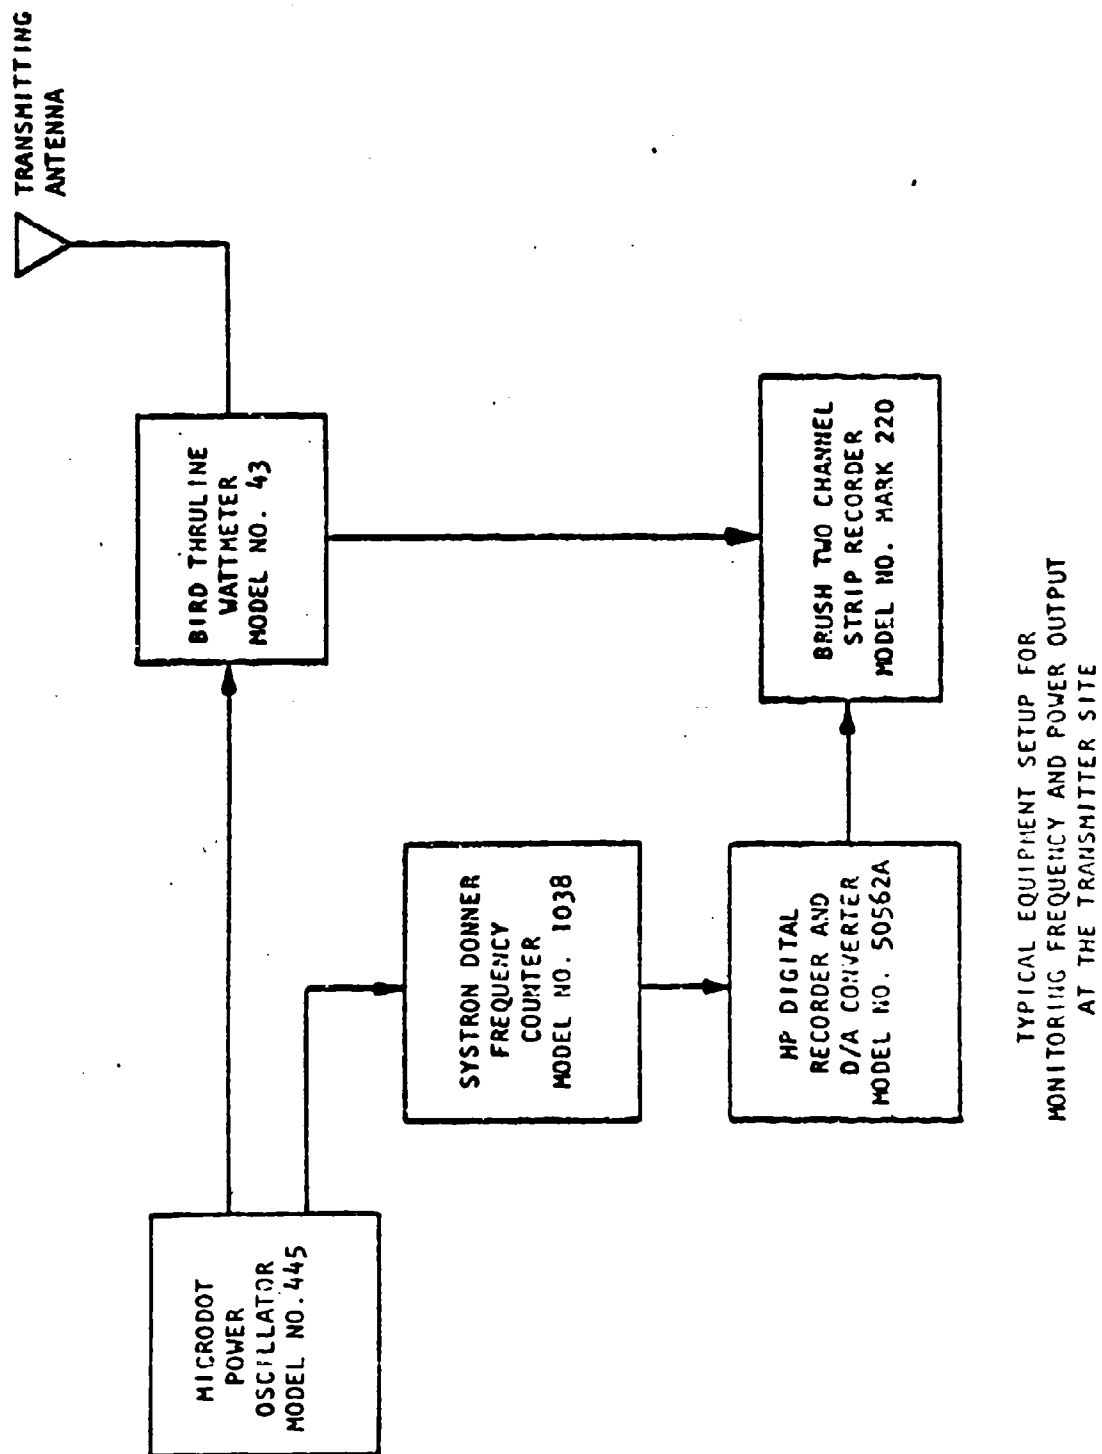

TYPICAL EQUIPMENT SETUP FOR  
MONITORING FREQUENCY AND POWER OUTPUT  
AT THE TRANSMITTER SITE


Figure 6. Transmitter Recording Equipment

a. AEL, Monmouth County Airport Site 5.

Site 5 (Figures 7 and 8) is located among 20-foot pine trees. The sight line is through this wooded area for 150 feet to a clear area, then 500 feet over a downward slope in the direction of the receiver location. To the right of the sight line, at 45 degrees, 130 feet away, there is a metal hanger the side of which runs +30 degrees relative to the sight line.



Figure 7. AEL, Monmouth County Airport Site 5

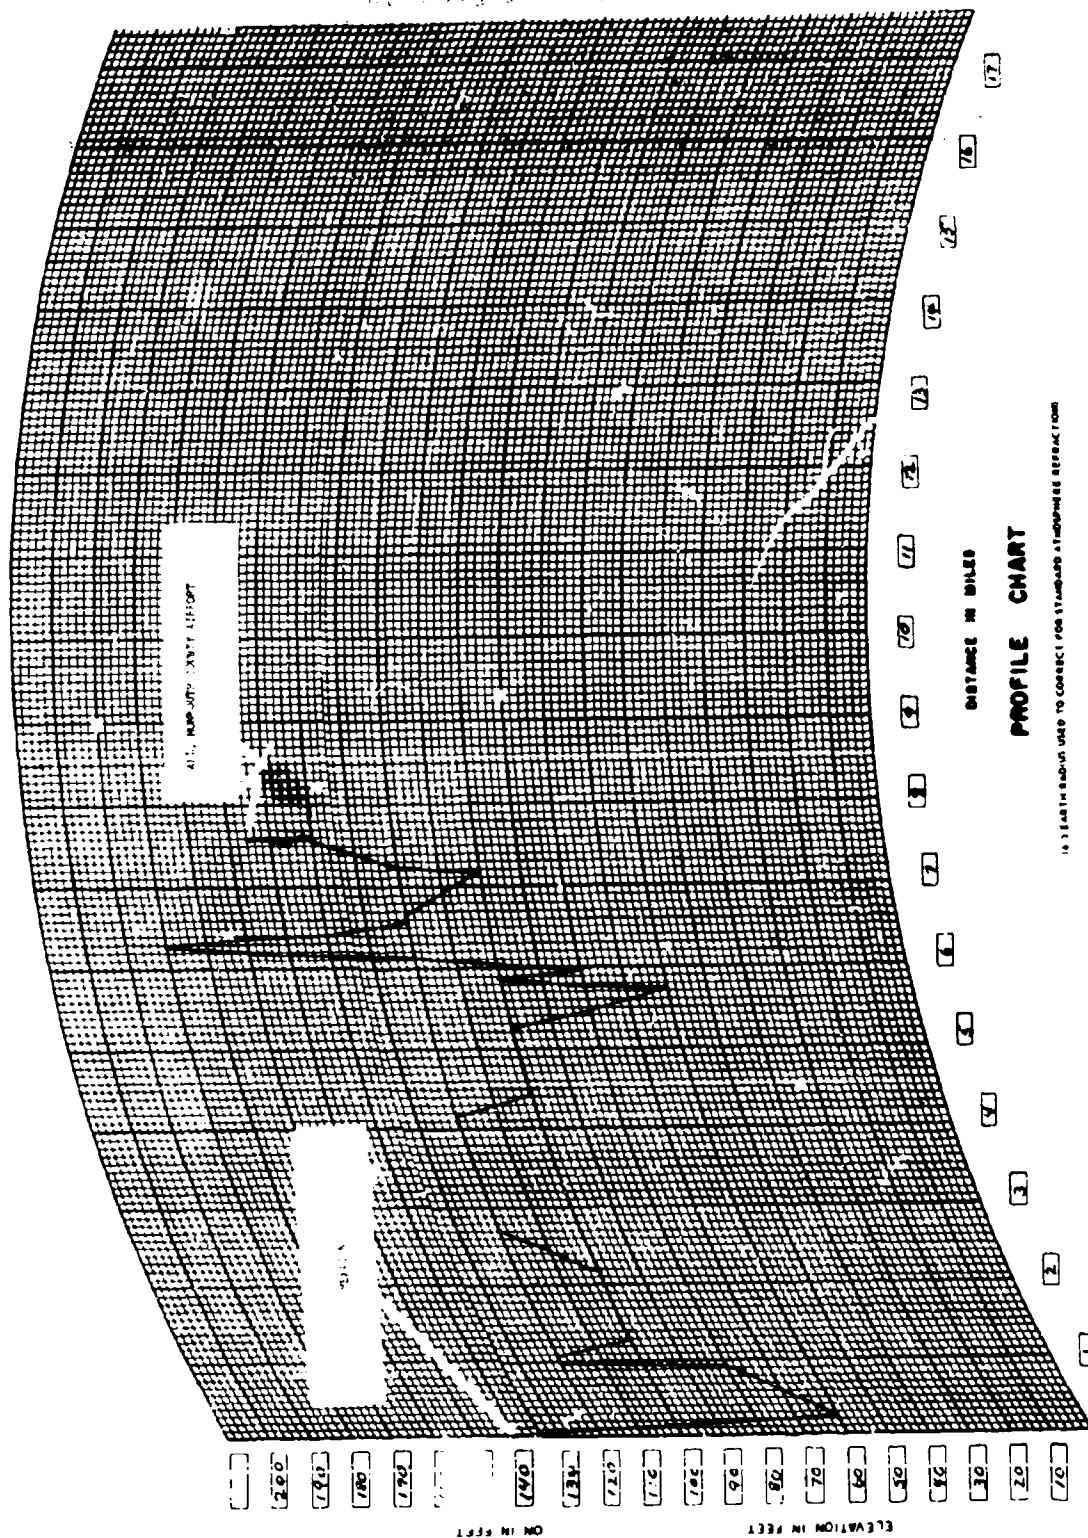

DA FORM 11-47 PREVIOUS EDITION OF THIS FORM IS OBSOLETE


Figure 8. Site 5 Profile Chart

b. Wayside Site 9.

Site 9 (Figures 9 and 10) is located in a grass covered field. In line with the receiving site is a shallow 5-foot rise. A metal screen ventilator, 2 feet high by 3 feet in diameter is located 70 feet from the transmitter. Beyond the ventilator, at 150 feet, there is a pine tree 20 feet tall. Three-hundred feet away there are additional trees, 20 feet in height. To the left of the sight line at an angle of 15 degrees and a distance of 300 feet from the transmitter, there is a pole 40 feet tall with cables leading to three buildings beyond.



Figure 9. Wayside Site 9

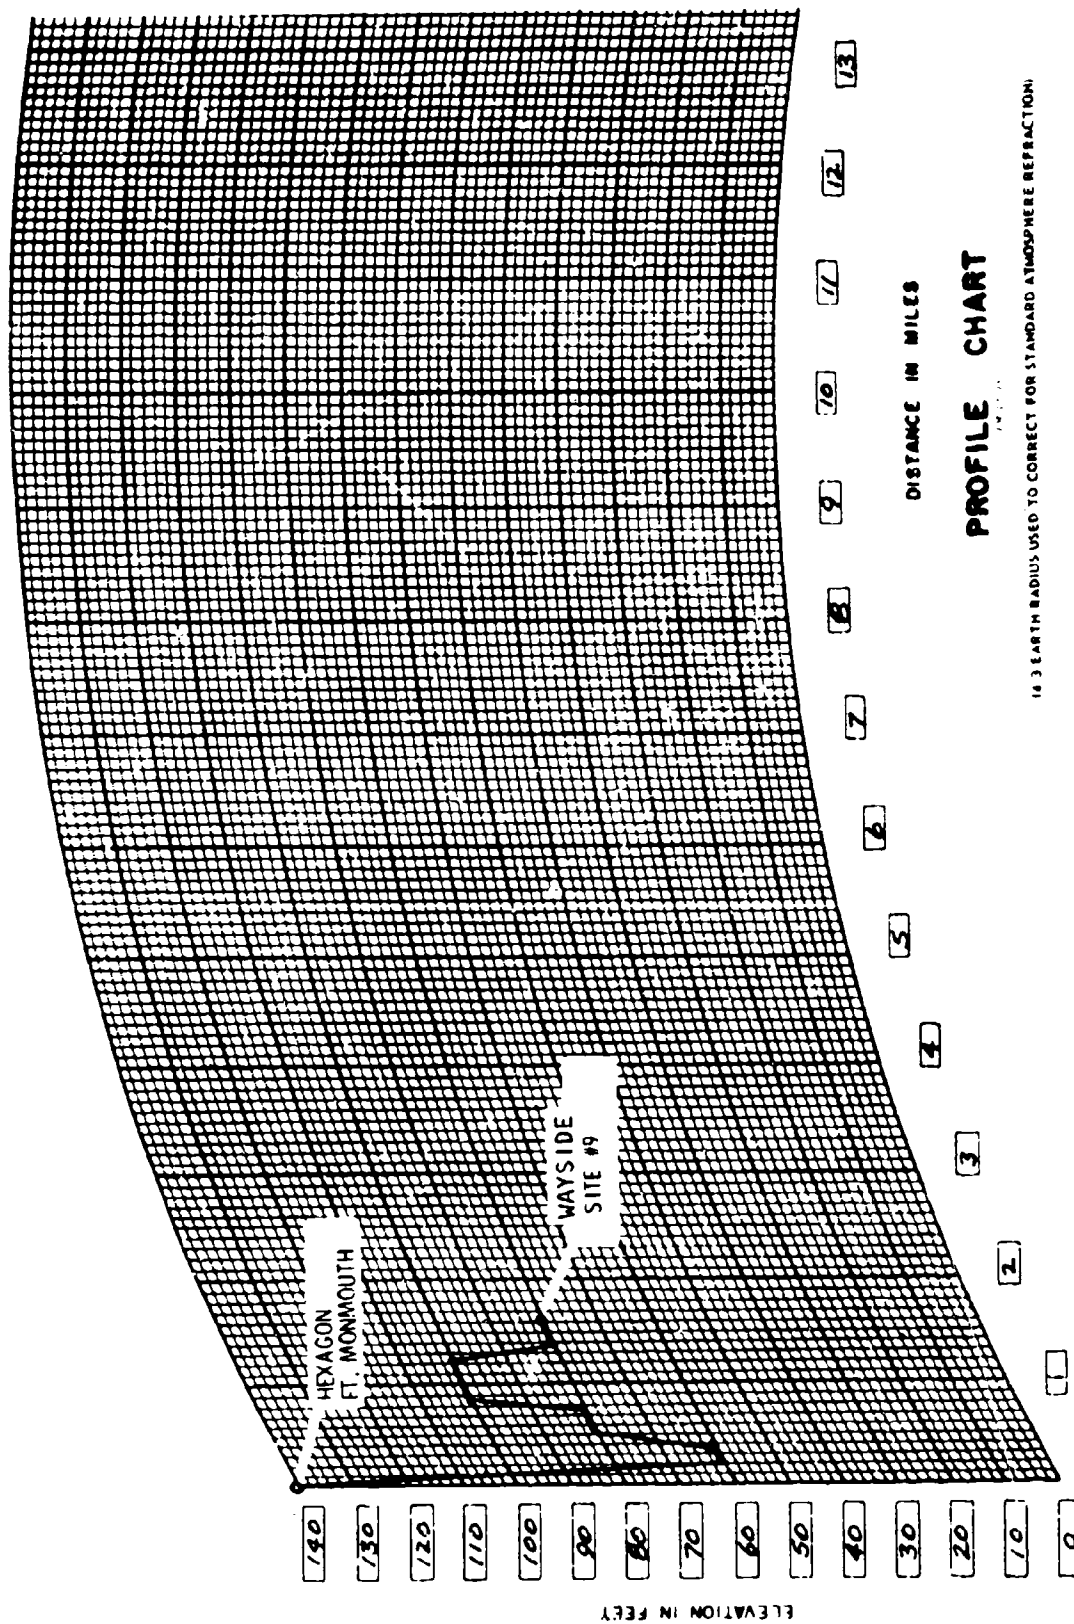

14.3 EARTH RADIUS USED TO CORRECT FOR STANDARD ATMOSPHERE REFRACTION

DA FORM 11-47 PREVIOUS EDITION OF THIS FORM IS OBSOLETE  
1 JUL 65


Figure 10. Site 9 Profile Chart

c. Wayside Site 9A.

Site 9A (Figures 11 and 12) is located among 30-foot tall trees with approximately 6-inch diameter trunks. In line with the receiving site is a 130 foot stretch of wooded area, a dirt road, and 400 feet of gradually rising, grassy fields, bordered on the far side by trees 20 feet tall. At a distance of 300 feet from the transmitter, in line with the receiving site is a metal screen ventilator, 2 feet high, 3 feet in diameter. The terrain profile chart for this site is the same as for site 9 since it is located in the woods just a few feet from site 9.



Figure 11. Wayside Site 9A

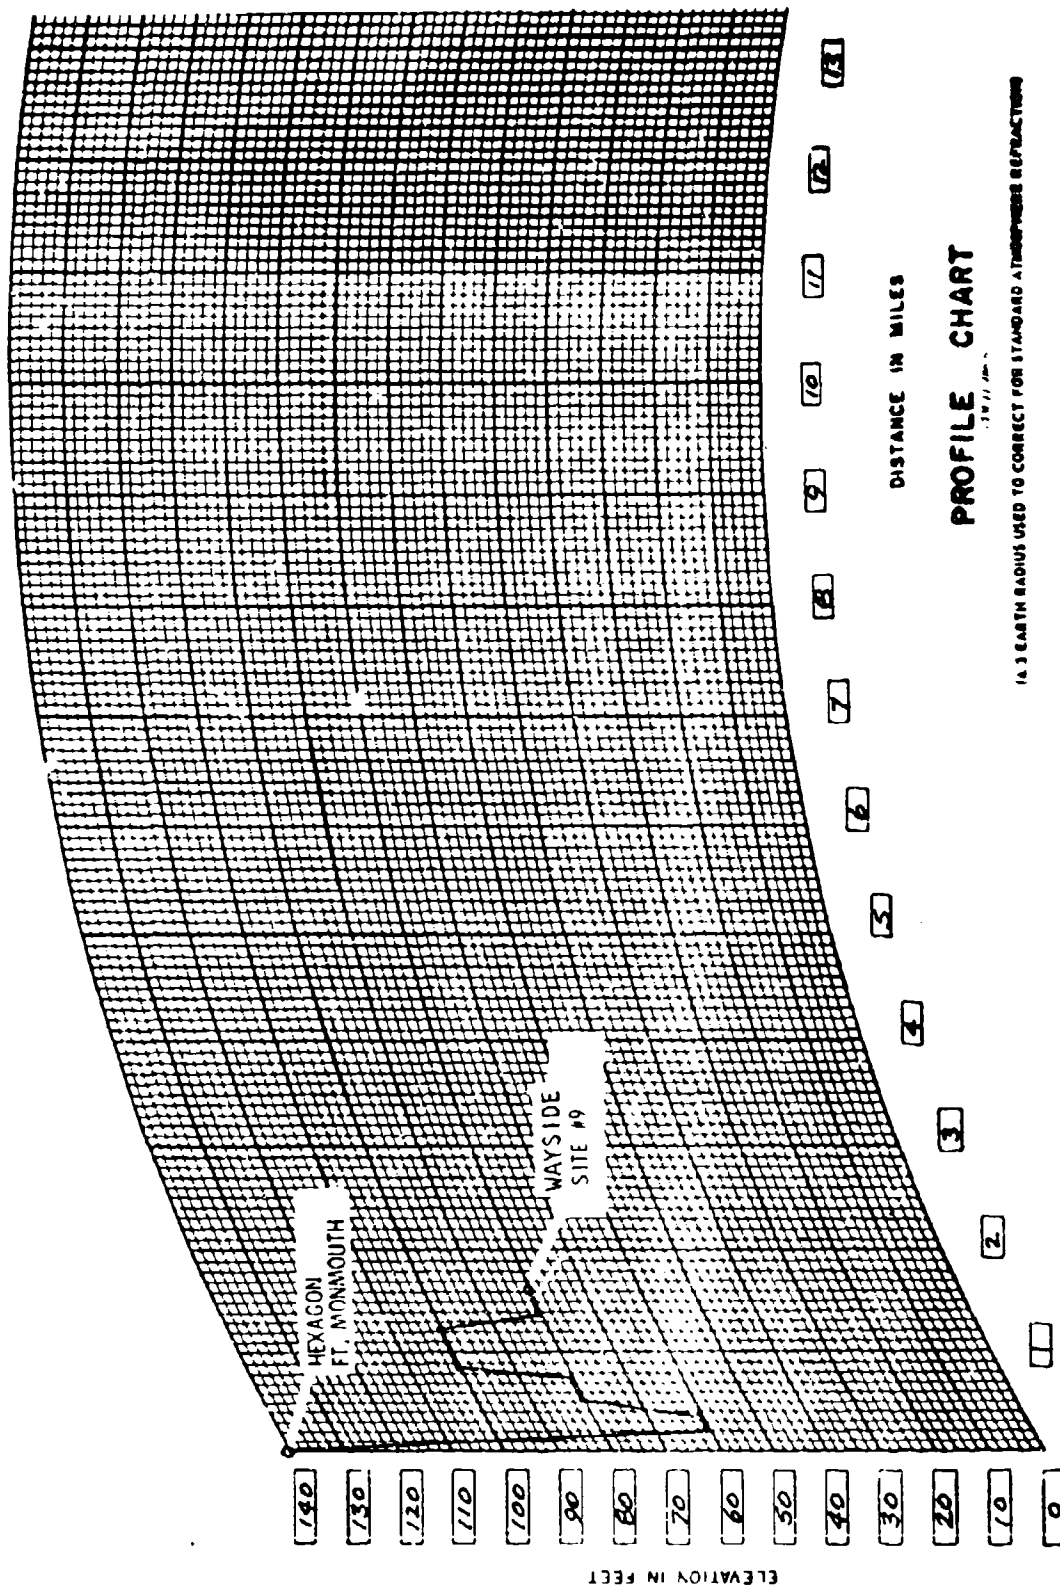

DA FORM 11-47 PREVIOUS EDITION OF THIS FORM IS OBSOLETE  
1 JUL 65

Figure 12. Site 9A Profile Chart

d. Wayside Site 10.

Site 10 (Figures 13 and 14) is located in a heavily weeded field. A guy wire crosses the sight line at a distance of 70 feet from the transmitter. There are two metal sheds, located 100 feet and 200 feet, respectively, from the transmitter. In addition, three wires 60 feet high cross the sight line 100 feet and again 275 feet from the transmitter. Three-hundred twenty-five feet from the transmitter, the sight line passes through a heavily wooded area.


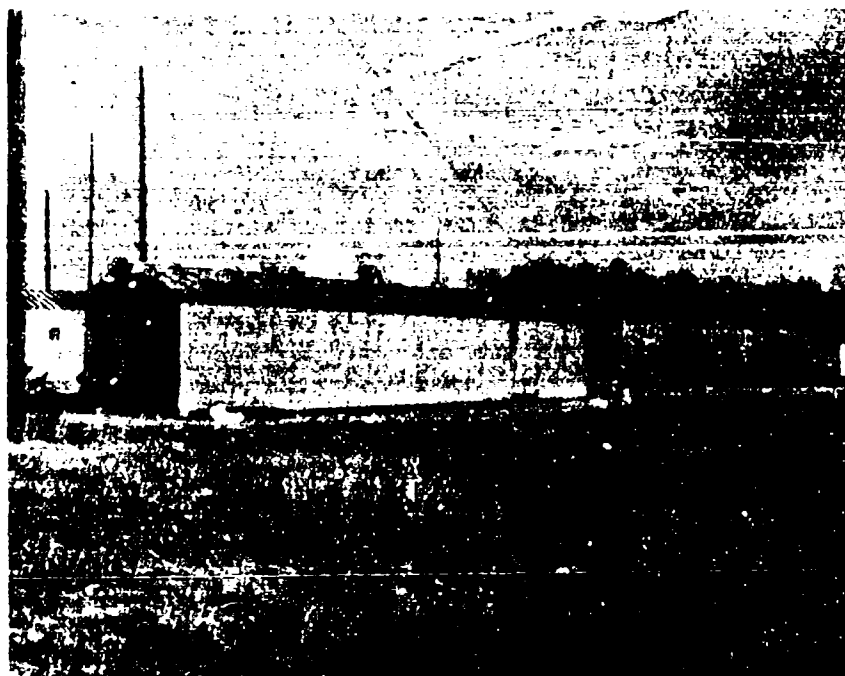


Figure 13. Wayside Site 10



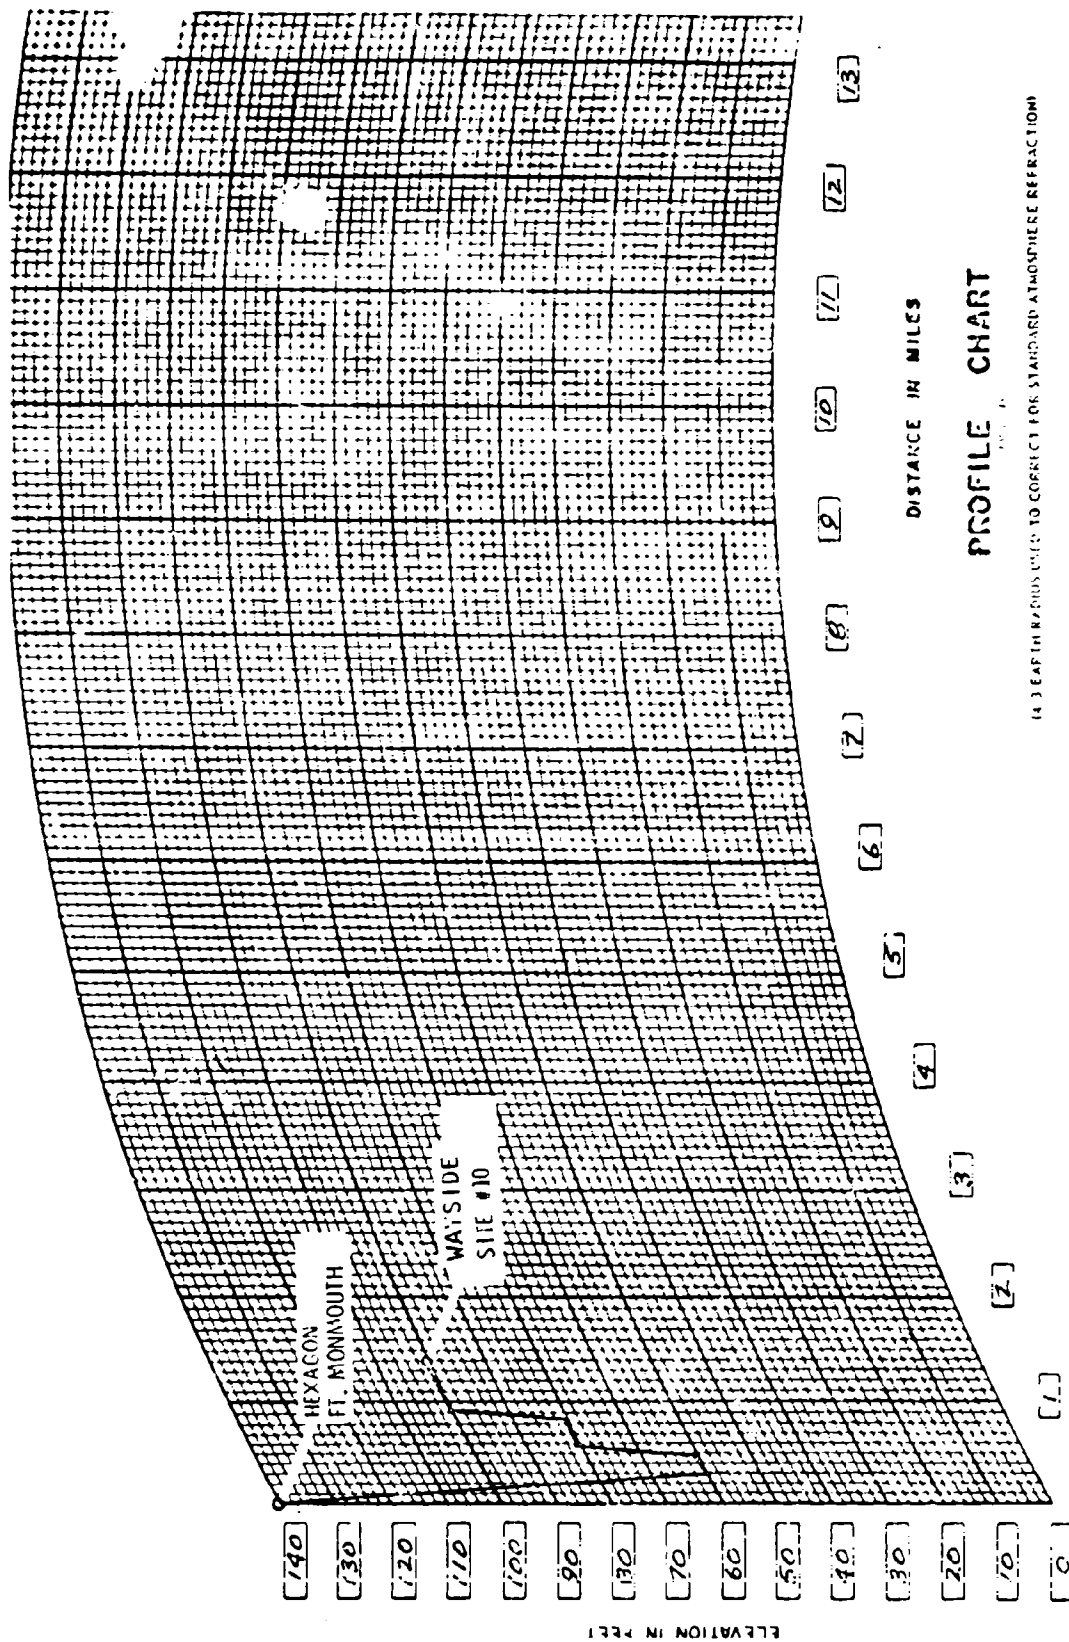

14.3 EAF IN RADII USED TO CORRECT FOR STANDARD ATMOSPHERE REFRACTION

DA FORM 11-47 PREVIOUS EDITION OF THIS FORM IS OBSOLETE  
1 JUL 65


Figure 14. Site 10 Profile Chart

e. Wayside Site 14.

Site 14 (Figures 15 and 16) is located in the middle of a 15-foot wide stream which runs perpendicular to the sight line. There is an upward slope along the sight line rising to a level 15 feet above the transmitter site. The crest of this rise is 30 feet from the transmitter site. There are 15-foot trees on top of this rise. One-hundred feet from the transmitter are four 40-foot trees, then brush for 200 feet, and woods of 30-foot trees, all on a plane 15 feet above site 14.



Figure 15. Wayside Site 14

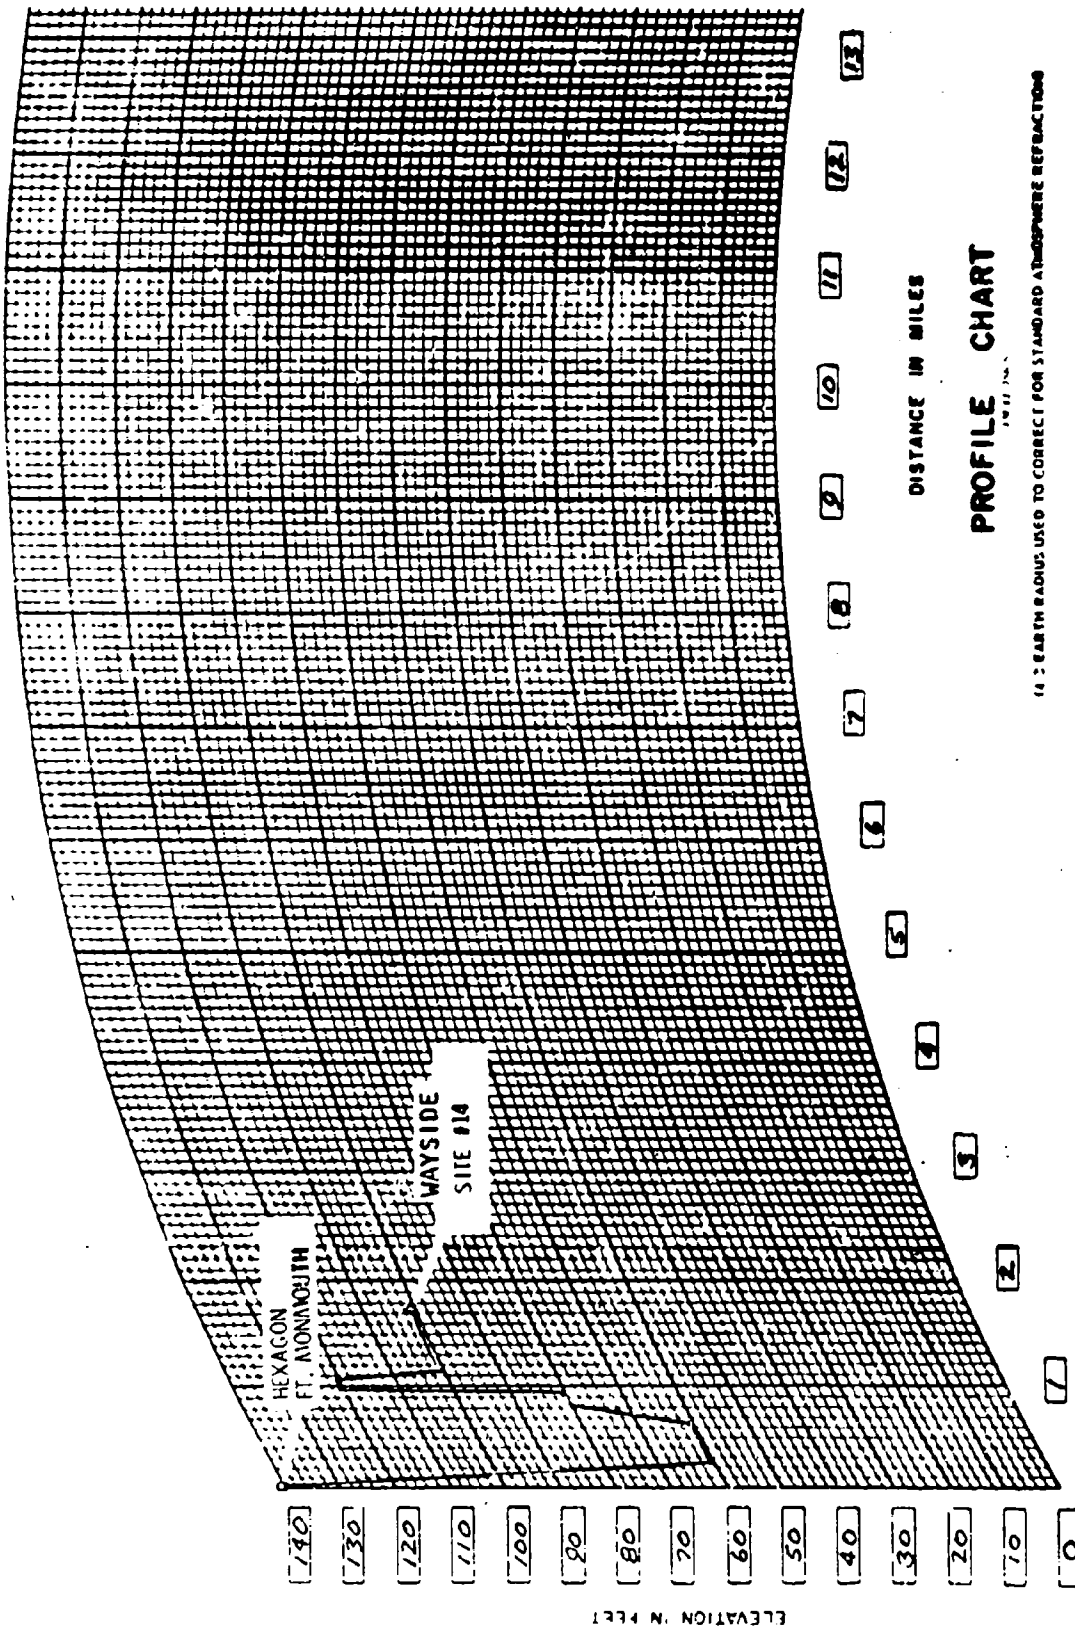

DA FORM 11-47 PREVIOUS EDITION OF THIS FORM IS OBSOLETE  
1 JUL 45

Figure 16. Site 14 Profile Chart

f. Wayside Site 19.

Site 19 (Figures 17 and 18) is located in a heavily weeded field. In line with the receiver site, 340 feet from the transmitter, is a large van beyond which there is a forest of trees 40-feet tall. One-half mile further along the sight line and perpendicular to it there are three large power cables suspended from metal towers 60 feet in height. Thirty feet to the left of the van is a second van, and at 40 and 60 feet, respectively, to the left of this van there are two 45-foot high towers. Thirty degrees to the right, and 100 feet away from the transmitter site 19, there are two metal huts, 15 feet high, 20 feet in diameter. Six hundred feet from the transmitter there is a ground plane, 300 feet in diameter with a 40-foot pole located at its center.



Figure 17. Wayside Site 19

# TERRAIN PROFILE - WAYSIDE 19 TO HEX

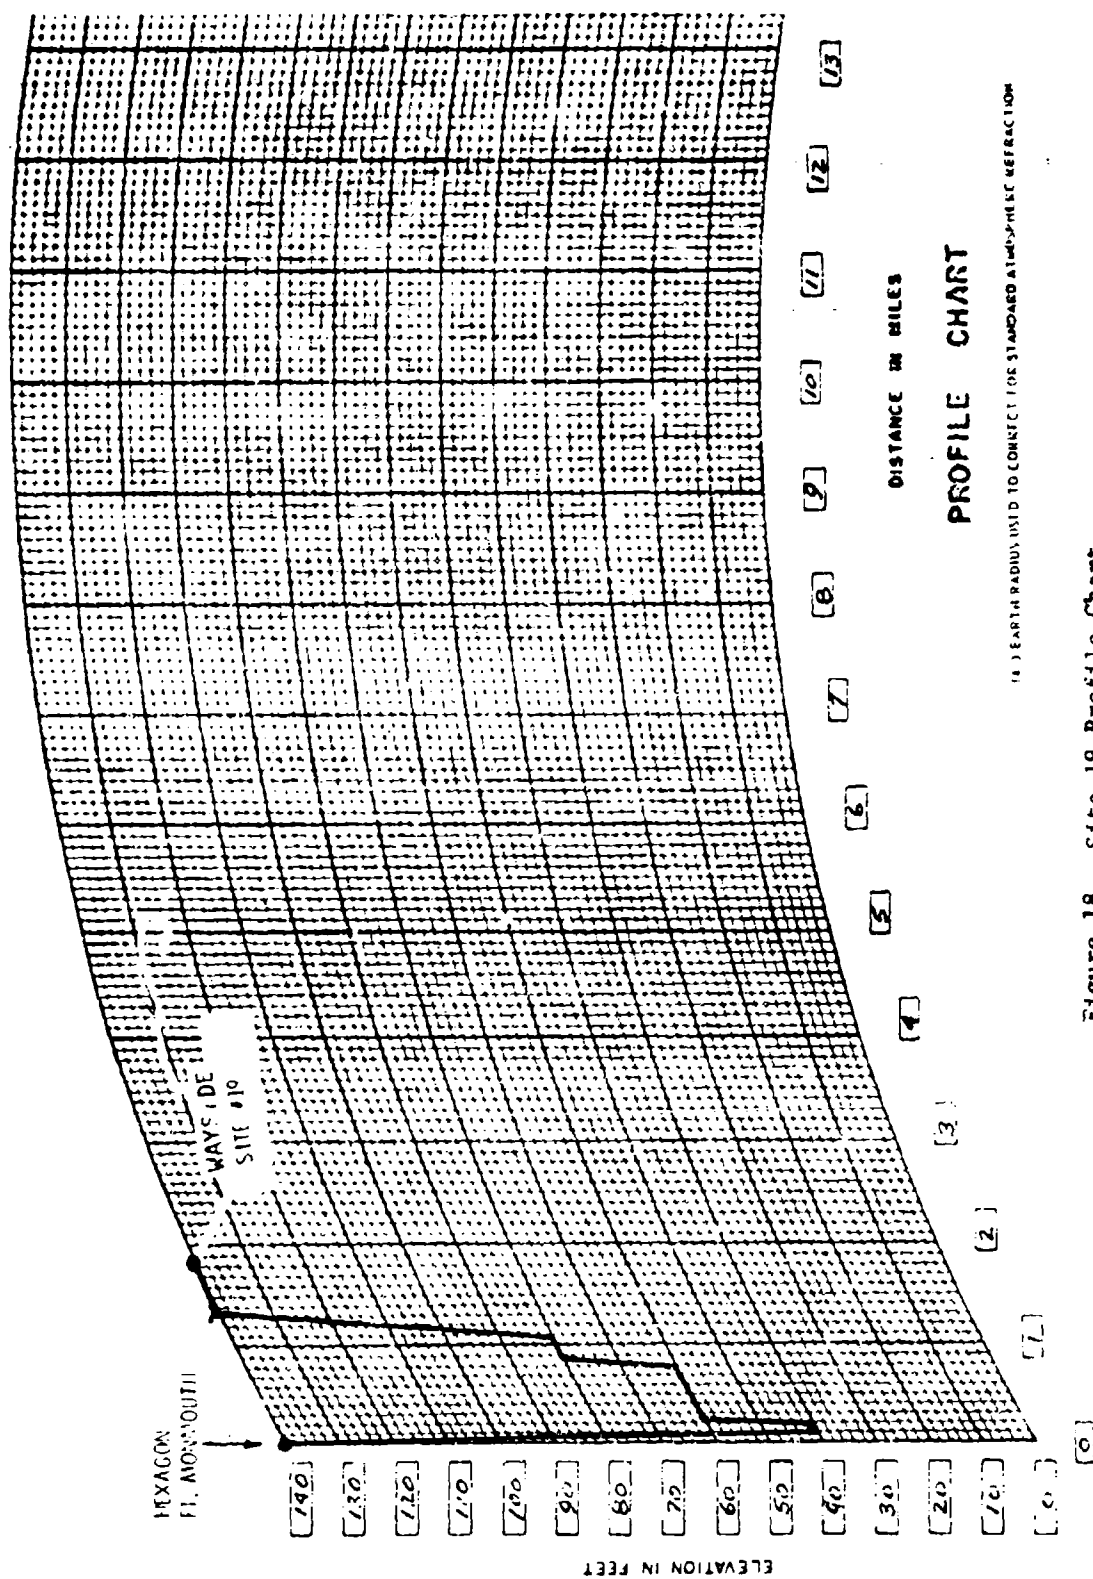


Figure 18. Site 19 Profile Chart

8. Wayside Site 19B.

Site 19B (Figure 19) is located atop an 85-foot tower which is 45 feet behind site 19 and 40 feet to the right, thereby placing site 19 obstacles 40 feet to the left of the receiver sight line. The receiver site is visible, through the power lines, which cross the sight line approximately 1.9 miles from the transmitter site.

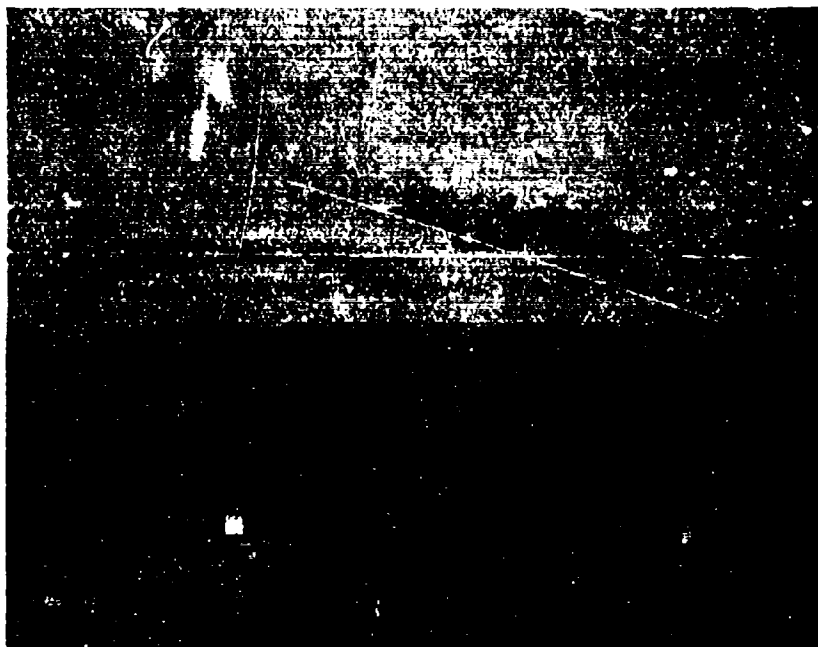


Figure 19. Wayside Site 19B

h. Evans Area "F" Site 20.

Transmitter site 20 (Figures 20 and 21) is located in a vine covered field. In line with the sight path are five 15-foot high cables and a row of trees 20 feet tall, running diagonally from 20 feet to the right of the transmitter site to a point 20 feet to the left of the sight line and 120 feet away from the transmitter site. There is a 40-foot high pole at that point. The aforementioned cables and line of trees cross the sight line 60 feet from the transmitter site. Along the sight line, 120 feet from the transmitter, is a road running approximately perpendicular to the sight line. There are 40-foot tall poles on both sides of this road. The poles support cables at the 30- and 40-foot levels. Two-hundred and twenty feet along the sight line, there is a dual road that runs off 45 degrees to the right of the sight line. Cyclone fence, on both sides of the depressed road, is in close proximity to the sight line at points 220 and 400 feet from the transmitter site. Beyond the farther fence, there are trees 40 feet tall located on a downward slope.



Figure 20. Evans Area "F" Site 20

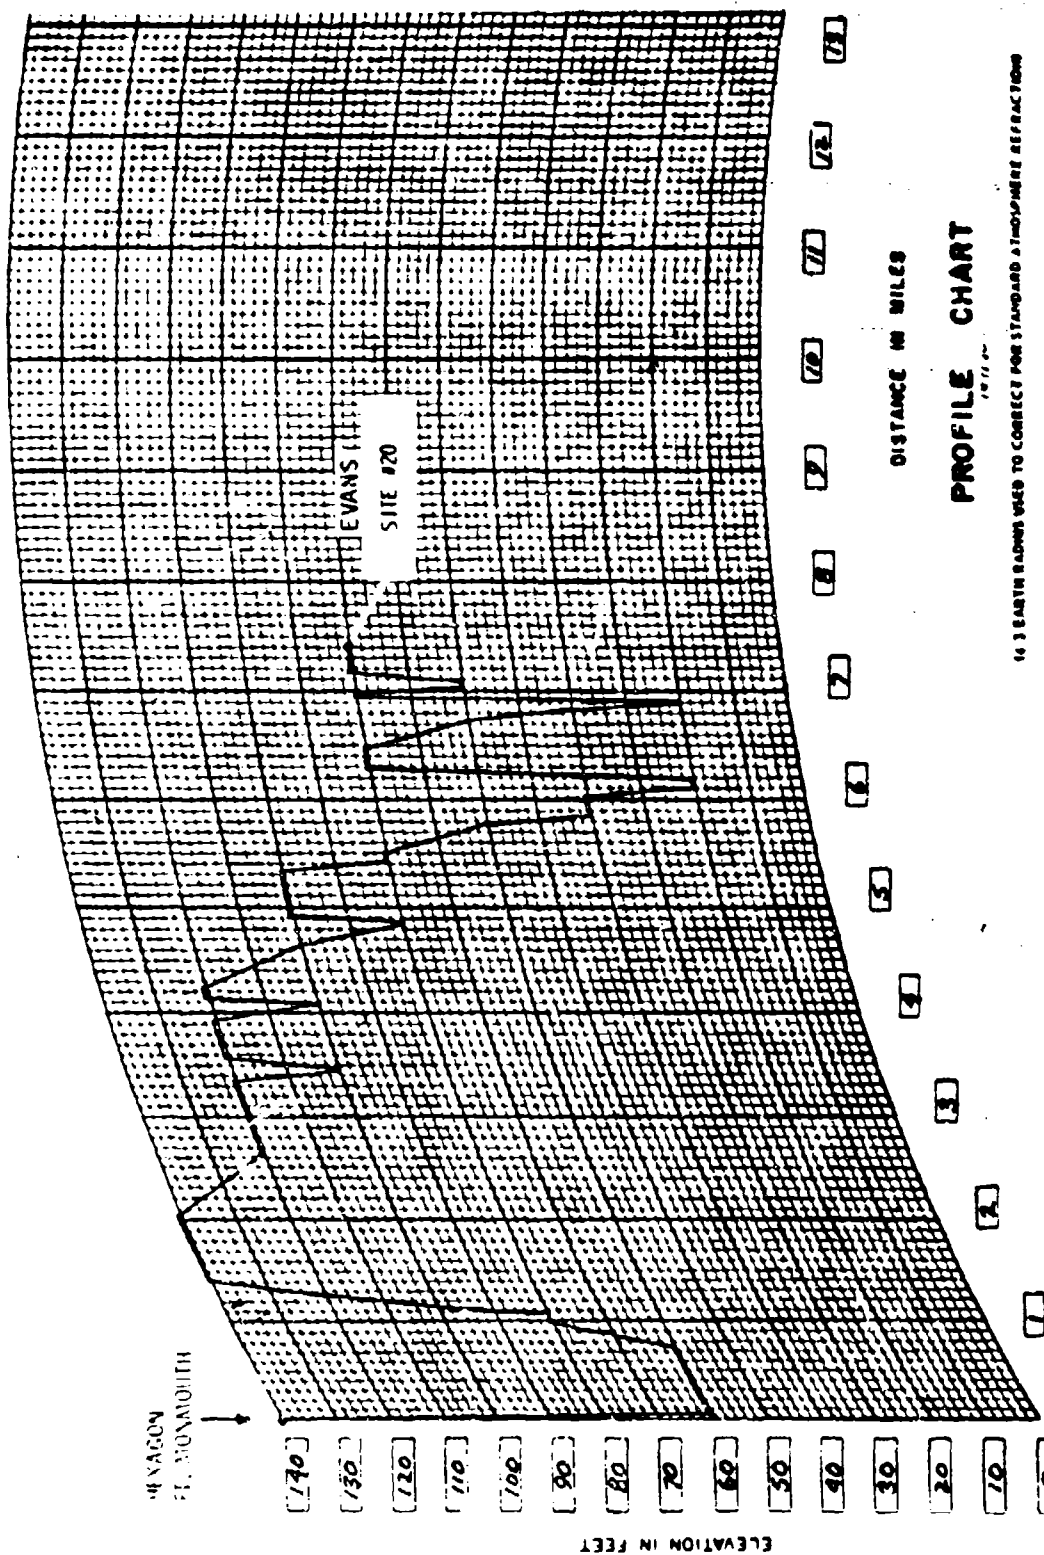


Figure 21. Site 20 Profile Chart



## 7. SAMPLE DATA

This paragraph contains a complete sample data run and data reduction in order to illustrate the procedures used and to enable the reader to better interpret the data contained in paragraphs 8 and 9. The examples are excerpts from the tests conducted on February 9, 1972.

Figure 22 is a sample of the test condition log, which is generally self-explanatory. Tests were normally conducted with vertical polarization on both the transmit and receive ends, unless otherwise noted. This log sheet indicated that test runs 720209-01 and 720209-02 were done with vertical polarization, and that in run 720209-03, horizontal polarization was used in the transmitting antenna. The receiving antenna was always vertically polarized.

Figures 23 and 24 are full-size reproductions of the strip chart recording of run 720209-02. It shows that the run was started at 1350 hours, the AEL horn antenna was used, and the frequency was 1,545 MHz. The wind was from 270 degrees at 2 knots, gusting to 8 knots. The lower section of the strip chart has the calibration marks on it, showing the -80, -90, -100, and -100 dBm levels. The wiggly line is the recorded signal strength and the annotations on the upper section show the height of the transmitting antenna. The notation 10 dB ATT between 8 and 30 feet indicates the signal was attenuated 10 dB. In order to place the trace into the most linear section of the recording equipment, attenuation was added whenever the signal strength was of such a magnitude that it would cause the trace to fall near the edge of the recording. During the portion of the test run between 30 and 65 feet, 20 dB of attenuation was added. Obviously, these attenuation values have to be added to the signal strength read from the graph. The test ended at 1,400 hours, as indicated, and the equipment was recalibrated at the end of the test to assure us that nothing had drifted sufficiently to invalidate the data.

Figure 25 shows a Test Data Sheet, which is used for establishing path losses with the data from the strip chart recording. As shown in the section on the upper right of this sheet, the equivalent system (input) power is a function of the transmitted power, the antenna gains, and cable losses. The received signal strength is scaled off the strip chart recording and logged in the RCVD PWR column as a function of transmitting antenna height above ground. This particular test data sheet shows the data from two consecutive runs. It should be noted that the received power in dBm was always negative, but for simplicity's sake, the negative signs were omitted on these sheets. The path loss for each test is shown in the next two columns, and the average path loss for each transmitting antenna height together with the number of samples this average is based on, is shown in the last two columns.

Figure 26 is a plot of the average path losses found in test runs 720209-01 and -02, as determined on the test data sheet. The free space loss between the transmitting and receiving stations is also shown. This lets one determine the additional path loss, above that of free space, caused by the physical environment through which the signal is propagated.

# TEST SET-UP AND CONDITIONS

DATE: 9 FEBRUARY 72

TYPE OF TEST: RANGING

PATH LOSS: ✓

CONDITION	TEST RUN S/N <u>720209-01</u>	TEST RUN S/N <u>720209-02</u>	TEST RUN S/N <u>720209-03</u>
TRANSMITTER			
OPER. FREQ.	<u>1545</u>	<u>1545</u>	<u>1545</u>
SITE LOCATION	<u>WAYSIDE 19B</u>	<u>WAYSIDE 19B</u>	<u>WAYSIDE 19B</u>
ANTENNA TYPE	<u>REL HORN</u>	<u>REL HORN</u>	<u>REL HORN</u>
POWER (dBm)	<u>44</u>	<u>44</u>	<u>44</u>
ANTENNA GAIN (dB)	<u>14.4</u>	<u>14.4</u>	<u>14.4</u>
CABLE TYPE	<u>FHJ-4</u>	<u>FHJ-4</u>	<u>FHJ-4</u>
(a) LENGTH (FT)	<u>129</u>	<u>129</u>	<u>129</u>
(b) LOSS (dB)	<u>5.7</u>	<u>5.7</u>	<u>5.7</u>
RECEIVER			
ANTENNA TYPE	<u>ANDREW</u> <u>BICONICAL</u>	<u>ANDREW</u> <u>BICONICAL</u>	<u>ANDREW</u> <u>BICONICAL</u>
ANTENNA GAIN (dB)	<u>0.3</u>	<u>0.3</u>	<u>0.3</u>
CABLE TYPE	<u>RG 319 A/U</u>	<u>RG 319 A/U</u>	<u>RG 319 A/U</u>
(a) LENGTH (FT)	<u>130</u>	<u>130</u>	<u>130</u>
(b) LOSS (dB)	<u>1.2</u>	<u>1.2</u>	<u>1.2</u>
WIND	<u>2-4 G V 270°</u>	<u>2-4 G 8 270°</u>	<u>2-4 G 10 270</u>
TEMP.	<u>29°F</u>	<u>29°F</u>	<u>29°F</u>

REMARKS: RUN 720209-03  
HORIZONTAL POLARIZATION

OPERATORS: D. LACLAIR XMTR.

J. VANGA RCVR.

Figure 22. Typical Test Sheet

# PROPAGATION PATH LOSS

DATE: 2/1/72 TEST RUN S/N: 120209-02

PATH: WYSS DE SITE NO. 128 TO ECCM HEXAGON

OPER. FREQ.: 1545 MHz

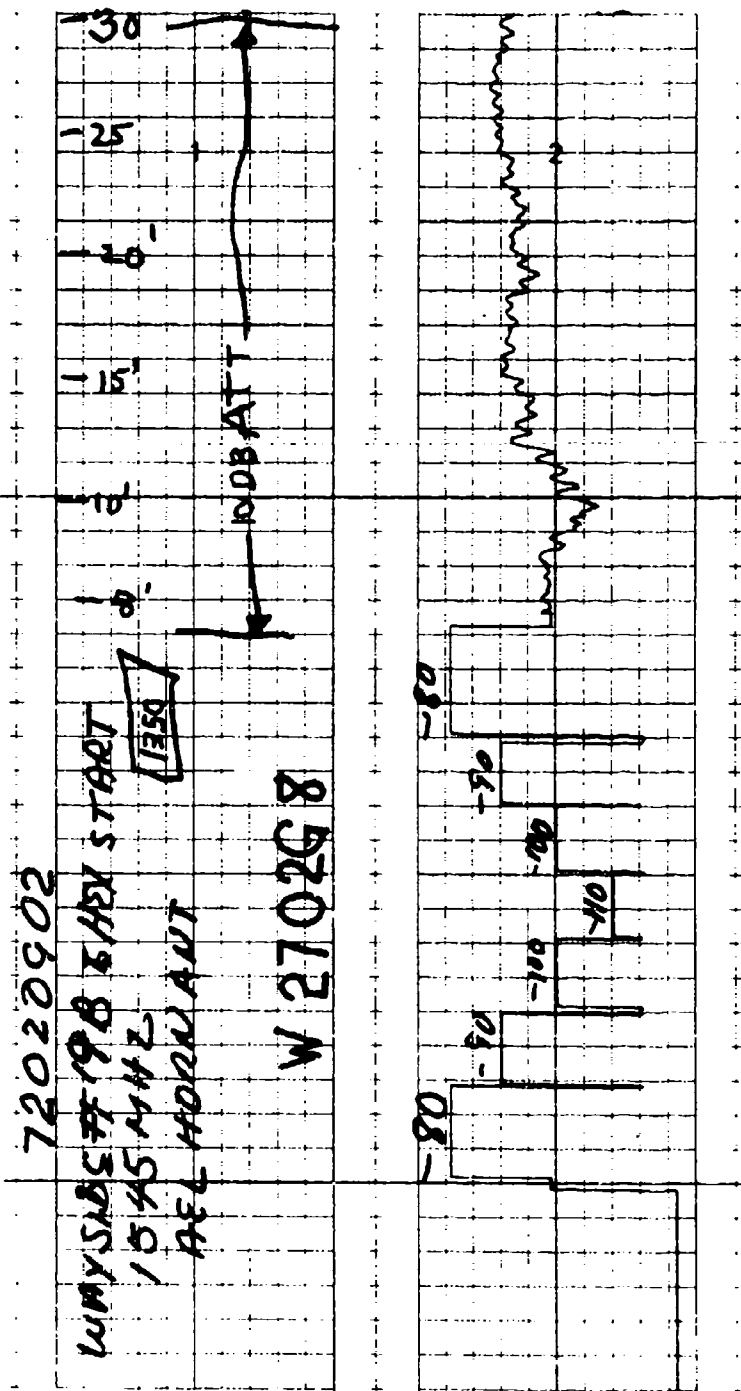


Figure 23. Propagation Path Loss Strip Chart

# PROPAGATION PATH LOSS

DATE: 9 FEBRUARY 72 TEST RUN S/N: 720209-02

PATH: WAYSIDE SITE No. 198 TO ECOM I/EXAGON

OPER. FREQ.: 1545 MHZ

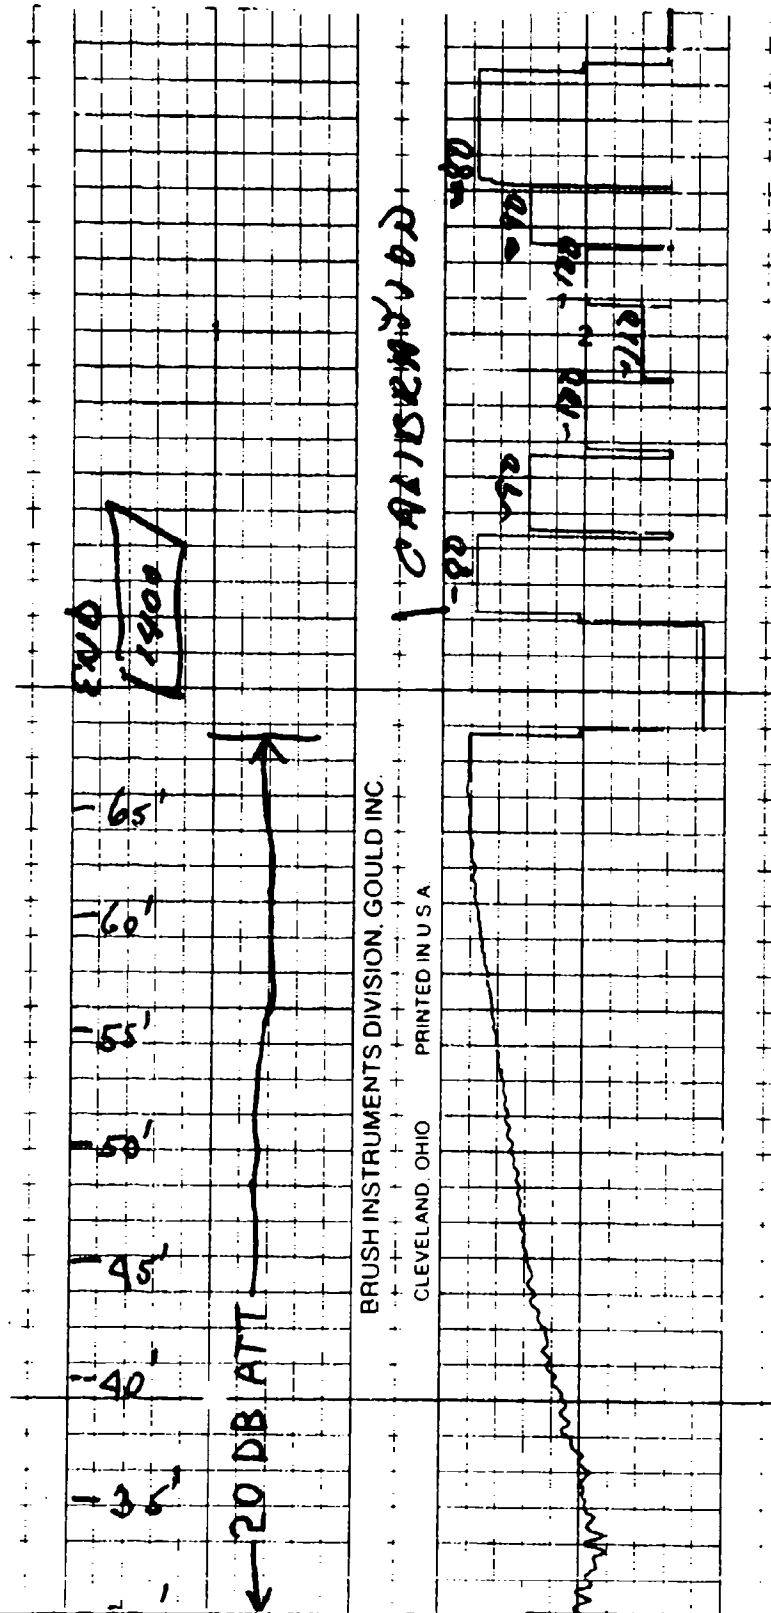


Figure 24. Propagation Path Loss Strip Chart

TEST DATA SHEET													
OPER. FREQ.		154.5 MHz		DATE: 9 FEBRUARY 72		START: 1328 HRS.		FT.					
SITE		LOCATION		REC. SITE ANT. HT.		ANT. GAIN (dB)		EQUIV. SYS. PWR. (ESP)					
TRANSMITTER		WAYSIDE 190		TYPE ANTENNA		CABLE LOSSES (dB)		XMT. PWR. 44					
RECEIVER		ECOM HEX.		HORN		14.4		+ ANT. GAINS 14.7					
TOTAL ANT. GAIN (XMT + REC.)		14.4 + 0.3 = 14.7 dB		RCVR. ANT. HEIGHT ABOVE SEA LEVEL		140 FT.		- CABLE LOSSES 6.9					
TOTAL CABLE LOSS (XMT + REC.)		5.7 + 1.2 = 6.9 dB		RCVR. ANT. HEIGHT ABOVE SEA LEVEL		140 FT.		- ESP = 51.8 USE $\sqrt{2}$					
XMT. ANT. HT. ABOVE GND (FT)		RCVD. PWR. (dBm)		TEST		PATH LOSS (dB) = (ESP) - (RCVD. PWR.)		AVG. PATH. LOSS (dB)		NO. OF SAMP		REMARKS	
8	97	720209-01		720209-02		140		144.5		2			
10	96					141		146.0		2			
15	82					134		134.0		2			
20	85					137		136.0		2			
25	80					132		132.0		2			
30	81					133		133.0		2			
35	81					133		133.0		2			
40	76					128		127.7		2			
45	72					124		123.0		2			
50	68					120		120.0		2			
55	65					117		117.0		2			
60	62					114		114.0		1		END 720209-01 - 1335	
65	60					112		112.0		1		START 720209-02 - 1350	
												END 720209-02 - 1400	
												MEAN READING OF STRIP CHART RECORDINGS	

Figure 25. Typical Test Data Sheet

PROPAGATION PATH LOSS  
DATE: 9 FEBRUARY 72 TEST RUN S/N: 720209-01-02  
PATH: WAYSIDE SITE No. 19B TO ECOM HEXAGON

OPER. FREQ.: 1545 MHz

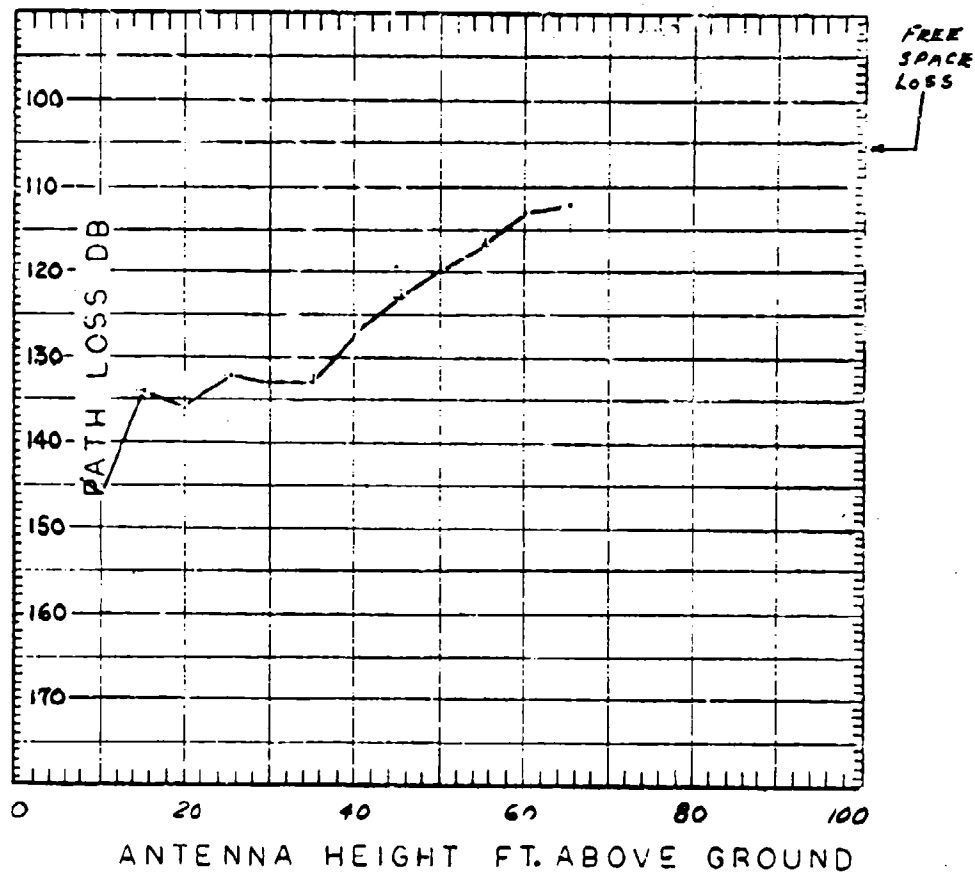


Figure 26. Propagation Path Loss Graph

## 8. TEST RESULTS

This paragraph contains the reduced data from the tests (refer to the Appendix). The raw data is not included in this report since it would unnecessarily add to the bulk. The results of each set of tests are shown in tabulated and graphical formats. The explanation of how this reduced data was obtained is given in the "Sample Data," paragraph 7.

Table V lists the distribution and cumulative distribution of the maximum path losses obtained during the 1972 tests. Only three of the four frequencies used in the test are shown since there was insufficient data at the highest frequency. This data was obtained over the various paths between the receiver at the Hexagon Building, Fort Monmouth, and the transmitting stations, none of which were more than 10 miles from the receiver. It should be noted here that the maximum path loss did not always occur at the lowest antenna height. The table shows the number of tests in which particular maximum losses were observed, the cumulative total as the losses get larger and larger, and the percentage of the total number of observations that these cumulative totals represent. This data is plotted on Figures 27 and 28.

Figure 27 shows the distribution of the maximum path losses. It can be seen that as the frequency is increased, the path losses increase. The cumulative distribution plot, Figure 28, shows the percentage of path loss which does not exceed a given loss, as a function of antenna height and frequency. For example, at 1,545 MHz, 96 percent of the transmissions had a path loss of 151 dB or less, regardless of antenna height, obstructions, atmospheric conditions, etc. (without our 10-mile test radius of course).

The graphs on the following pages are combinations of various plots selected from the reduced data in the Appendix. These graphs were prepared to allow comparative analysis of typical test runs and contain such combinations as different days and seasons at the same location and the same frequency, different frequencies at the same location, different antennas at the same location and same frequency, and different polarizations over the same path under identical test conditions.

Table V. Path Loss - 1972 Low Points

1545				371.4				229.5			
dB	#	Cum	Z	dB	#	Cum	Z	dB	#	Cum	Z
124	3	3	12	109	1	1	8	105	1	1	8
132	1	4	15	122	1	2	15	114	1	2	17
134	1	5	19	123	2	4	31	117	1	3	25
137	2	7	27	124	1	5	39	120	1	4	33
140	1	8	31	126	1	6	46	122	1	5	42
141	1	9	35	127	2	8	62	123	1	6	50
142	3	12	46	129	1	9	69	125	3	9	75
143	1	13	50	130	1	10	77	127	1	10	83
144	3	16	62	132	2	12	92	129	11	11	92
146	1	17	65	133	1	13	100	134	1	12	100
147	3	20	77								
148	2	22	85								
149	1	23	89								
150	1	24	92								
151	1	25	96								
156	1	26	100								



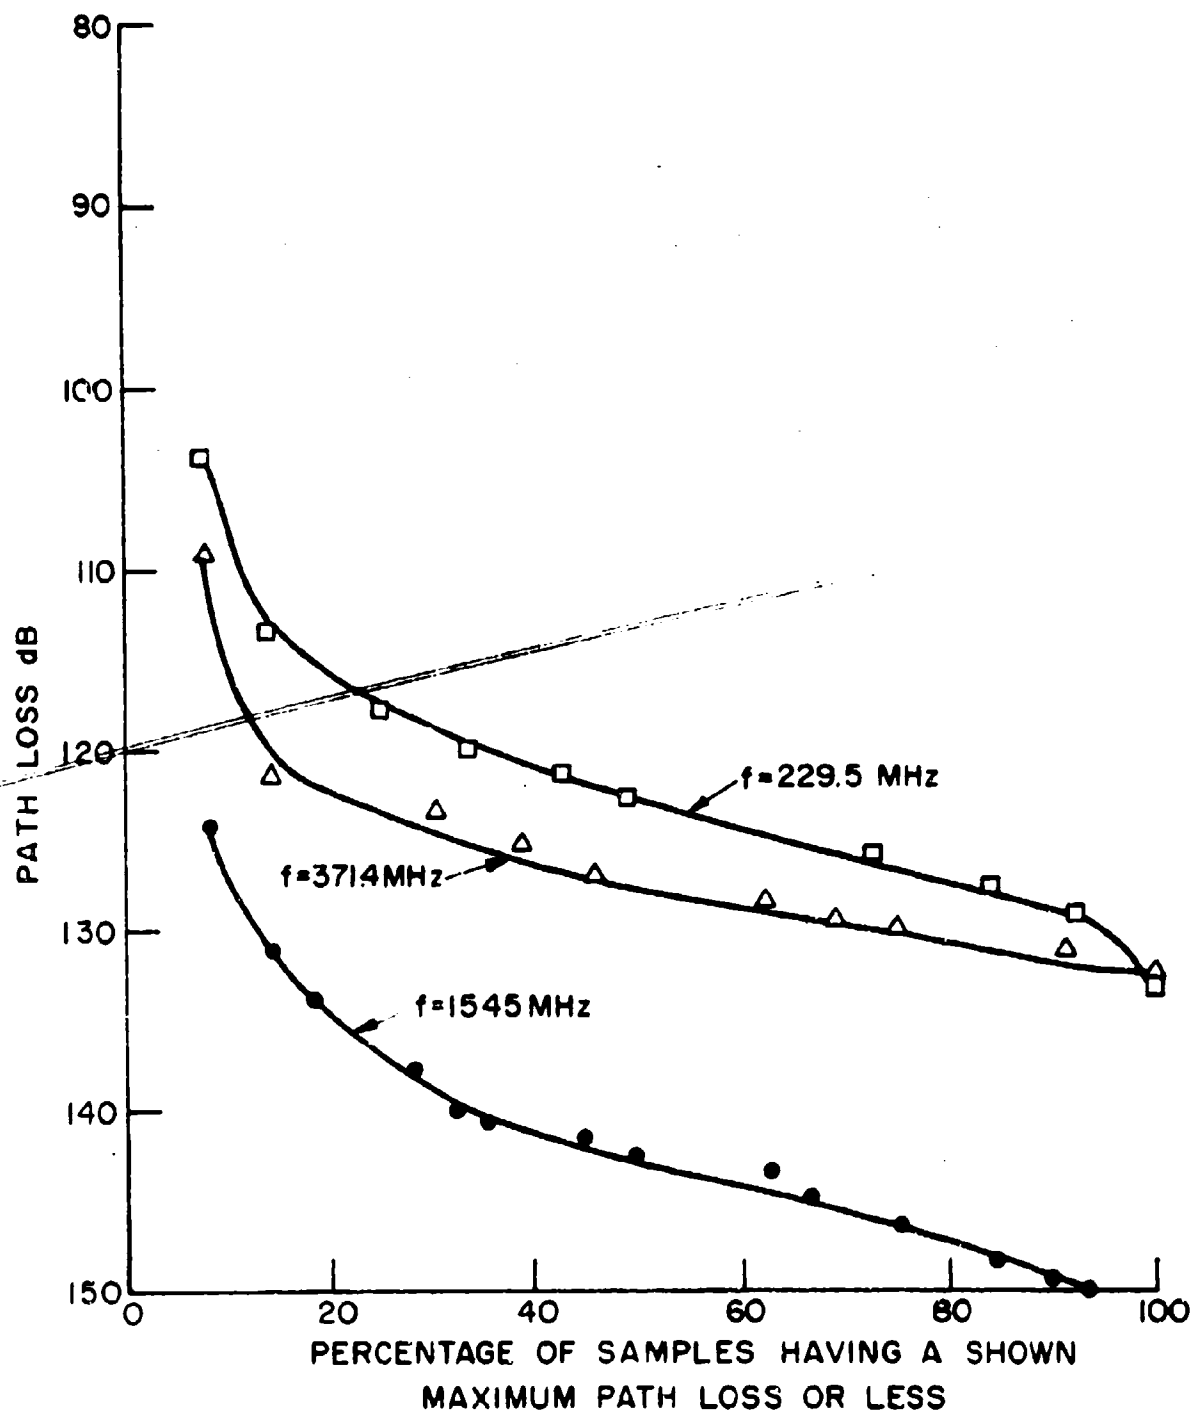


Figure 27. Propagation Path Loss 1,545 MHz

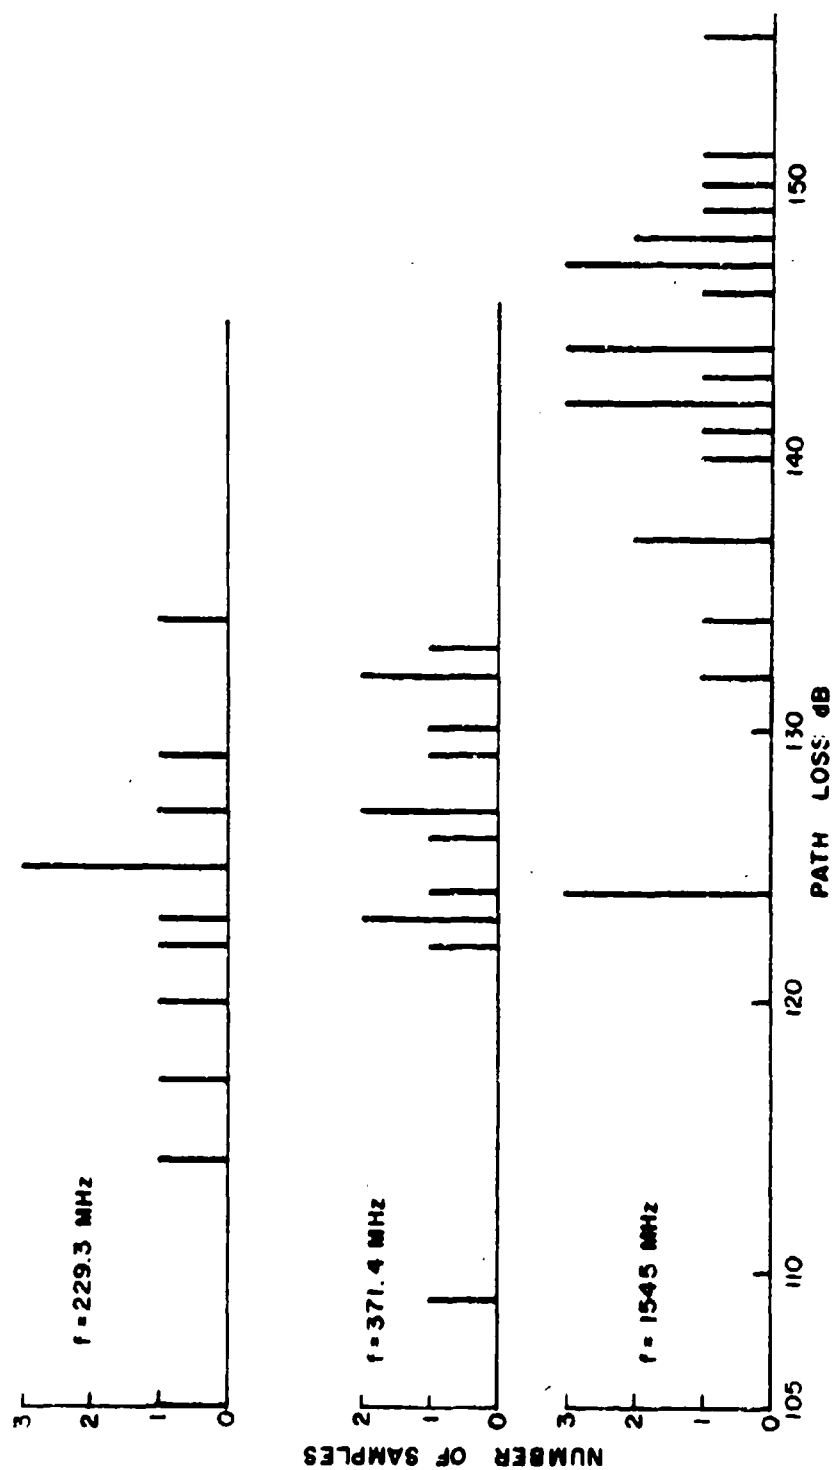


Figure 28. Propagation Path Loss 371.4 MHz

a. 229.5 MHz Comparison Plots (Figures 29 through 32)

Wayside Site No. 9 to ECOM Hexagon 1.61 miles  
Oper. Freq. 229.5 MHz, Ant. Type: AT-197

See description of Site 9 for details - Beyond line-of-sight and blocked by trees without leaves except for pines.

18 Feb. 1972 -----

14 Mar. 1972 -----

These results of the measurements do not differ by more than 3 dB and there is reasonably good correlation.

The path loss is about 27 dB greater than the free space path loss at antenna heights between 10 to 30 feet.

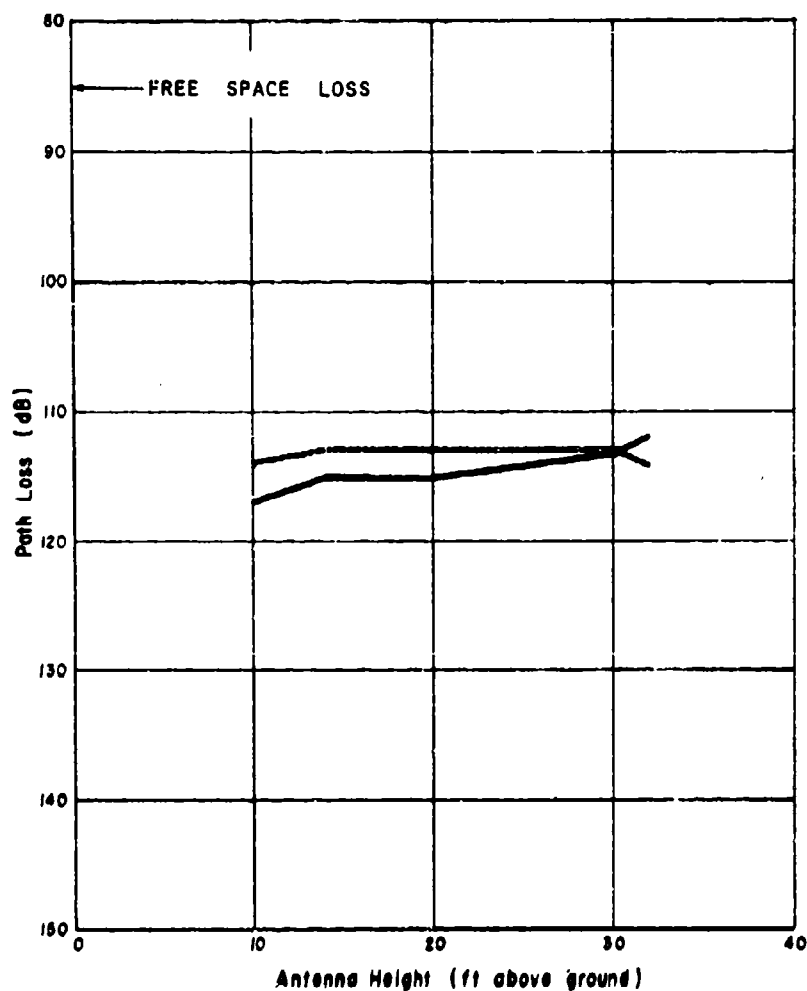


Figure 29. Propagation Path Loss (Site 9 to Hexagon, Frequency 229.5 MHz, Antenna AT-197)

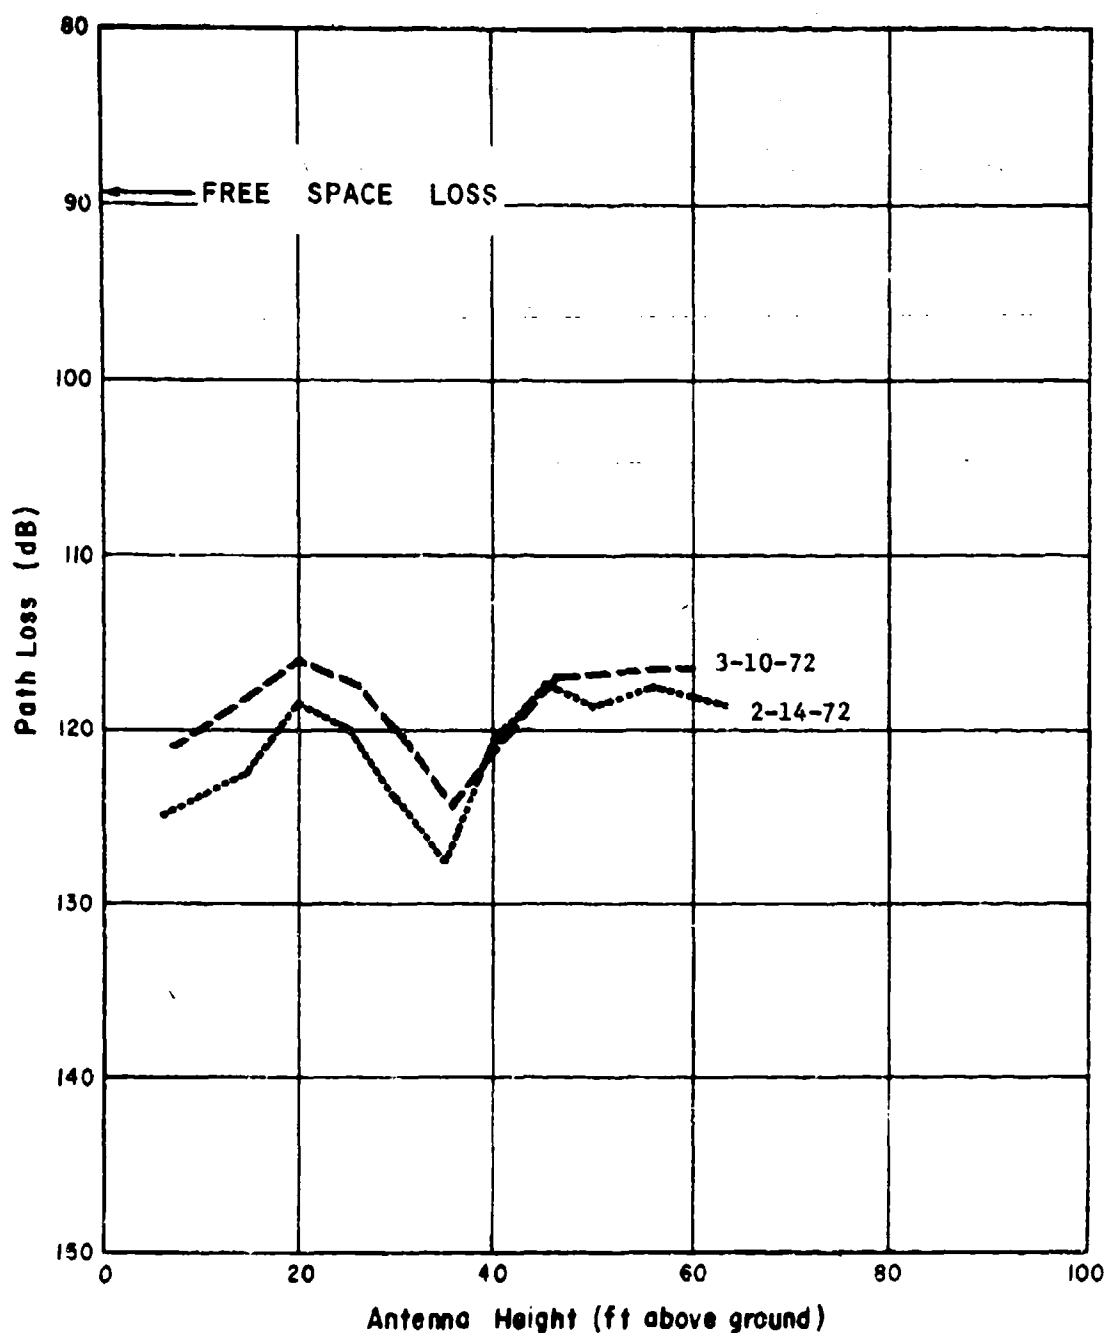


Figure 30. Propagation Path Loss (Site 19B to Hexagon, Frequency 229.5 MHz, Antenna T-29 (Horizontal))

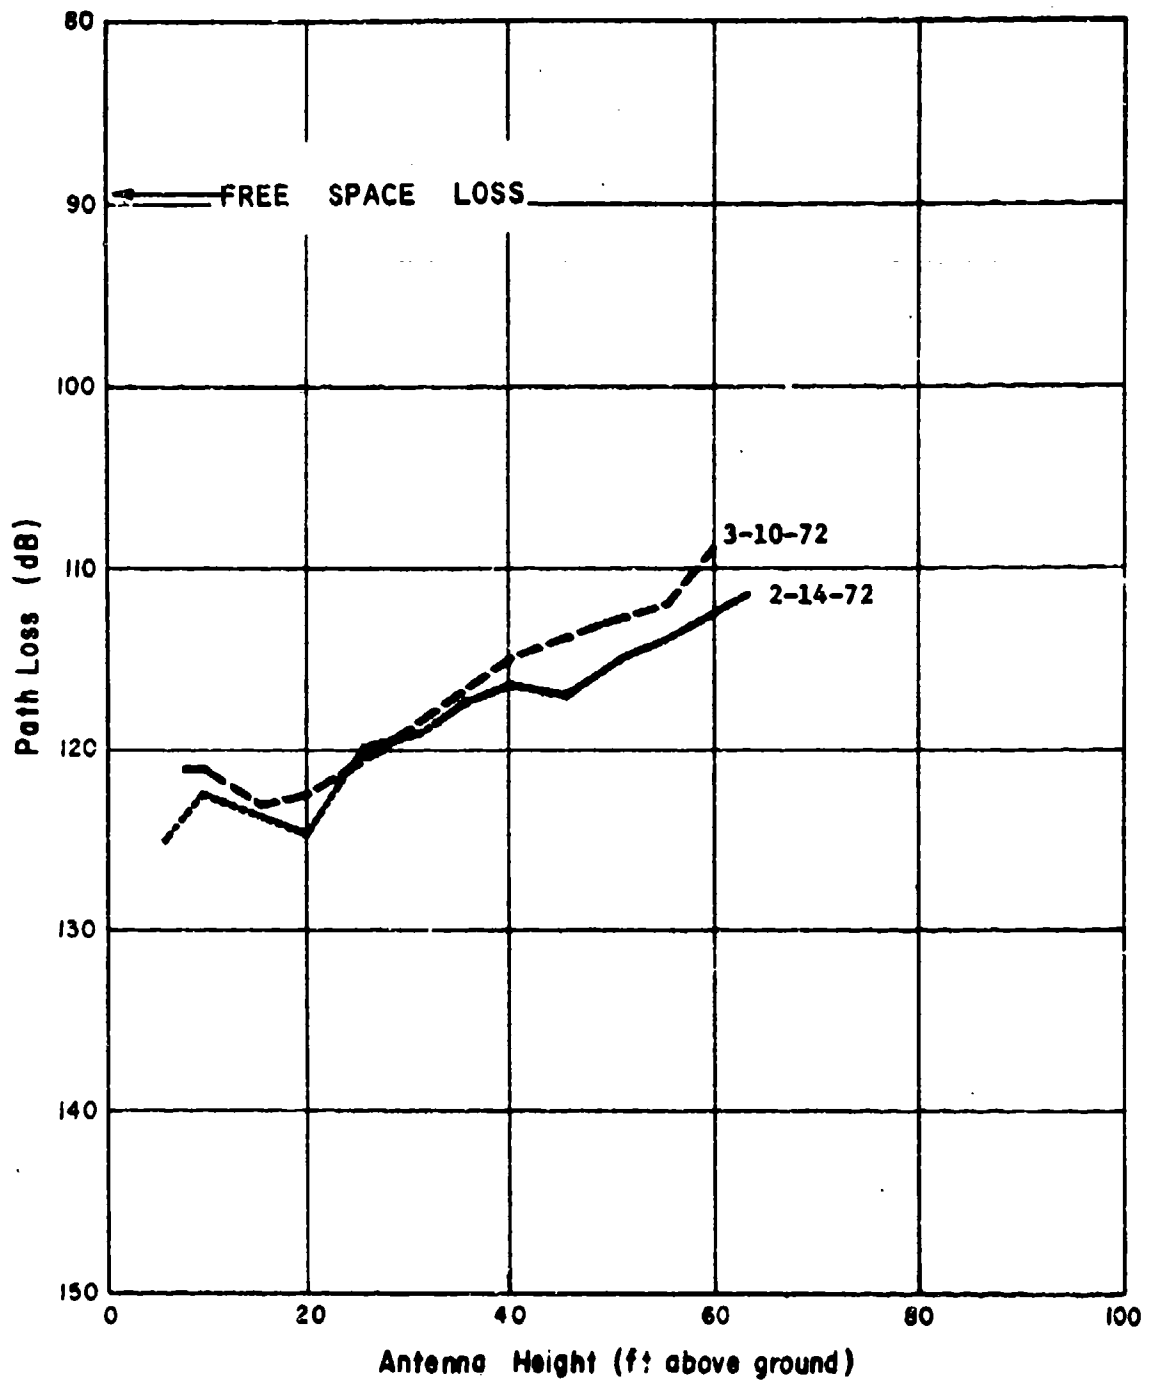


Figure 31. Propagation Path Loss (Site 19B to Hexagon, Frequency 229.5 MHz, Antenna T29 (Vertical))

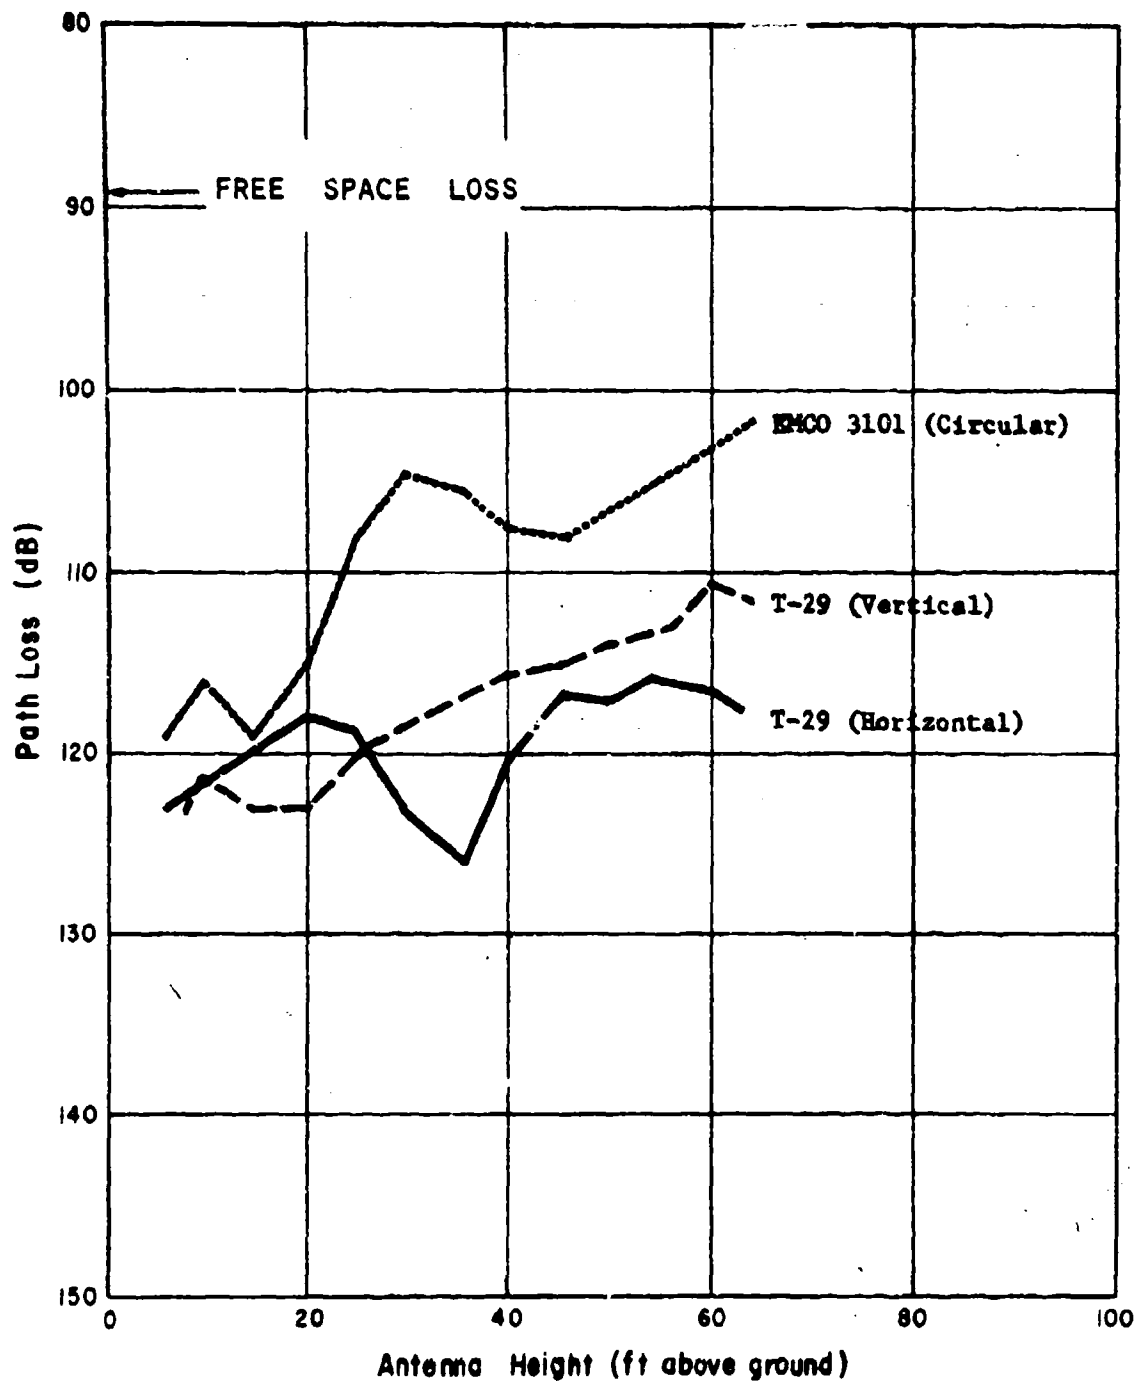


Figure 32. Propagation Path Loss (Site 19B to Hexagon, Frequency 229.5 MHz Antenna) (See Graph, Figure 3)

b. 371.4 MHz Comparison Plots (Figures 33 through 41)

(1) Path AKL MCA No. 5 to ECOM Hexagon.

Oper. Freq. 371.4 MHz Ant. Type - AT-197

Oct. 1971 - ——— Leaves still on trees.  
 27 Jan. 1972 - - - - - Dry ground, no leaves on trees, tractors moving about 600 feet in front of transmitting antenna.  
 28 Jan. 1972 - - - - - 2-1/2 inches of snow on ground with light snow falling - wind 1 to 2 knots gusting to 4 - transmitting antenna had a light coat of ice - no tractor activity.

At this site, the transmitter is beyond the line of sight and at a distance of 7.6 miles from the Hexagon. The maximum data spread of 3 dB occurs at an antenna height of 40 feet. At 60 feet antenna height, the data spread is 4 dB.

The above data spreads are not considered excessive.

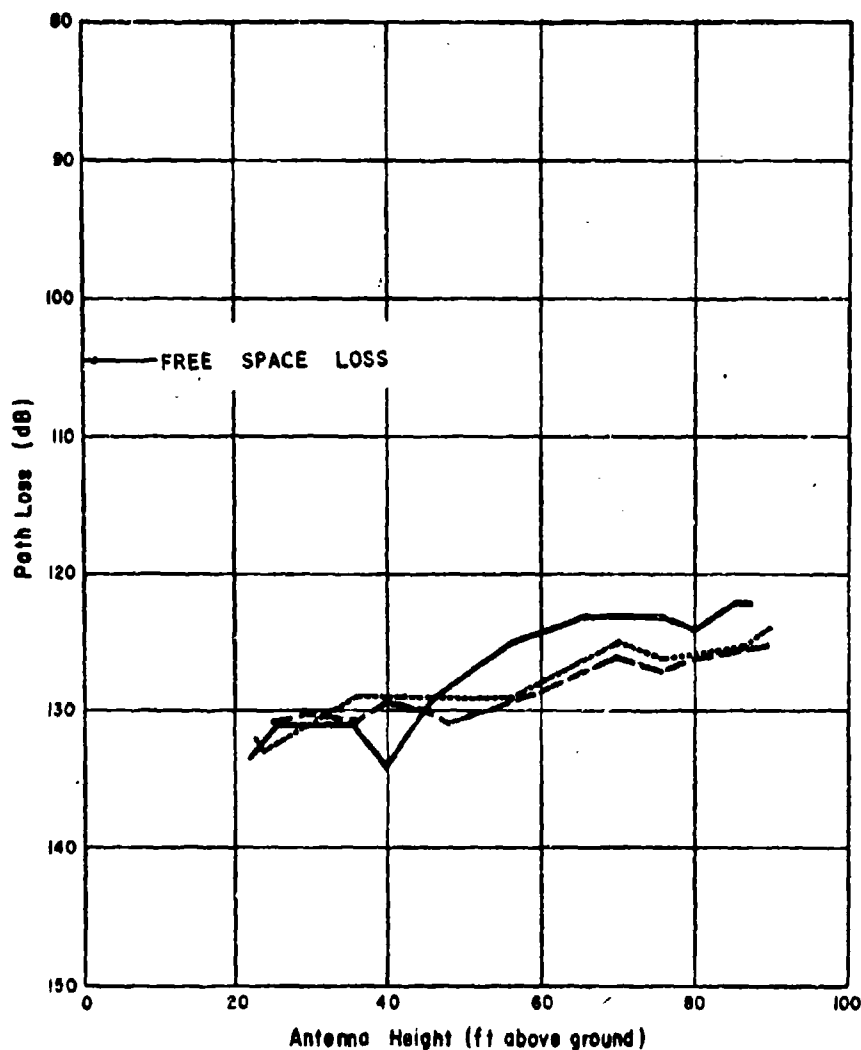


Figure 33. Propagation Path Loss (Site 5 to Hexagon, Frequency 371.4 MHz, Antenna AT-197)

(2) Path, Wayside Site No. 9 to ECOM Hexagon - 1.61 miles.

Oper. Freq. 371.4 MHz Ant. Type: AT-197

See description of site No. 9 for details - Beyond line-of-sight and blocked by pine trees and trees without leaves.

9 Nov. 71 - ——— ——— ———

18 Feb. 72 - - - - -

14 Mar. 72 - ——— Rain and sleet on this day.

On 18 February and 14 March, between 17 and 32 feet of antenna height the difference in path loss does not differ by more than 2 dB. At 32 feet, the difference is 3 dB. Below 17 feet, the difference increases to as much as 9 dB at 10 feet of antenna height. At 30-foot antenna height, the path loss is about 23 dB below the free space loss.

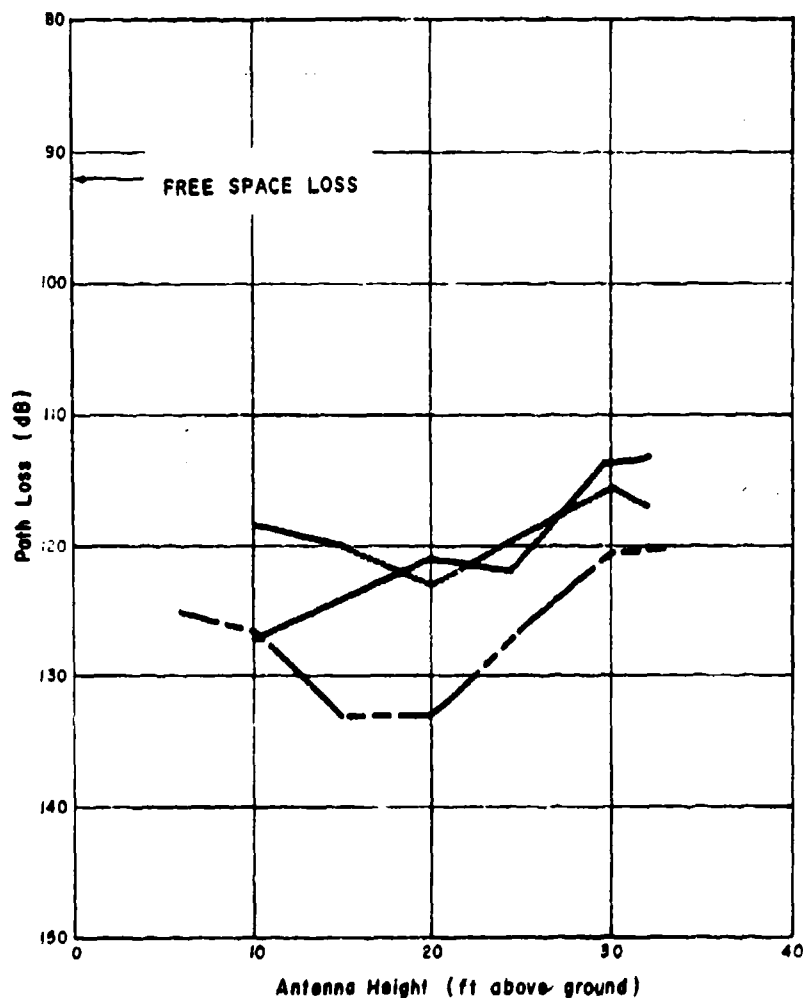


Figure 34. Propagation Path Loss (Site 9 to Hexagon, Frequency 371.4 MHz, Antenna AT-197)



(3) Path: Wayside Site No. 19 to ECOM Hexagon - 1.68 miles.

Oper. Freq. 371.4 MHz Ant. Type: AT-197

15 Nov. 1971 -	-----	} On the average, these data subject to greater path loss at heights of 20 to 30 feet.
16 Nov. 1971 -	-----	
19 Nov. 1971 -	-----	
7 Feb. 1972 -	-----	} These data more self-consistent at all heights from 10 to 32 feet.
10 Mar. 1972 -	-----	
10 Mar. 1972 -	-----	

Within range of heights from 7 to 33 feet, the data indicated a path loss variation of 22 dB. For the 7 February and 10 March data, the path loss variation was reduced to 16 dB.

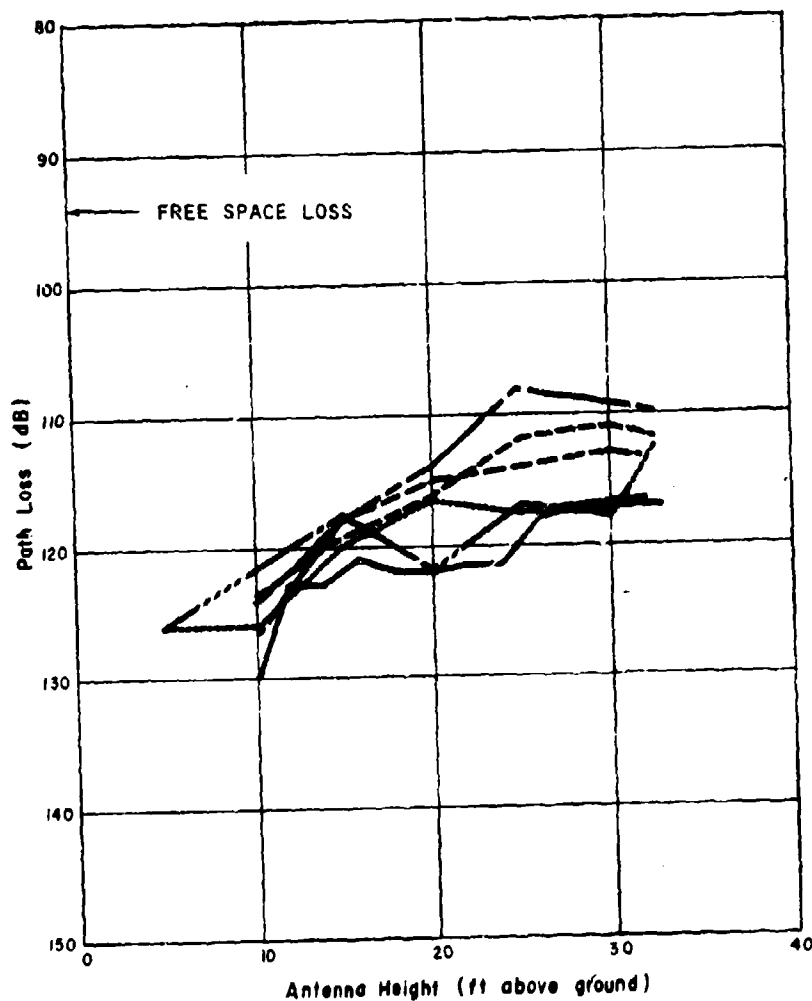


Figure 35. Propagation Path Loss (Site 19 to Hexagon, Frequency 371.4 MHz, Antenna A1-197)

(4) Path: Wardside Site No. 19B to ECOM Hexagon.

Oper. Freq. 371.4 MHz

Three additional plots are included to provide data for the composite plot for comparing the performance when signals are transmitted in horizontal, vertical, and circular polarisation modes.

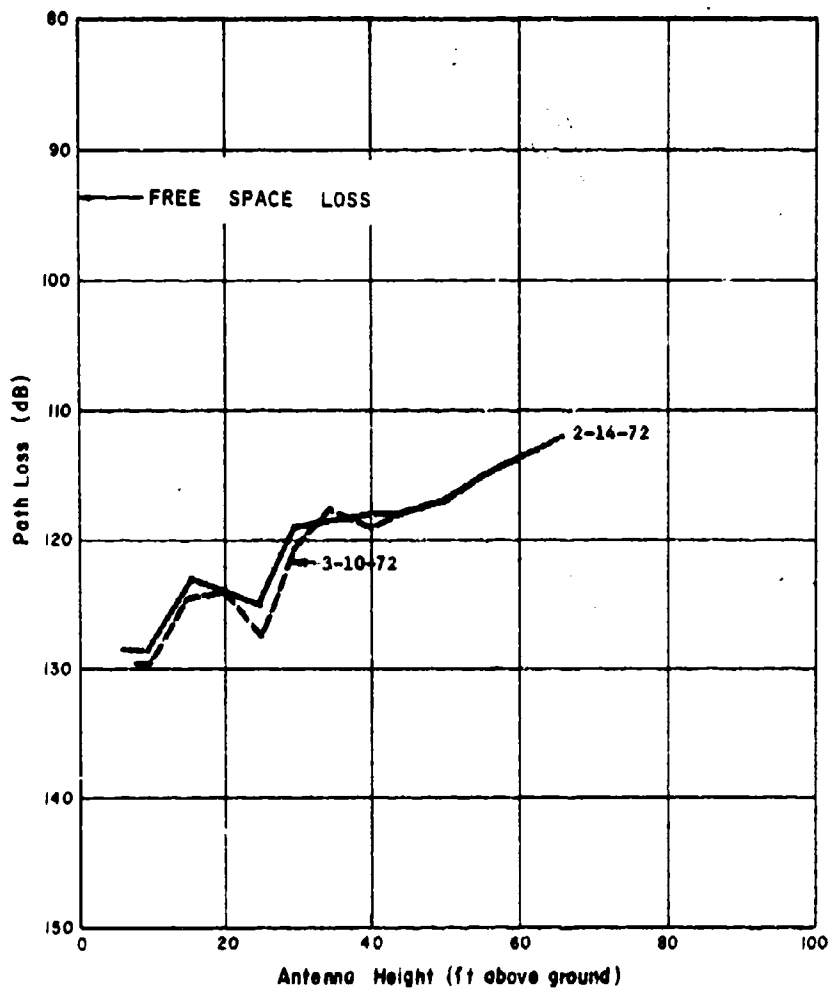


Figure 36. Propagation Path Loss (Site 19B to Hexagon, Frequency 371.4 MHz, Antenna T-29 (Horizontal))

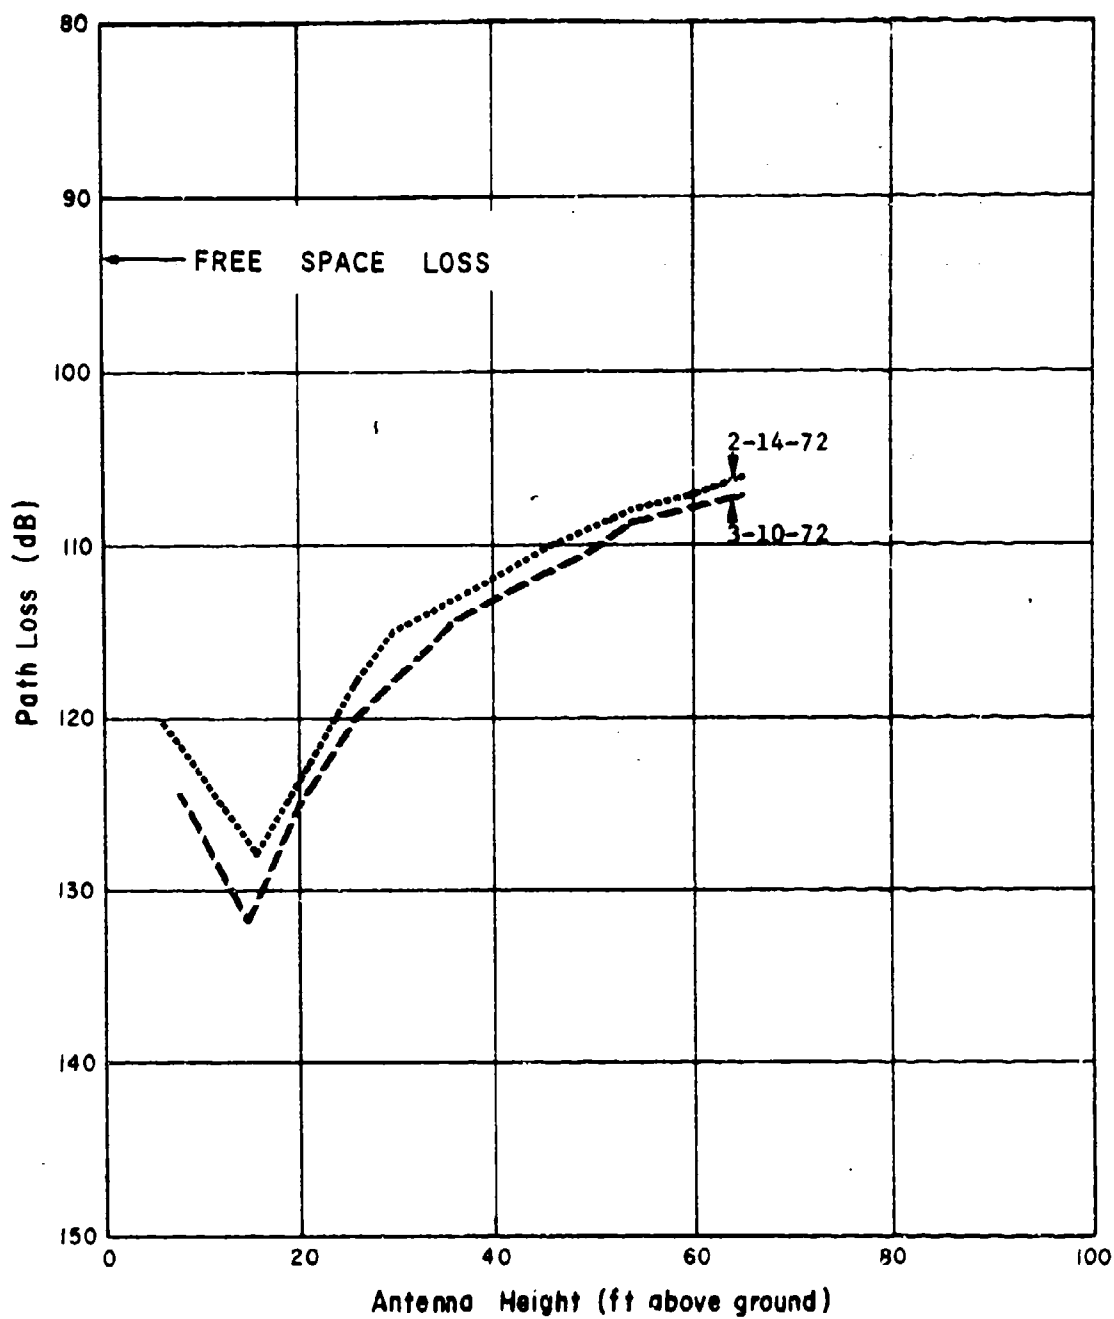


Figure 37. Propagation Path Loss (Site 19B to Hexagon, Frequency 371.4 MHz, Antenna T-29 (Vertical))

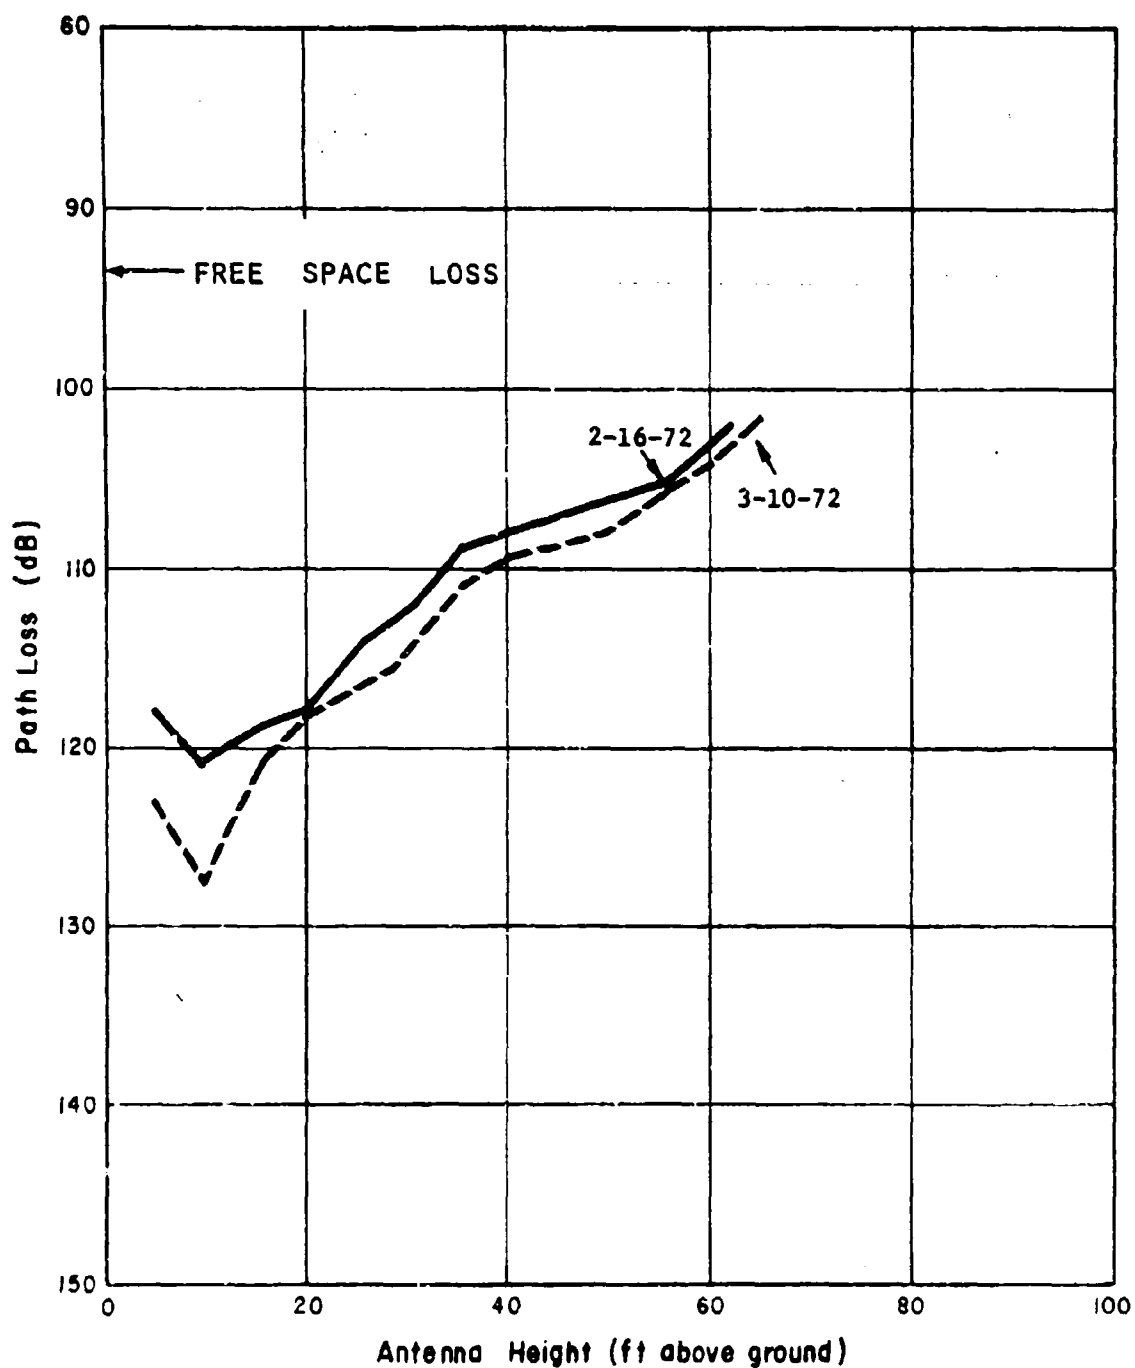


Figure 38. Propagation Path Loss (Site 19B to Hexagon, Frequency 371.4 MHz, Antenna EMCO 3101 (Circular))

(3) Path Wayside Site No. 198 to the Hexagon - 1.86 miles.

Oper. Freq. 371.4 MHz Ant. Type - See Graph

At this frequency, the circularly polarized EMCO Model 3102 log spiral antenna was compared with the linearly polarized T-29 log periodic antenna in both horizontal and vertical polarizations. On this path, the path loss was less by 2 to 12 dB at all transmitting antenna heights from 3 to 62 feet using the circularly polarized antenna as compared to the T-29 in either polarization. Between 20 and 62 feet, the depolarization effect in horizontal polarization causes 0 to 8 dB greater loss than in the vertically polarized case. In either case, the received signal is less than when a circularly polarized antenna is used. This indicates the possible advantage of employing circular polarization over tree covered terrain.

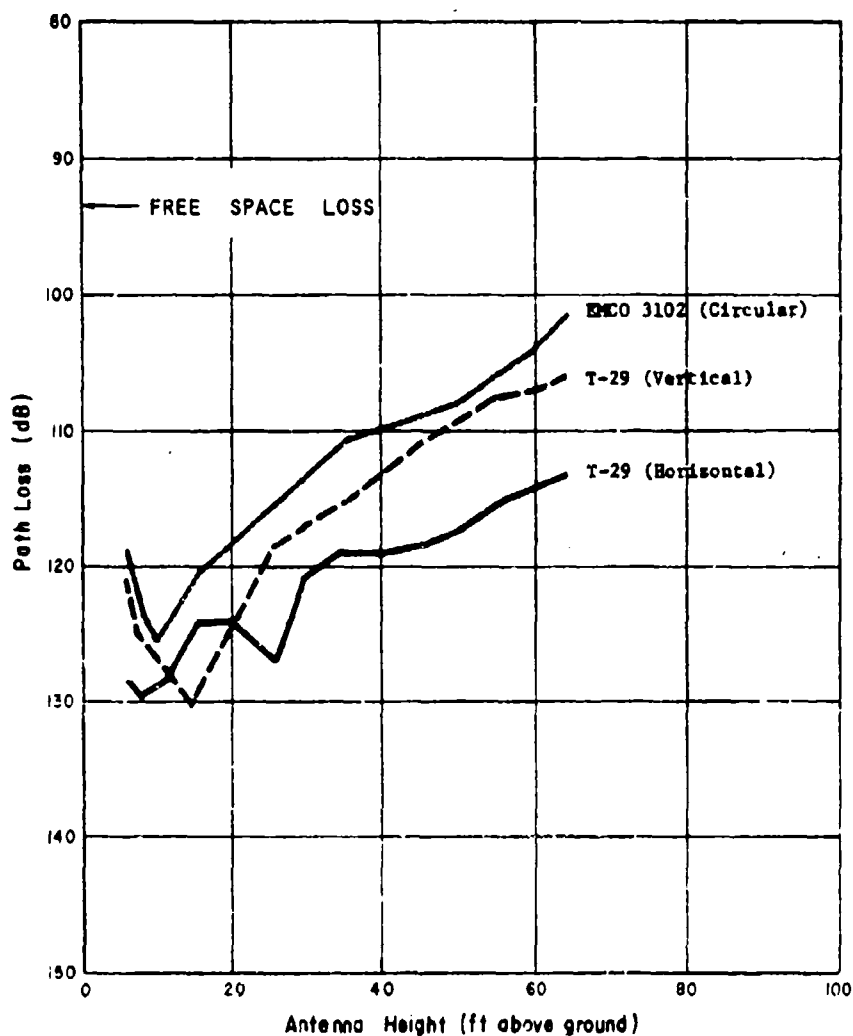


Figure 39. Propagation Path Loss (Site 198 to Hexagon, Frequency 371.4 MHz, Antenna (See Graph))

(6) Path: Wayside Site No. 19B to ECOM Hexagon.

Oper. Freq: 371.4 MHz Ant. Type: AT-197 - Omni-directional, Vertically Polarized

Although not included with the composite comparison of the effects of transmitting circularly, vertically or horizontally polarized signals on the vertically polarized receiving antenna, the comparative effect on path loss with the AT-197 is included in this discussion of the test data for 9 February and 10 March 1972.

As the height was changed from 4 to 63 feet, the path loss measurements for these two dates differed at heights greater than 20 feet by 2 to 4 dB. The maximum difference of 7 dB occurred at a height of 14 feet.

The range of path loss is between 11 and 33 dB greater than the free space path loss. This range of values is nearly the same as with the use of the T-29 in vertical polarization for the same operating conditions at the same transmitting to receiving transmission path.

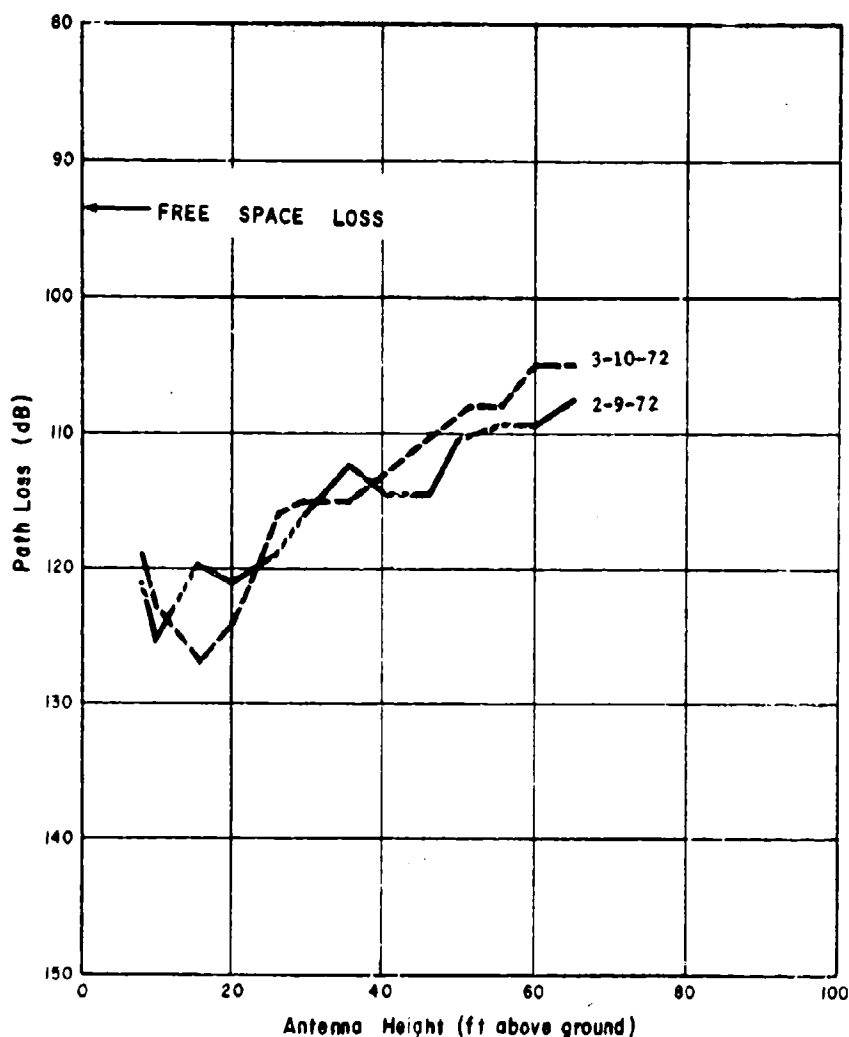


Figure 40. Propagation Path Loss (Site 19B to Hexagon, Frequency 371.4 MHz, Antenna AT-197)

(7) Highlands Site No. 21 to ECOM Hexagon

See Frequencies on Graph. Antenna Type - AT-197 - Discone

This path is within line of sight, 8.1 miles to Hexagon.

Objects in vicinity of the transmitting antenna:

Power line is in front about 50 feet away.

100-foot steel tower 33 feet away is to left and partially behind the antenna.

Storm fence and building is located adjacent to 100-foot steel tower.

Both measurements made 1 February 1972.

———— - 229.5 MHz

----- - 371.4 MHz

The ground is damp from melting snow.

Path loss variations are possibly subject to the influence of nearby objects.

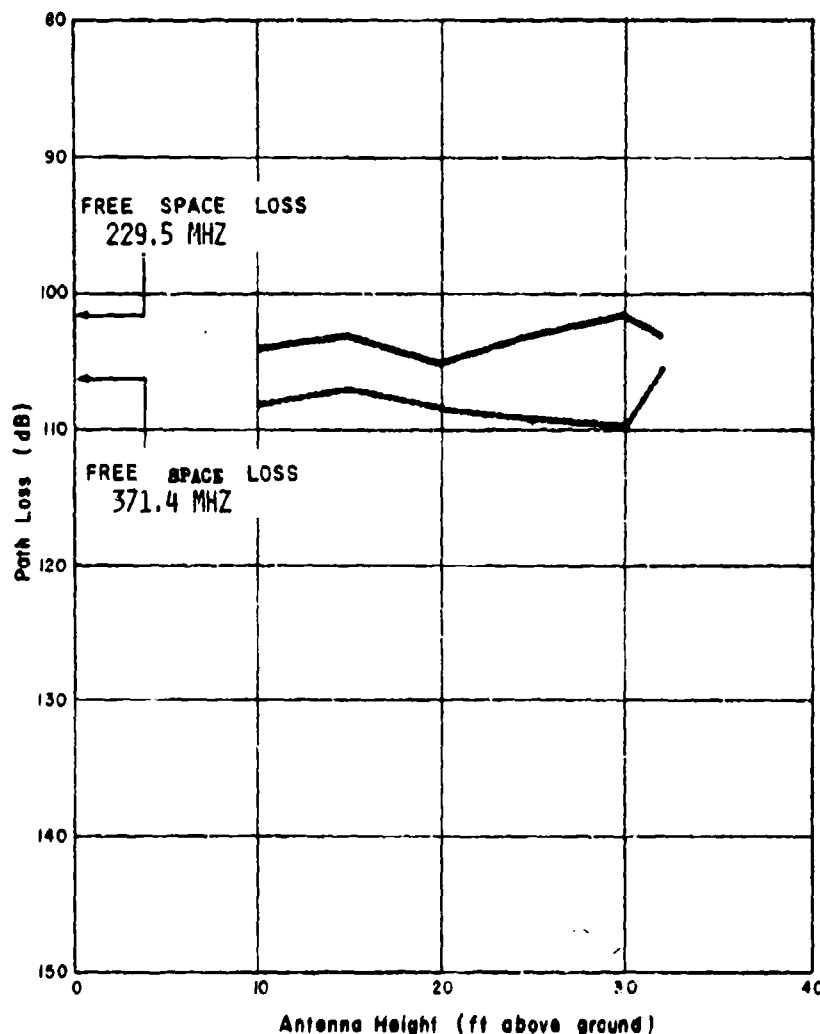


Figure 41. Propagation Path Loss (Site 21 to Hexagon, Frequency N/A, Antenna AT-197) 1 February 1972

c. 1,545-MHz Comparison Plots (Figures 42 through 51)

(1) Path AEL MCA Site No. 5 to ECOM Hexagon.

Oper. Freq. 1,545 MHz Ant. Type - AEL Horn

13 Oct. 71 - \_\_\_\_\_  
 19 Oct. 71 - - - - -  
 24 Jan. 72 - - - - - Tractors operating in line of sight about 600 feet away.  
 25 Jan. 72 - - - - - Light rain falling.  
 26 Jan. 72 - ..... Wind from 5 knots gusting to 20 knots.  
 27 Jan. 72 - ..... Equipment working in area.  
 28 Jan. 72 - - - - - Snow on ground, no snow falling, wind 1 to 2 knots.

There is a self consistency in these plots except for small deviations. Data spread varies from 3 dB at 60-foot altitude to about 6 dB at 38-foot altitude.

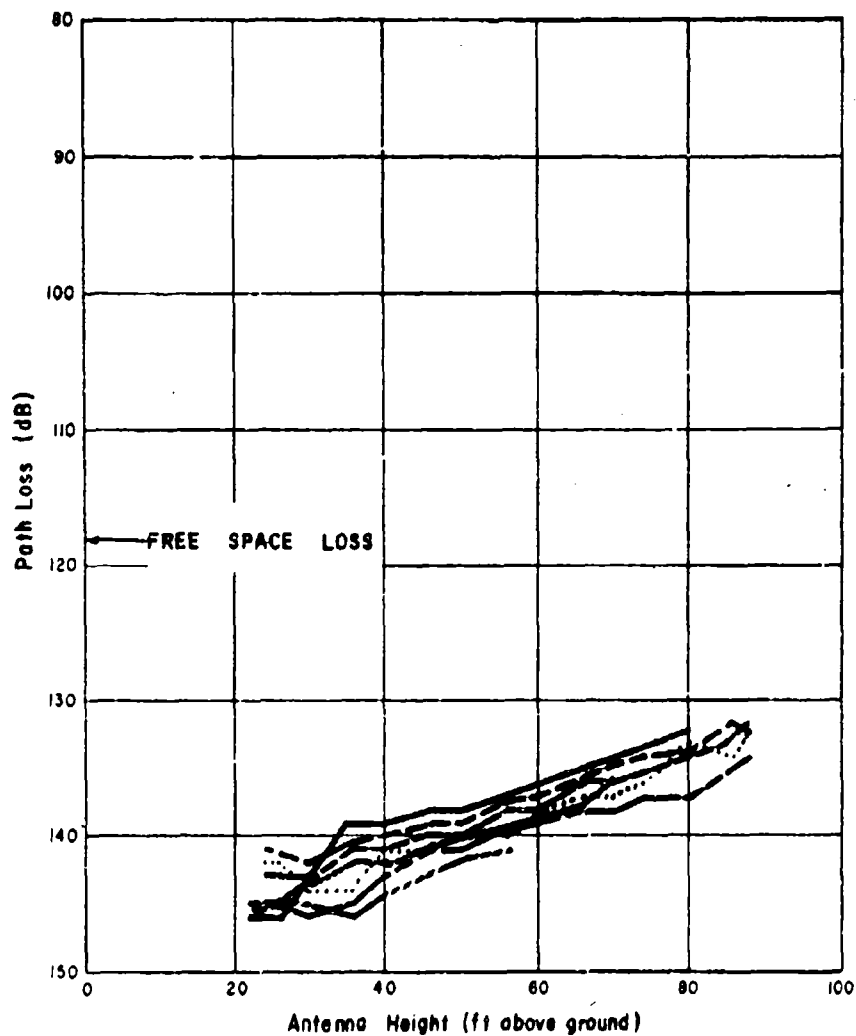


Figure 42. Propagation Path Loss (Site 5 to Hexagon, Frequency 1,545 MHz, Antenna - AEL Horn)



(2) Path Wayside Site No. 9 to ROOM Hexagon - 1.61 miles.

Oper. Freq. 1,545 MHz Ant. Type AEL Horn

See Description of Site No. 9 for details. Beyond line-of-sight and blocked by trees without leaves except for pines.

9 Nov. 1971 - - - - -

17 Feb. 1972 - - - - -

18 Feb. 1972 - - - - -

14 Mar. 1973 - - - - -

These three sets of measurements are self-consistent.

Rain and sleet on 14 March.

The three sets of measurements taken in 1972 correlate reasonably well.

Differences are at most 3 dB.

Path loss is approximately 29 dB greater than free space loss at an antenna height of 30 feet and the loss increases by about 17 dB as the antenna is lowered to 7 feet.

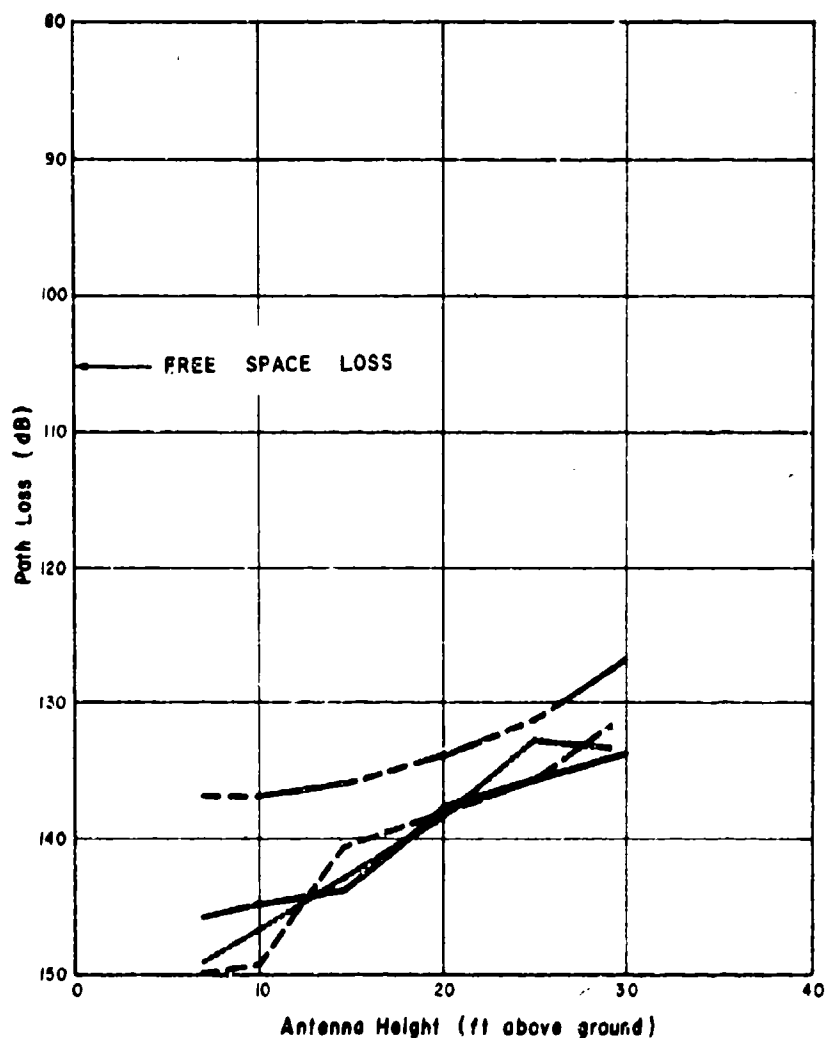


Figure 43. Propagation Path Loss (Site 9 to Hexagon, Frequency 1,545 MHz, Antenna - AEL Horn)

(3) Wayside Site No. 9 to BOOM Hexagon - 1.61 miles.

Oper. Freq. 1,545 MHz Ant. Type: Andrews Discone

See description of site 9 for details. Beyond line-of-sight and blocked by trees without leaves except for pines.

17 Feb. 72 - \_\_\_\_\_

18 Feb. 72 - - - - -

14 Mar. 72 - \_\_\_\_\_

The three test results correlate reasonably well. Differences are no more than 3 dB.

The path loss is about 27 dB greater than the free space path loss at 30-foot antenna height. Additional path loss of about 12 dB occurs as the antenna height is reduced to about 10 feet.

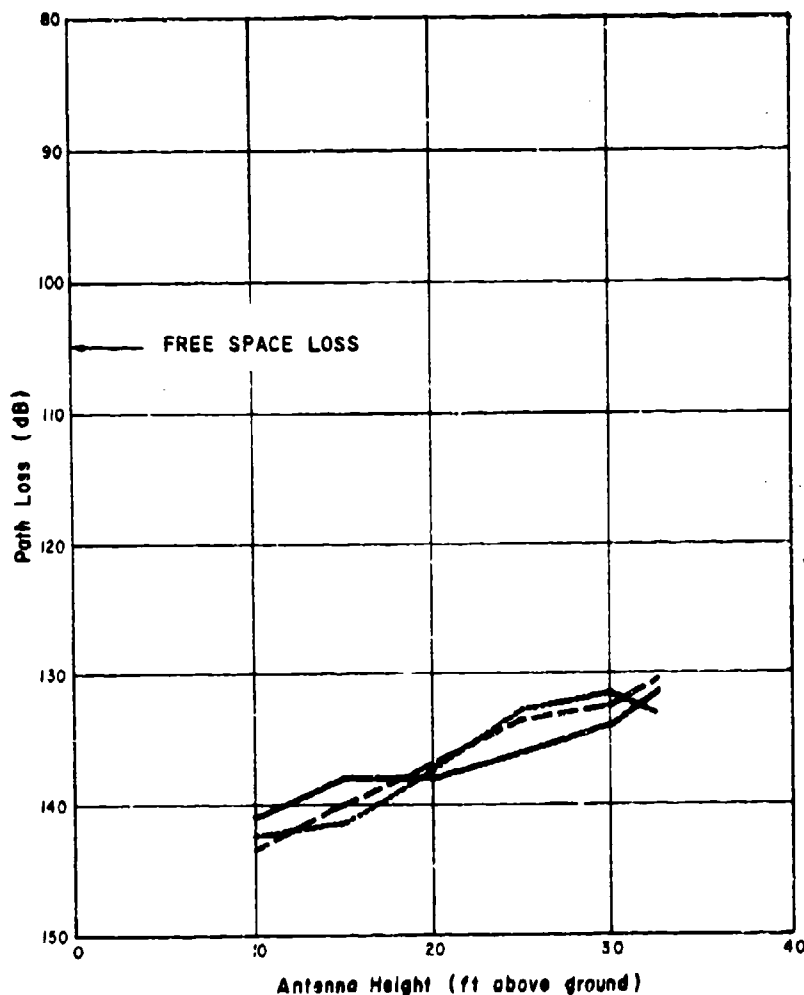


Figure 44. Propagation Path Loss (Site 9 to Hexagon, Frequency 1,545 MHz, Antenna - Andrews Discone)

(4) Path: Wavada Site No. 19 to NMM Hexagon - 1.69 miles.

Oper. Freq. 1,545 MHz Ant. Type: Andrews Discone

The propagation mode vertical polarization transmit to vertical polarization receive. The data is recorded for:

19 Nov. 1971 - \_\_\_\_\_  
 7 Feb. 1972 - - - - -  
 8 Feb. 1972 - - - - -  
 13 Mar. 1972 - - - - -

Data recorded on these 3 days more  
 self-consistent

The transmitter antenna height was varied from 10 to 32 feet. There are no known factors which can be used to explain why on 19 November 1971, there was a significant reduction in path loss in the 12- to 21-foot antenna height range.

The latter three runs differ over most of the height range by 2 to 4 dB. Above 30 feet high, the 7 February data does not retain consistency with the 8 February and 13 March data. In general, the last three data runs are not too dependent on antenna height. This differs with other data runs at 1,545 MHz which are much more dependent on transmitter antenna height. In general, the path loss over these heights is about 30 dB greater than free space path loss.

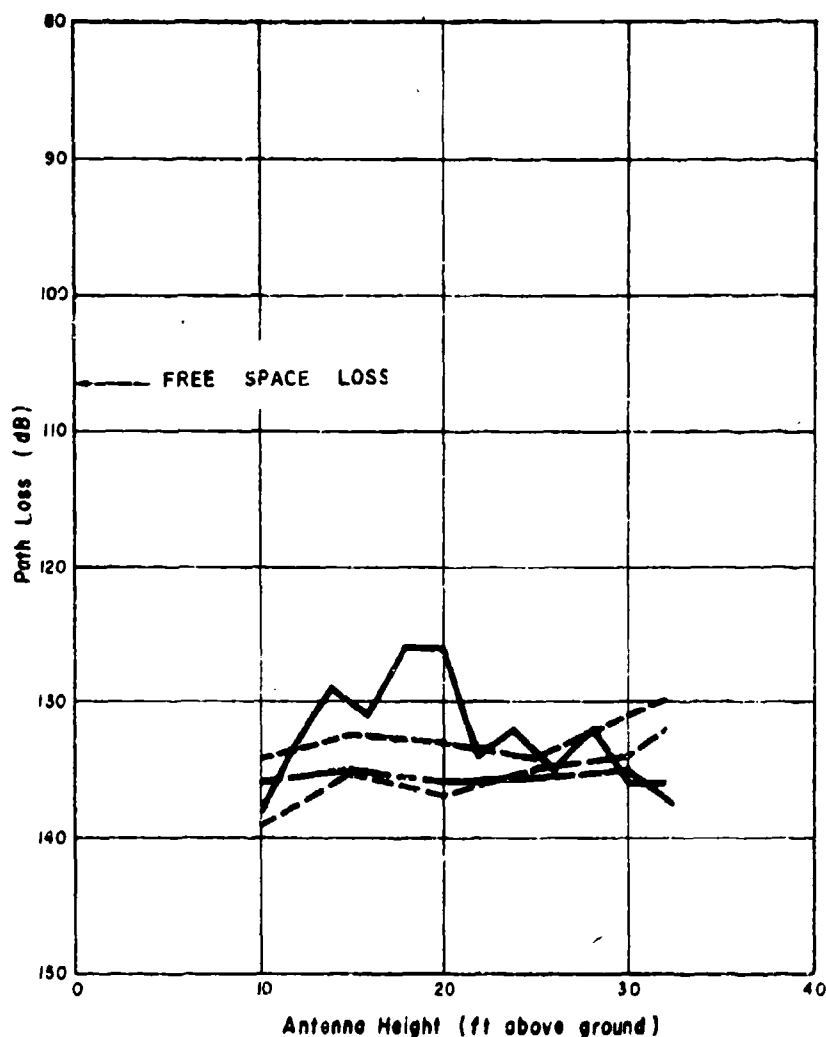


Figure 45. Propagation Path Loss (Site 19 to Hexagon, Frequency 1,545 MHz, Antenna - Andrews Discone)

(5) Path: Wayside Site No. 19 to ROOM Hexagon - 1.68 miles.

Oper. Freq. 1,345 MHz Ant. Type: AEL Horn

The antenna height was varied from 7 to 30 feet. Although the 13 November 1971 data (green) and the 8 February 1972 data (purple) were taken nearly three months apart, path losses with antenna heights between 7 and 25 feet are comparable. However, between 25 and 30 feet, the difference in path losses is as much as 9 dB. Although the leaves were mainly dead, there was a fair amount of leaf cover in November and none in February.

The 13 March 1972 data (red) were taken on a sleety, rainy day with very wet ground. The wet trees in the foreground may have added to the absorption loss and effectively increased the path loss.

In general, the path loss was about 30 dB greater than the free space loss.

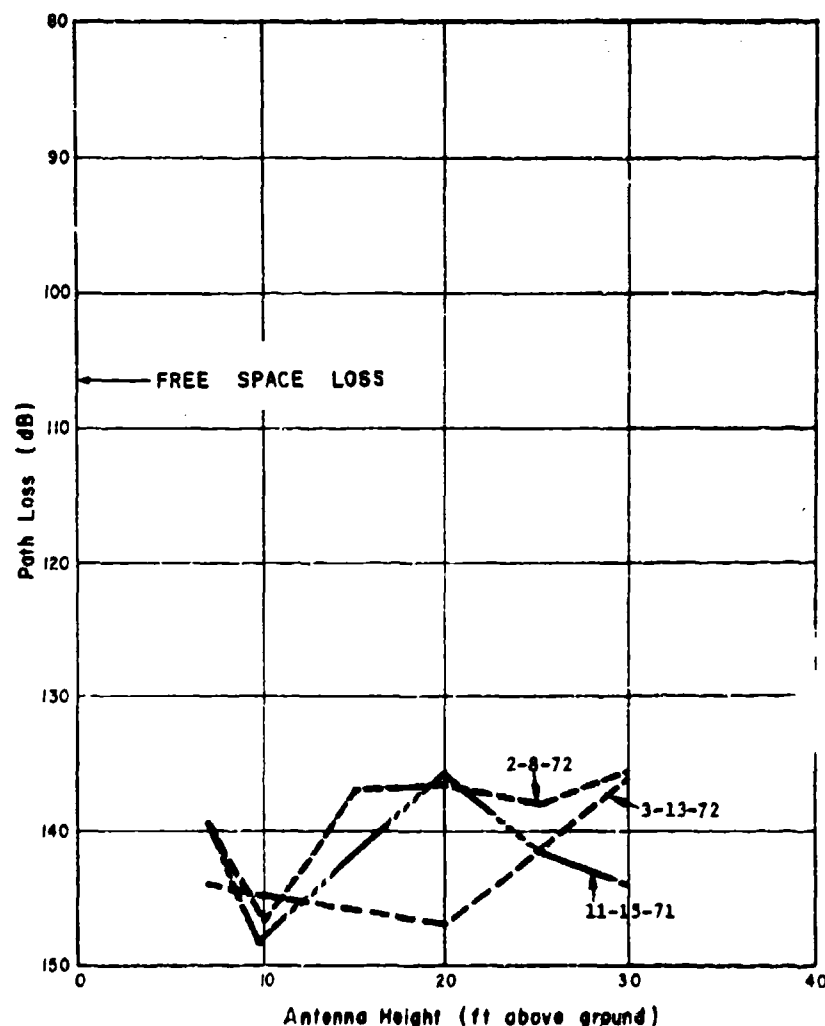


Figure 46. Propagation Path Loss (Site 19 to Hexagon, Frequency 1,345 MHz, Antenna - AEL Horn)

(6) Path: Highlands Site No. 21 to ECOM Hexagon.

Oper. Freq. 1,545 MHz Ant. Type - See Graph

Site description: See subparagraph b (7) above.

31 Jan. 72 - ----- AEL Horn

31 Jan. 72 - ————— Andrews Discone - 1-1/2 inches of snow on ground and melting

1 Feb. 72 - - - - - AEL Horn

Data spread does not exceed 2 dB.

Path loss never more than 6 dB below free space path loss.

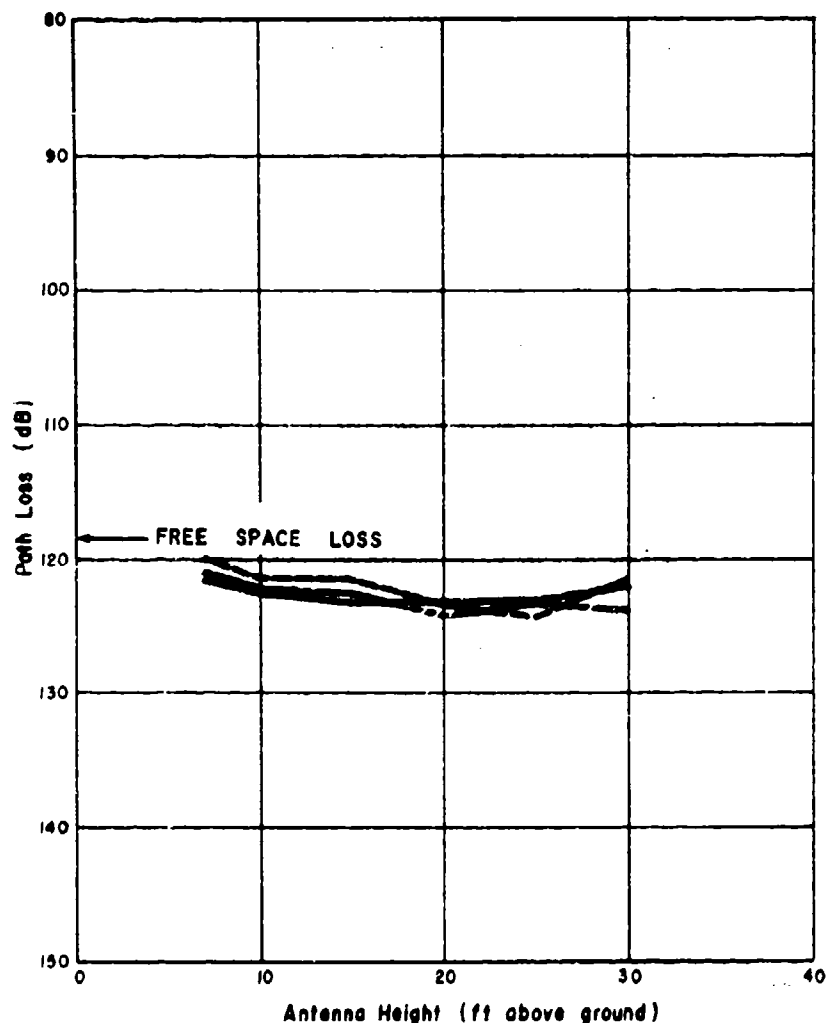


Figure 47. Propagation Path Loss (Site 21 to Hexagon, Frequency 1,545 MHz, Antenna (See Graph) )

(7) Path: Wavside Site No. 19B to ECOM Hexagon - 1.86 miles.

Oper. Freq. 1,545 MHz

Three additional plots are included to provide data for the composite plot for comparing the performance when signals are transmitted in horizontal, vertical, and circular polarisation modes.

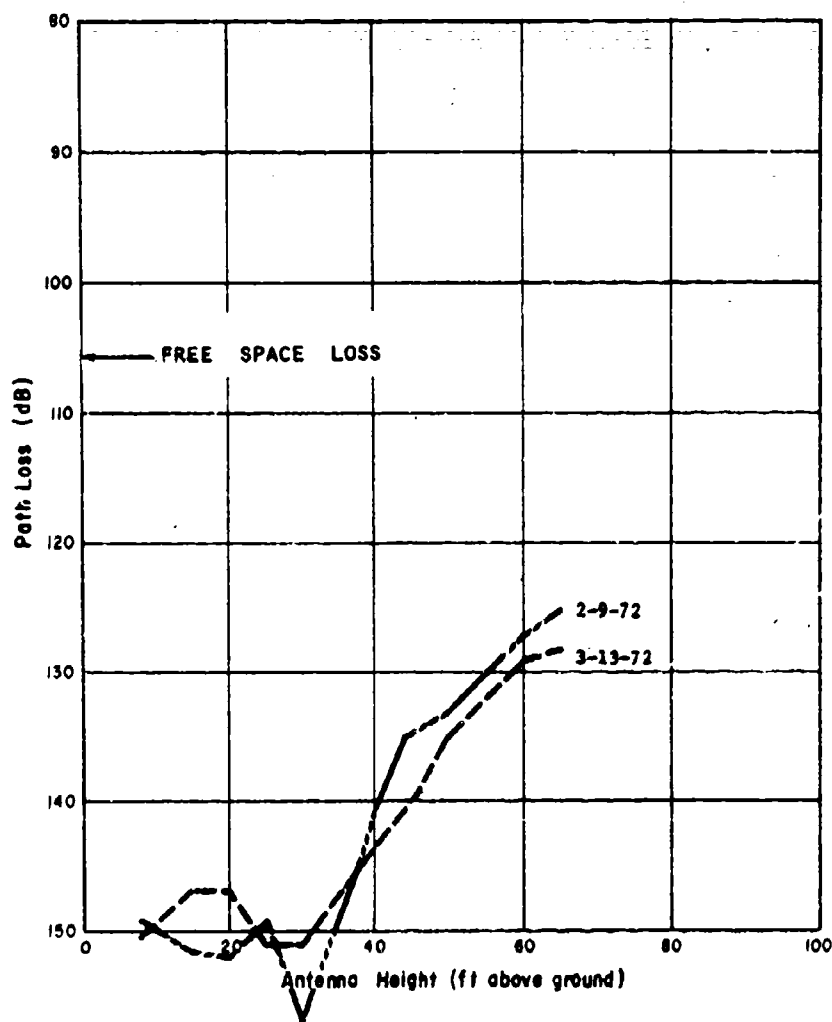


Figure 48. Propagation Path Loss (Site 19B to Hexagon, Frequency 1,545 MHz, Antenna - AEL Horn (Horizontal))

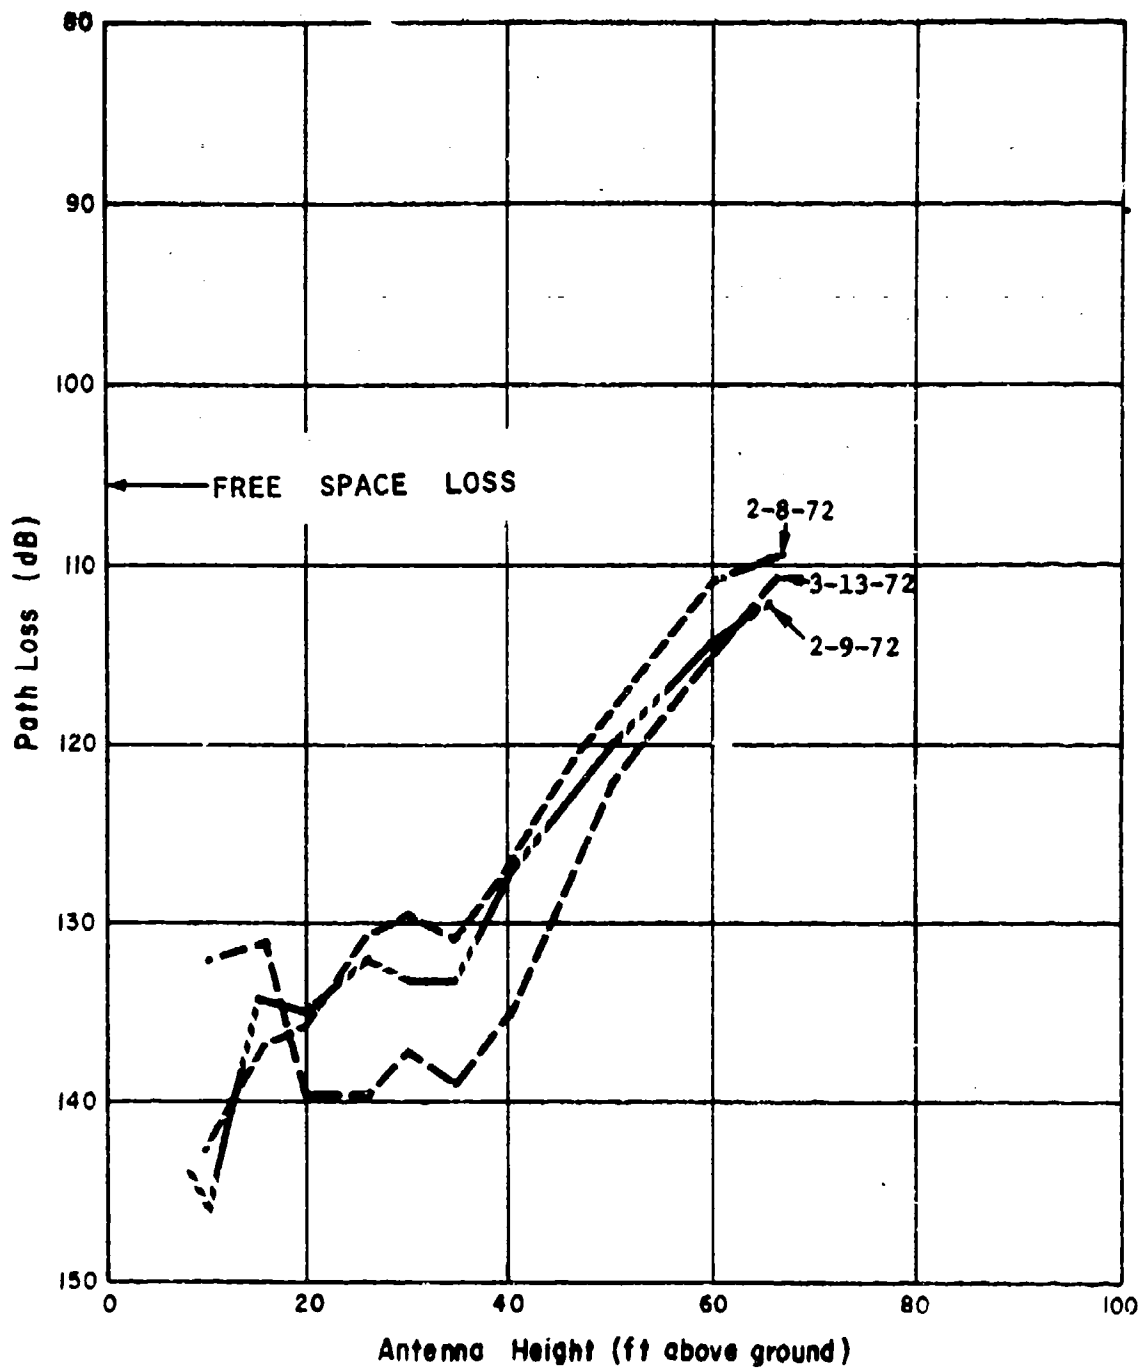


Figure 49. Propagation Path Loss (Site 19B to Hexagon, Frequency 1,545 MHz, Antenna - AEL Horn (Vertical))

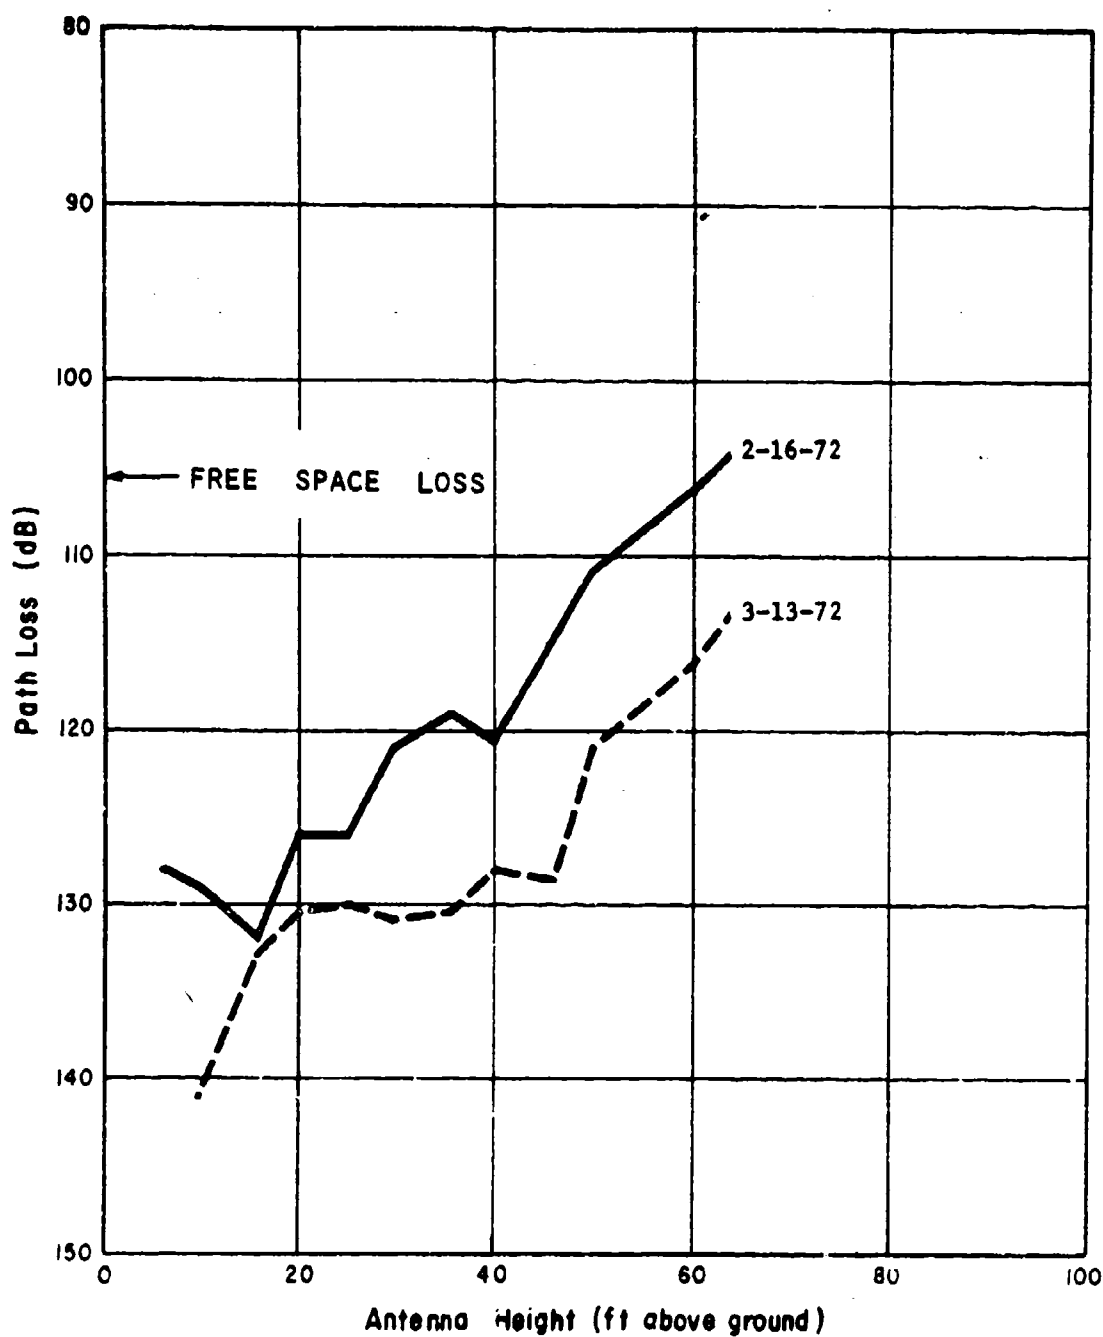


Figure 50. Propagation Path Loss (Site 19B to Hexagon, Frequency 1,545 MHz, Antenna - EMCO 3102 (Circular))



(B) Path: Wyeida Site No. 128 to ECOM Hexagon - 1.86 miles.

Oper. Freq. 1,345 MHz Ant. Type (See Graph)

The advantages of circular polarisation demonstrated on this path for 229.5 and 371.4 MHz are similar at 1,345 MHz. At 1,345 MHz, performance with the AEL Horn antenna in vertical polarisation is 6 to 9 dB below that with the circularly polarised EMEC Model 3102 log spiral antenna for antenna heights above 10 feet. The path loss when using the AEL Horn in horizontal polarisation is from 8 to 20 dB more than with vertical polarisation.

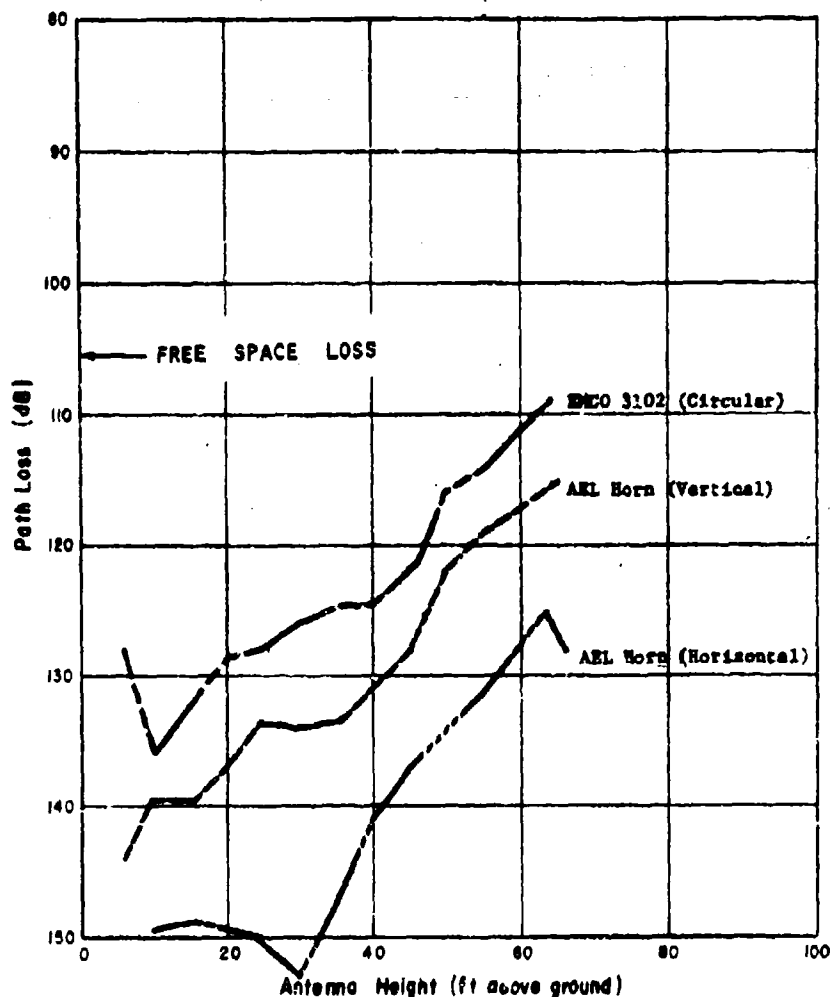



Figure 31. Propagation Path Loss (Site 128 to Hexagon, Frequency 1,345 MHz, Antenna (See Graph) )

## 9. COMMENTS ON THE TEST RESULTS

The path loss tests were conducted in the vicinity of the Hexagon Building, Fort Monmouth, and within a radius of less than 10 miles from it. Propagation paths varied from line of sight to completely out of line of sight, through trees and brush. The maximum losses at 1,545 MHz were approximately 150 dB, and it was possible to receive the signal from all sites. At 229.5 and 371.4 MHz, the maximum losses were close to 135 dB under the same conditions.


The test included experiments with vertically polarized, horizontally polarized, and circularly polarized antennas. The results indicated that there is some signal depolarization, probably due to the obstructions in the signal path.

The free space loss for any path length can be calculated from the expression - Loss =  $36.58 + 20 \log_{10} d + 20 \log_{10} f$ , where  $d$  is in statute miles and  $f$  in MHz. To determine the path loss which is due to physical factors in the path other than free space loss, the free space loss is subtracted from the total loss. This was done for all tests covered in this report and the results plotted in Figures 52, 53, and 54 for 1,545, 371.4, and 229.5 MHz respectively. These plots show the range of path losses, in addition to the free space path losses, which we observed, as a function of antenna height, independent of distance between the transmitter and receiver, but within our less than 10-mile radius test area. The plots contain areas which are striped, crosshatched, and solid. The solid areas are the results of data obtained where there was definitely clear line of sight between the transmitting and receiving antennas. The striped areas are based on data obtained from paths where there was definitely no line of sight. The crosshatched areas are based upon results where there was marginal line of sight. Obviously, although the plot shows a clear border between these areas, these borders are only approximate and cannot be that sharply defined. These plots, however, do show the maximum losses that we experienced in our area in addition to the free space loss. With them, one can estimate the antenna height required for a system of known gains, transmitter power, and receiver sensitivity, or conversely the required transmitter power if the other parameters are fixed.

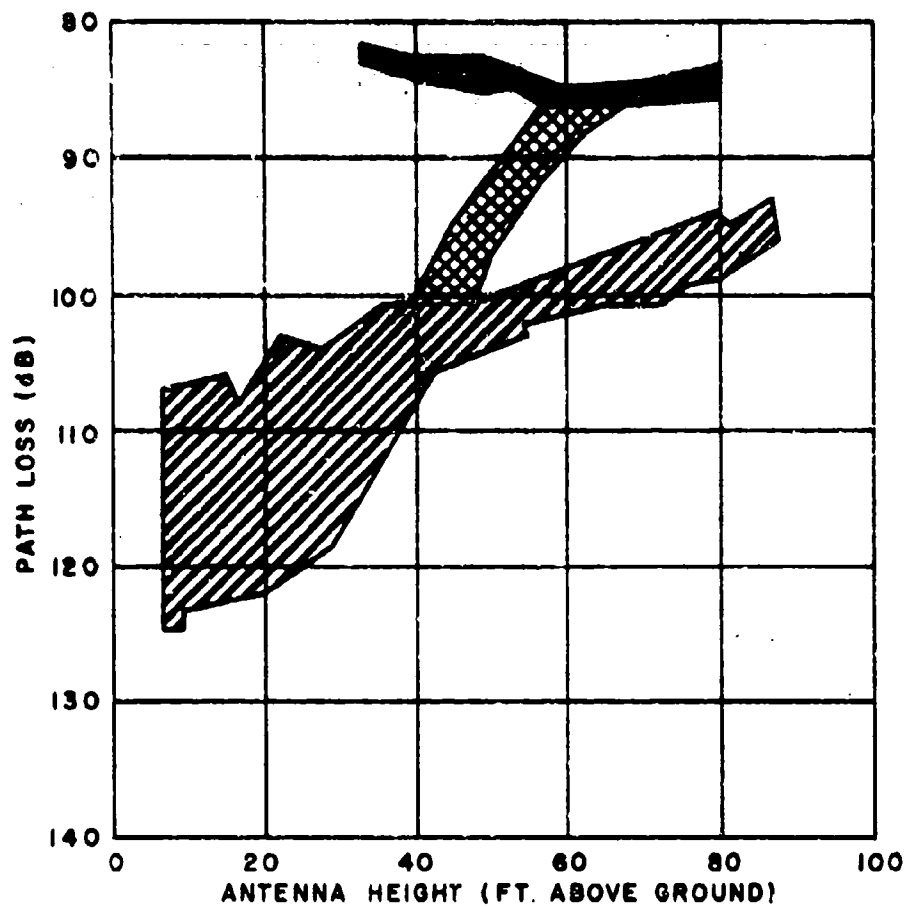

LOSS BELOW FREE SPACE LOSS  
 FREQ. 1545 MHz ANT. POLARIZATION VERTICAL


Figure 52. Propagation Path Loss - 1,545 MHz

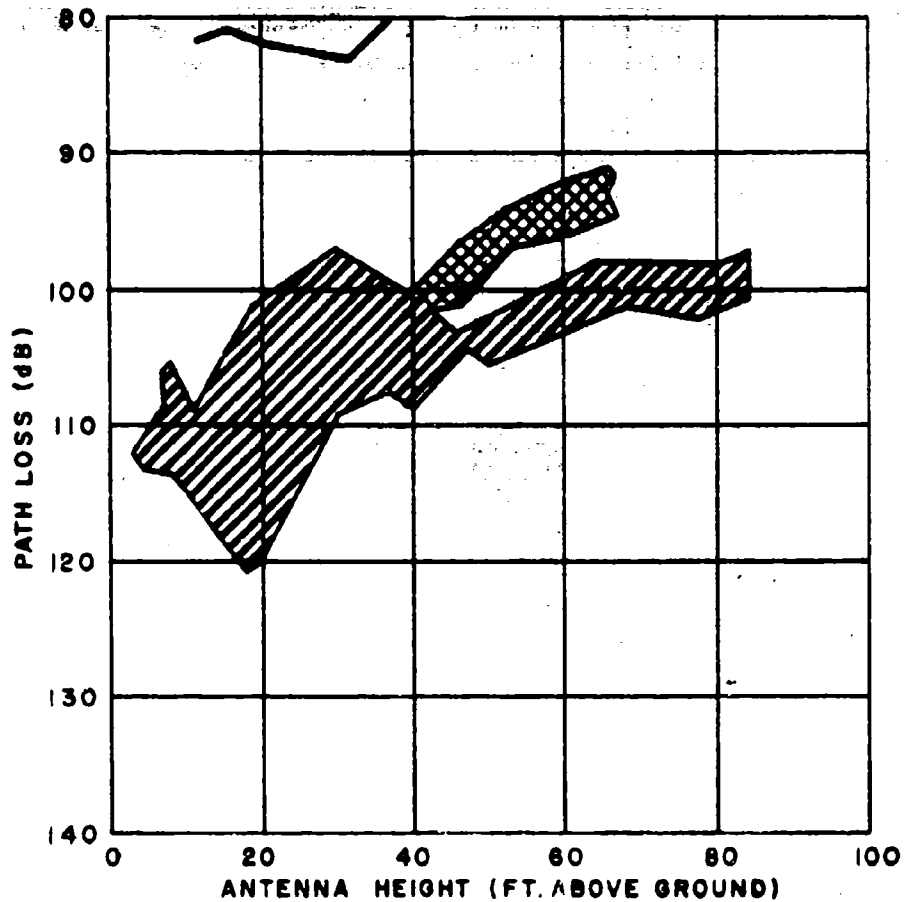

LOSS BELOW FREE SPACE LOSS

FREQ. 371.4 MHz ANT. POLARIZATION VERTICAL

Figure 53. Propagation Path Loss - 371.4 MHz

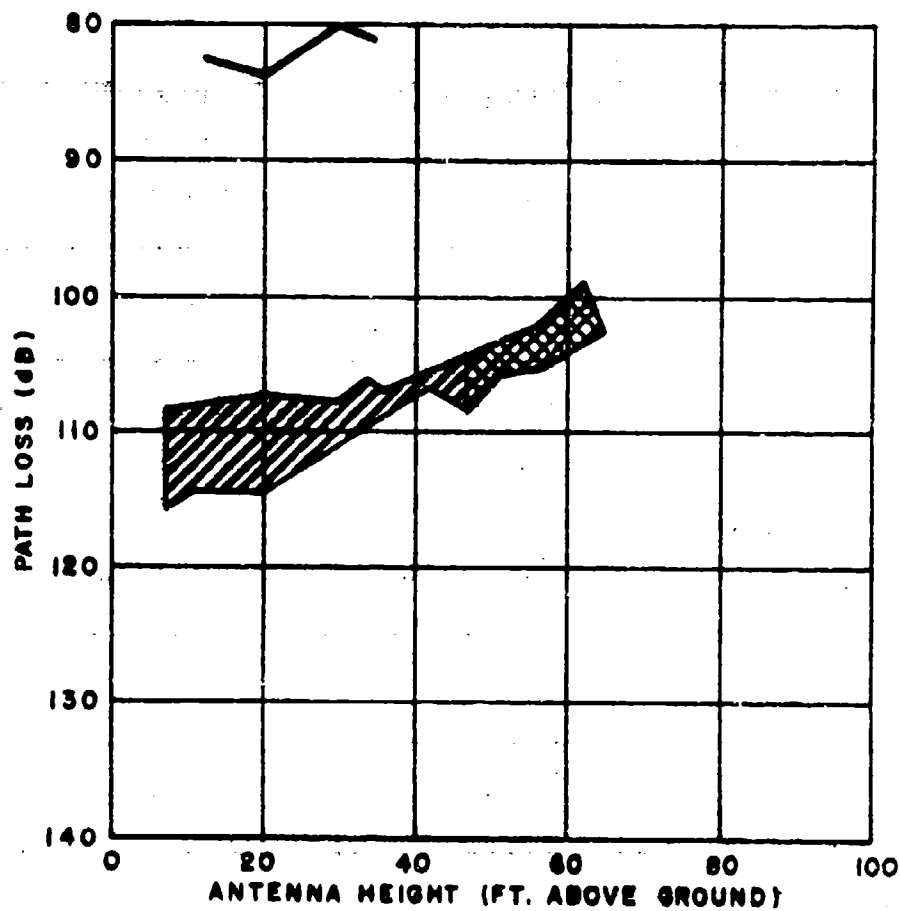


LOSS BELOW FREE SPACE LOSS  
 FREQ. 229.5 MHz ANT. POLARIZATION VERTICAL

Figure 54. Propagation Path Loss - 229.5 MHz

**APPENDIX**  
**REDUCED DATA**

TEST RUN #	AVERAGE PROPAGATION	24 JAN. 1972
120124-05	PATH LOSS AEL MCA SITE	
	NO. 5 TO LCOM HEXAGON	


**FREQUENCY: 1545 MHZ**

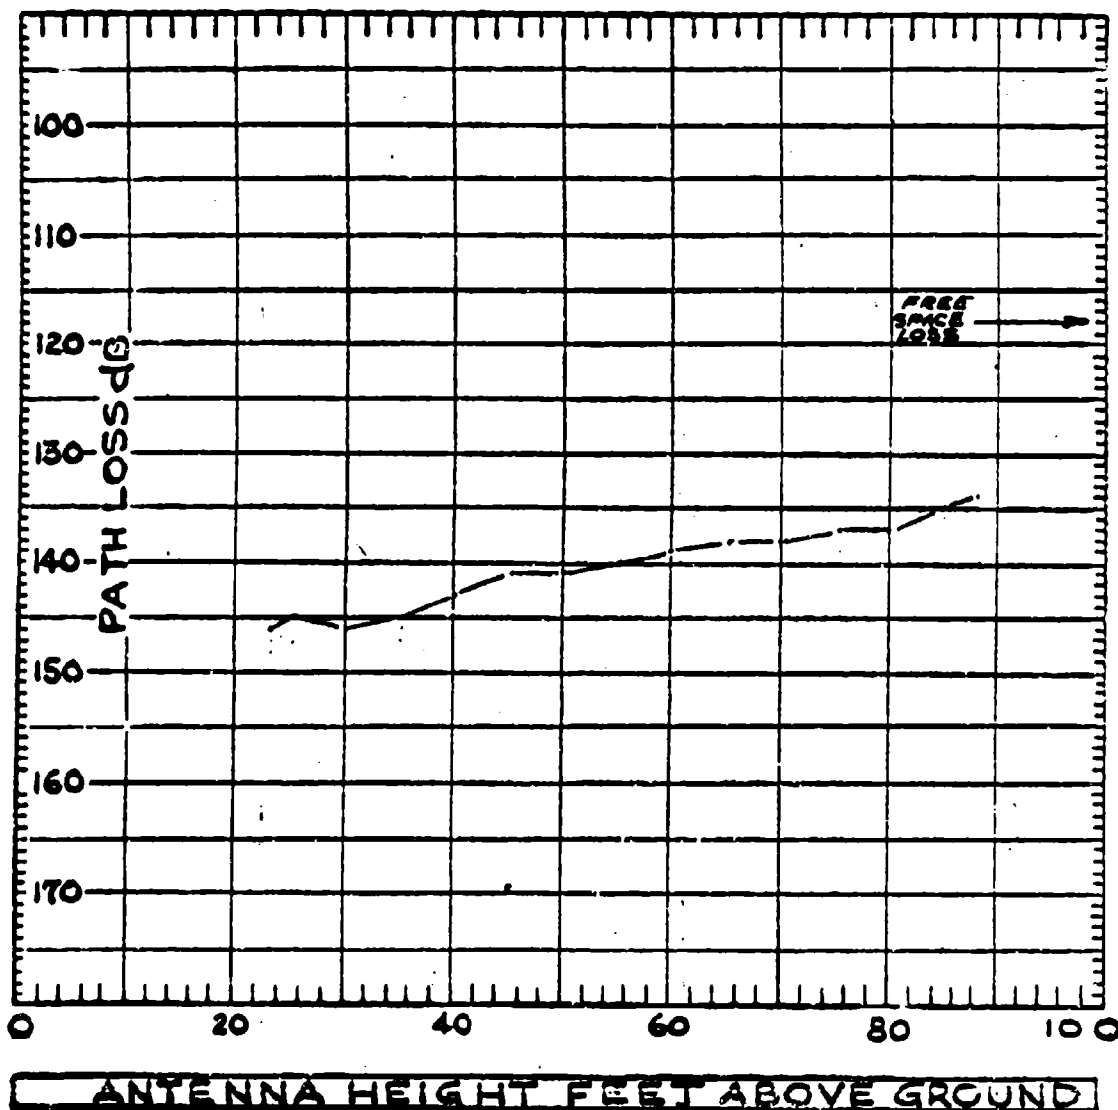

TEST DATA SHEET										DATE: 24 JANUARY 72	
OPER. FREQ.		1545 MHz		REC. SITE ANT. HT.		FT.		START:		MRS.	
SITE		LOCATION		XMTR PWR.		TYPE ANTENNA		ANT. GAIN (dB)		CABLE LOSSES (dB)	
TRANSMITTER		ALL MCA No. 5		44 dBm		REL 1/00RN		14.4		6.5	
RECEIVER		ECOM HEXAGON				ANALOG BICONICAL		0.3		1.2	
TOTAL ANT. GAIN (XMTR + REC.)		14.4 + 0.3 =		14.7 dB						+ANT. GAINS 19.7	
TOTAL CABLE LOSS (XMTR + REC.)		6.5 + 1.2 =		7.7 dB						-CABLE LOSSES 7.7	
XMTR. SITE HEIGHT ABOVE SEA LEVEL		155 FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL		145 FT.				-ESP = 51.0	
XMTR. ANT. HT. ABOVE GND (FT)		RCVD. PWR. (dBm)		PATH LOSS (dB) - (RCVD. PWR.)		AVG. PATH. LOSS (dB)		NO. OF SAMP		REMARKS	
TEST	TEST	TEST	TEST								
720124-03				720124-03							
88	83			134		134		1			
85	84			135		135					
80	86			137		137					
75	86			137		137					
70	87			138		138					
65	87			138		138					
60	88			139		139					
55	89			140		140					
50	90			141		141					
45	90			141		141					
40	92			143		143					
35	94			145		145					
30	95			146		146					
25	94			145		145					
23	95			146		146		1			

TEST RUN 571	AVERAGE PROPAGATION	25 JAN 1972
420125-01	PATH LOSS ALL MCA SITES	
	NO 2 TO ECOM HANSON	

FREQUENCY: 1548 MHz

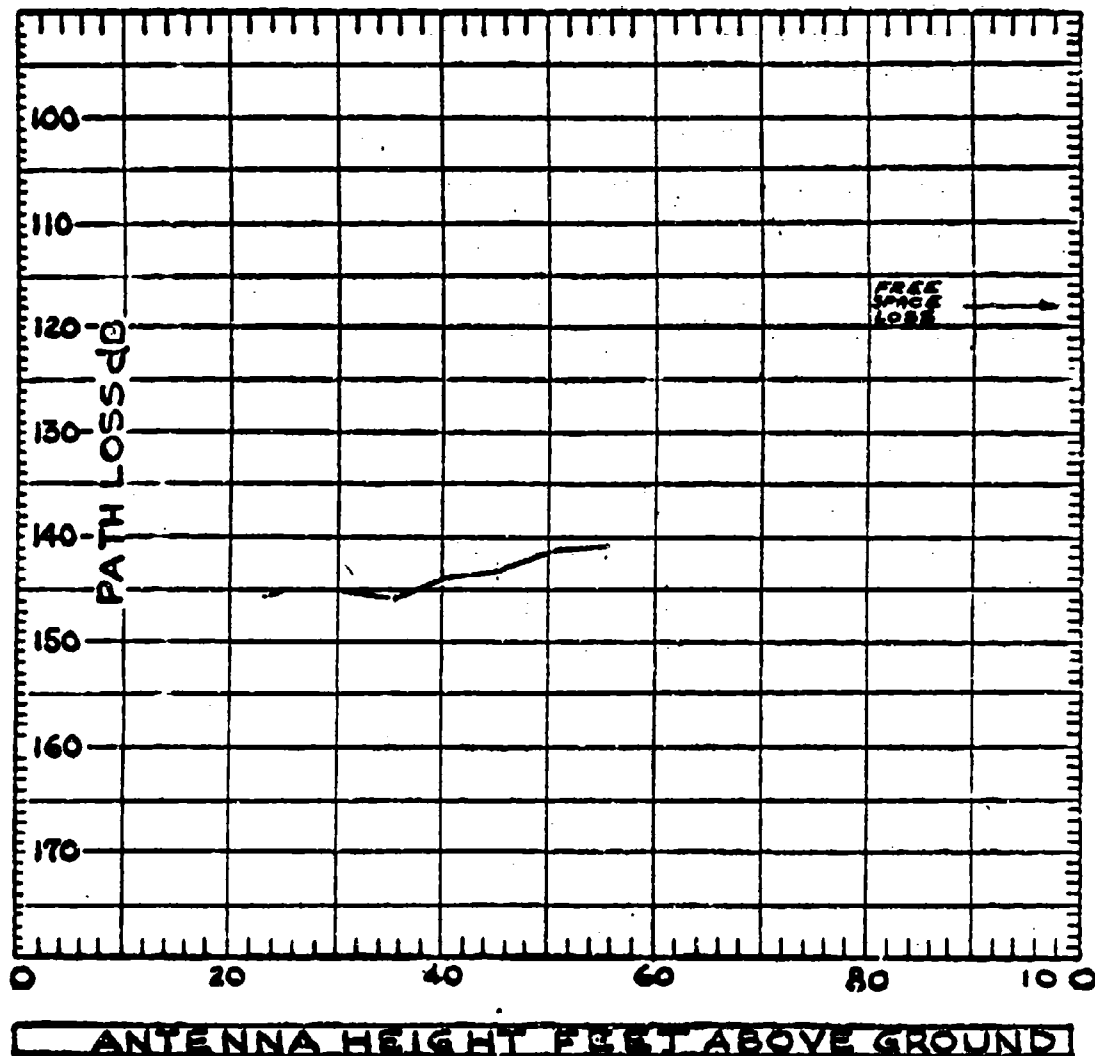






TEST RUN BY	AVERAGE PROPAGATION	25 JAN 1972
720126-01	PATH LOSS AVE HCA SITE	
	NOA TO ECOM HERRASON	


FREQUENCY: 1545 MHz

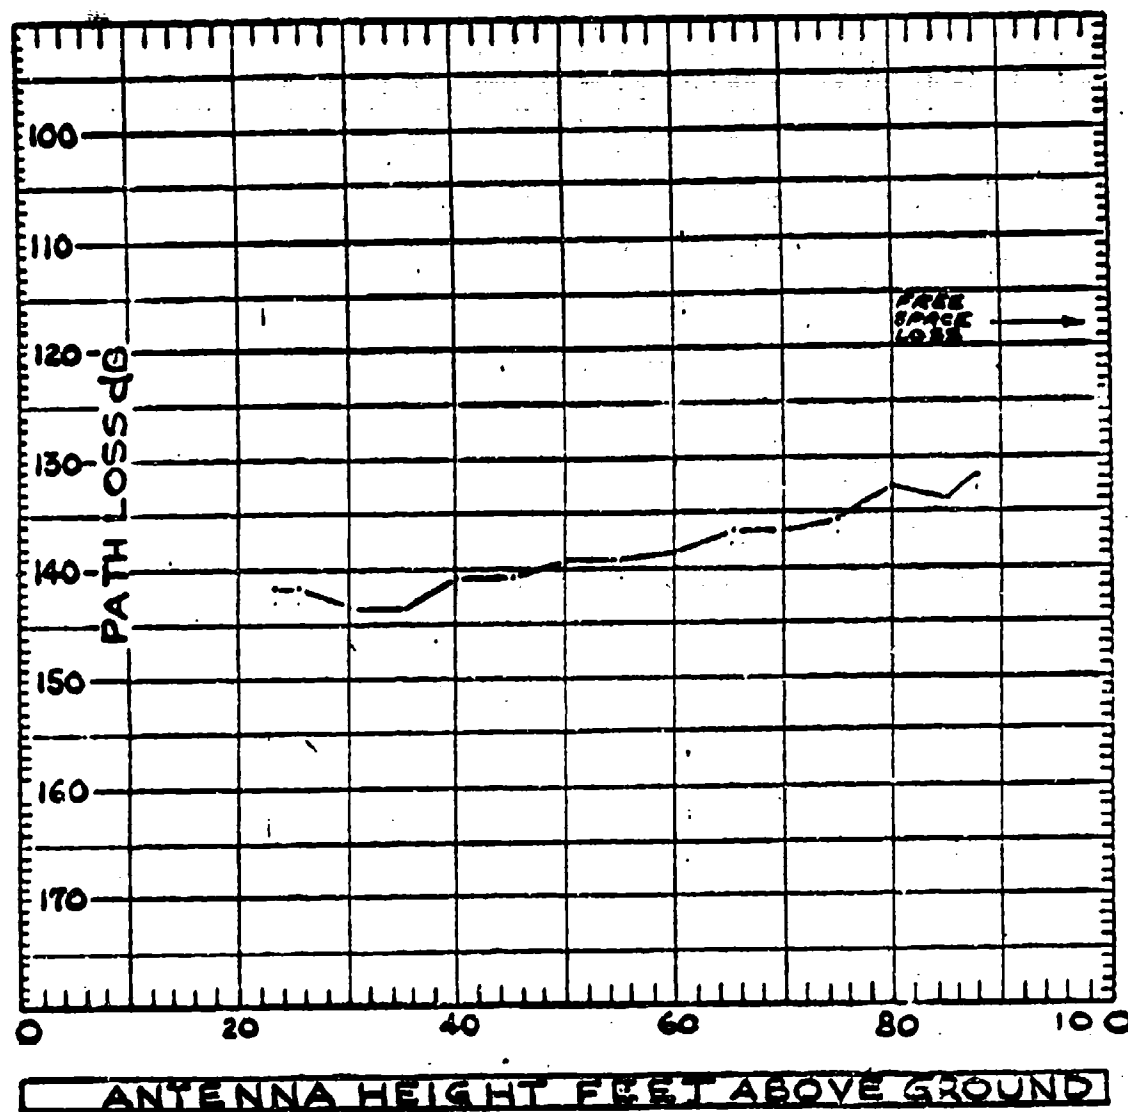

TEST DATA SHEET									
OPER. FREQ.		1545 MHZ		REC. SITE ANT. HT.		FT.		DATE: 26 JANUARY 1972	
START: 1407 HRS.									
SITE	LOCATION	XMITR	TYPE ANTENNA	ANT GAIN (dB)	CABLE LOSSES (dB)	EQUIV. SYS. PWR. (ESP)			
TRANSMITTER	AEL MCA #5	44-1B1	AEL HORN	14.4	5.3	XMITR. PWR. 44			
RECEIVER	ECOM HEXAGON		ANDREW ALCONICAL	0.3	1.2	ANT. GAINS 14.7			
TOTAL ANT. GAIN (XMITR + REC.)		14.4 + 0.3 = 14.7 dB							
TOTAL CABLE LOSS (XMITR + REC.)		5.3 + 1.2 = 6.5 dB							
XMITR. SITE HEIGHT ABOVE SEA LEVEL		155 FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL		145 FT.			
XMITR. ANT. HT. ABOVE GND (FT)	RCVD. PWR. (dBm)	TEST		PATH LOSS (dB) = (ESP) - (RCVD. PWR.)		AVG. PATH. LOSS (dB)	NO. OF SAMPL	REMARKS	
88	720126-01			720126-01		132	1		
85	80			132		134			
80	82			134		133			
75	81			133		136			
70	84			136		137			
65	85			137		137			
60	85			137		138			
55	87			139		140			
50	88			140		140			
45	88			141		141			
40	89			141		141			
35	92			144		144			
30	92			144		144			
25	90			142		142			
23	90			142		142			

TEST RUN S/N	AVERAGE PROPAGATION	27 JAN 1972
76127-01, 02	PATH LOSS AEL MCA SITE	
03 AND 04	NO 5 TO ECOM HEXAGON	

FREQUENCY: 134.5 MHz

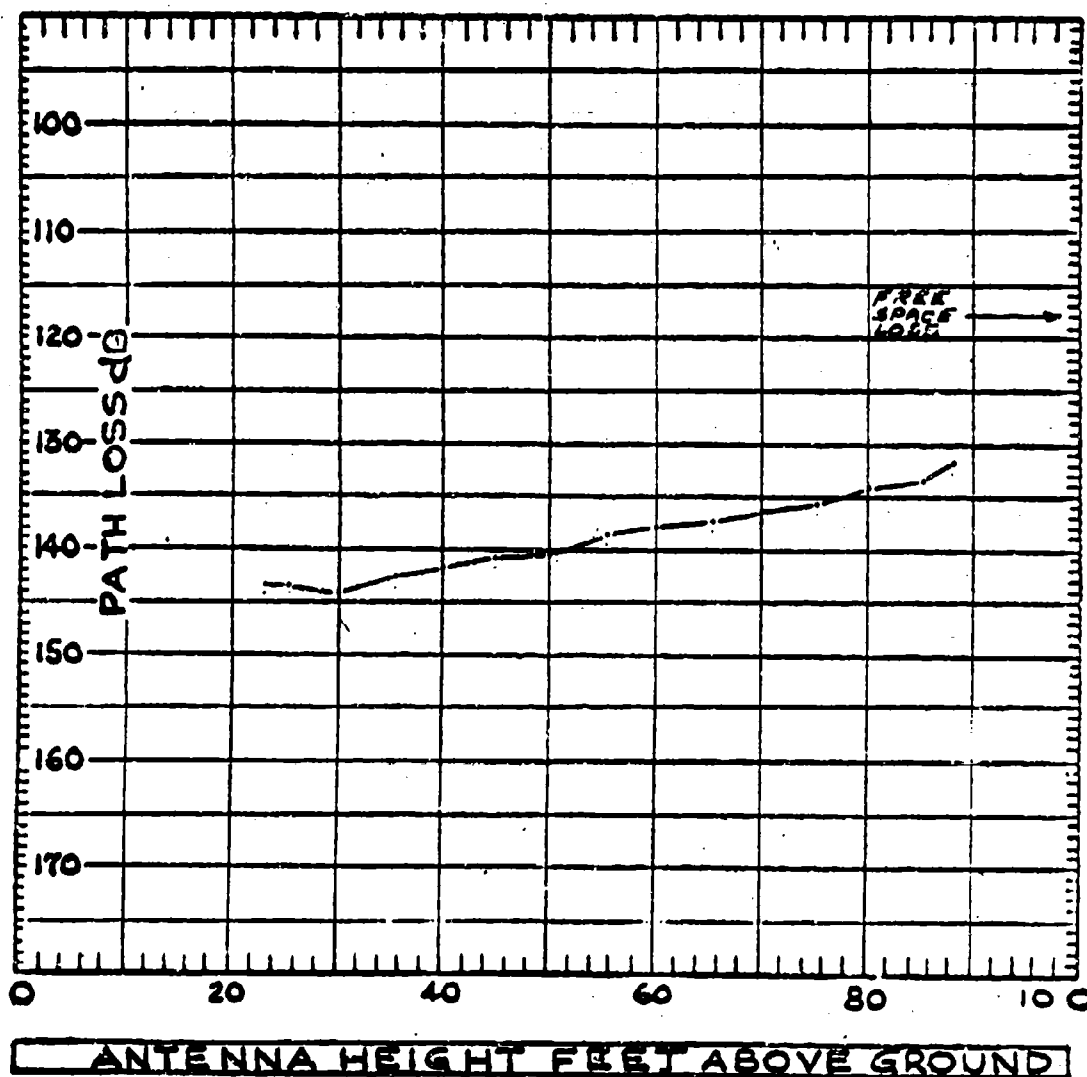


TEST DATA SHEET										DATE: 27 JANUARY 72	
OPER. FREQ.		1545 MHz		REC. SITE ANT. HT.		FT.		START: 0930 HRS.			
SITE		LOCATION		XMTTR		TYPE		ANT		GAIN	
TRANSMITTER		DEL MCA 5		44JBM		REL Horn		14.4			
RECEIVER		LCOM Hexagon				ANDREW BICONICAL		0.3			
TOTAL ANT. GAIN (XMTTR + REC.)		14.4 + 0.3 =		14.7 dB							
TOTAL CABLE LOSS (XMTTR + REC.)		5.3 + 1.2 =		6.5 dB							
XMTTR. SITE HEIGHT ABOVE SEA LEVEL		135 FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL		14.5 FT.					
XMTTR. ANT. HT. ABOVE GND (FT)		RCVD. PWR. (dBm)		PATH LOSS (dB) = (ESP) - (RCVD. PWR.)			AVG. PATH. LOSS (dB)			NO. OF SAMP	
		TEST	TEST	720127-01	720127-02	720127-03	720127-01	720127-02	720127-03		
23	90	92	92	142	144	144	143.3	143.3	141	4	END 720127-01
25	90	92	92	142	144	144	143.3	143.3	1045	1	START 720127-02
30	90	93	93	142	145	145	144.0	144.0	1120		END 720127-02
35	89	91	92	141	143	144	142.5	142.5	1340		START 720127-03
40	89	90	90	141	142	142	141.8	141.8	1407		END 720127-03
45	88	89	89	140	141	141	140.8	140.8			
50	87	89	89	139	141	141	140.3	140.3			AVG. PATH
55	87	87	87	139	139	139	138.8	138.8			LOSS (dB)
60	85	87	86	137	139	138	138.0	138.0			INCLUDES
65	85	86	86	137	138	138	137.5	137.5			TEST RUN 5/N 720127-01
70	83	85	85	133	137	137	136.3	136.3			720127-03
75	82	84	84	134	136	136	135.3	135.3			720127-02
80	81	82	83	133	134	134	134.0	134.0			720127-01
85	81	81	82	133	133	133	133.3	133.3			
88	79	80	80	131	132	132	131.8	131.8	4		



TEST RUN 5/N	AVERAGE PROPAGATION	27 JAN 1972
720127-05	PATH LOSS AEL MEASUREMENT	
720127-06	NO 5 TO ECOM HEXAGON	

FREQUENCY: 371.4 MHz

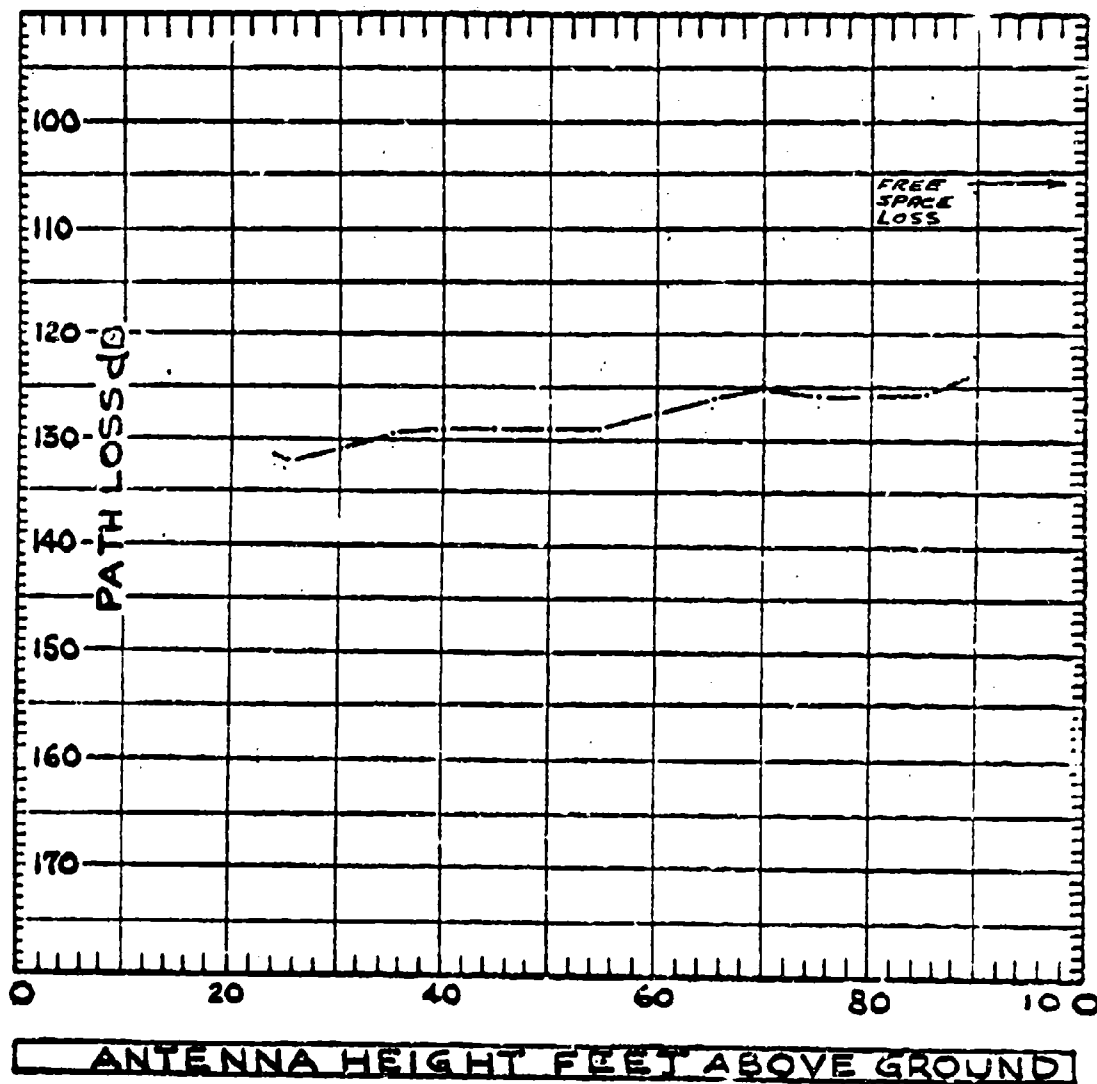






TEST RUN 3/N	AVERAGE PROPAGATION	28 JAN 1972
720128-05	PATH LOSS AEL MEASURES	
	TO ECOM HERAGON	

FREQUENCY: 229.5 MHz

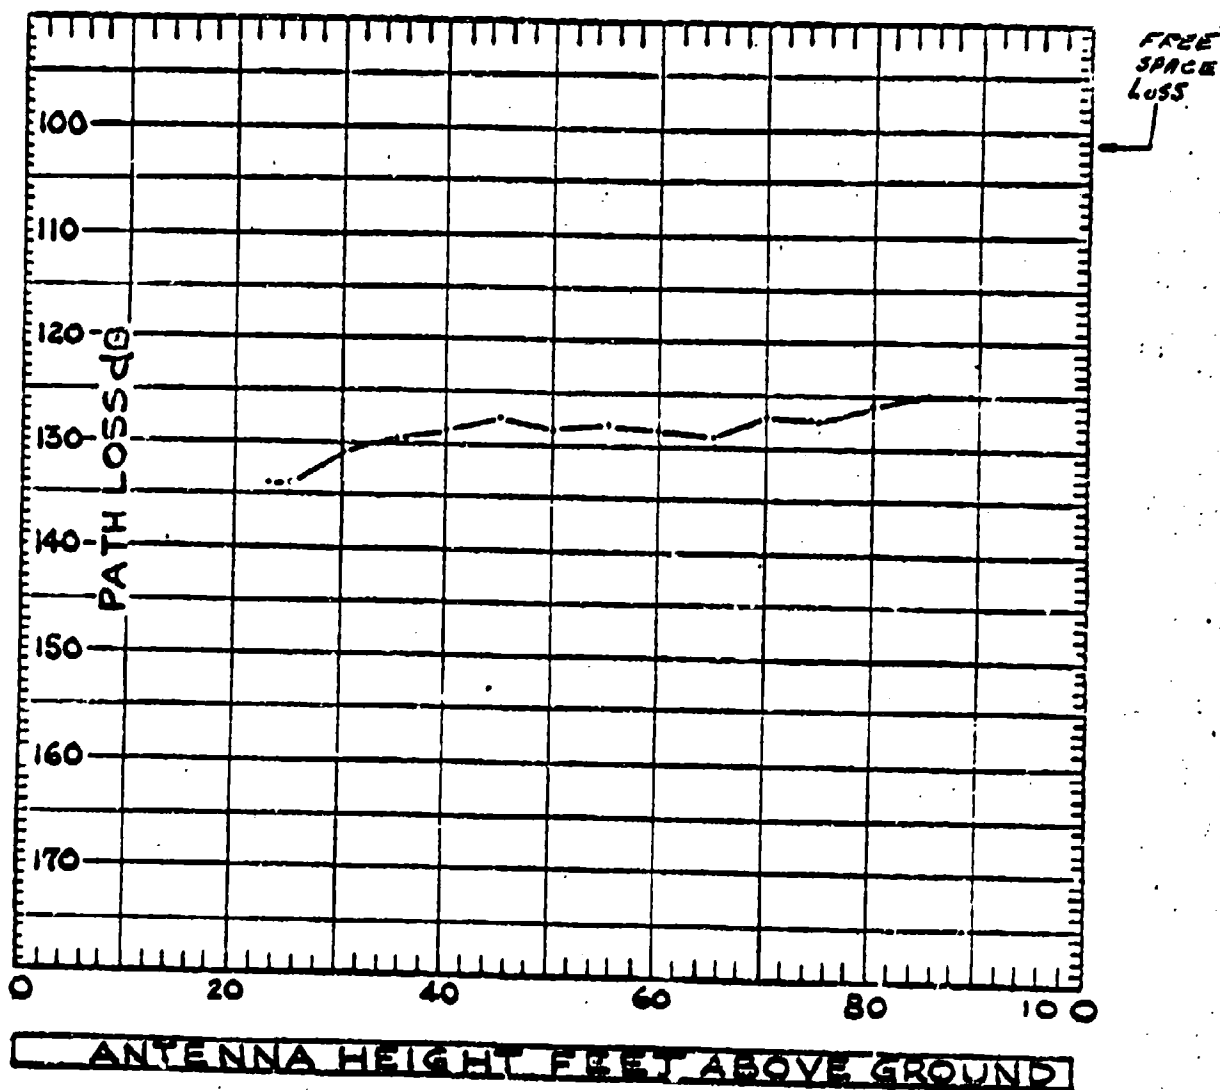


TEST DATA SHEET									
OPER. FREQ.		229.5 MHz		REC. SITE ANT. HT.		FT.		DATE: 28 JANUARY 72	
				REC. SITE ANT. HT.		FT.		START: 1437 HRS.	
SITE		LOCATION		XMITR. PWR.	TYPE ANTENNA	ANT. GAIN (dB)	CABLE LOSSES (dB)	EQUIV. SYS. PWR. (ESP)	
TRANSMITTER		DEL MCA 5		44 dBm	AT 197	1.2	2.5	XMITR. PWR. 4.1	
RECEIVER		ECOM HELIXAGON			AT 197	1.2	1.8	+ANT. GAINS 2.4	
TOTAL ANT. GAIN (XMITR + REC.)		1.2 + 1.2 = 2.4				dB		-CABLE LOSSES 1.2	
TOTAL CABLE LOSS (XMITR + REC.)		2.5 + 1.8 = 4.3				dB		-ESP = 41.9	42
XMITR. SITE HEIGHT ABOVE SEA LEVEL		155		FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL		140	
FT.									
XMITR. ANT. HT. ABOVE GND (FT)	RCVD. PWR. (dBm)	TEST	TEST	TEST	PATH LOSS (dB) = (ESP) - (RCVD. PWR.)	AVG. PATH. LOSS (dB)	NO. OF SAMPL	REMARKS	
23	92	720128-03		720128-03	134	134.0	2	WIND 270° 2 KTS	
25	92				134	134.0	2	GUSTING TO 8 KTS	
30	89				131	131.0	2	TEMP. 27°F	
35	88				130	129.5	2		
40	87				129	128.5	2		
45	86				128	127.5	2		
50	87				129	128.5	2		
55	87				129	128.0	2		
60	87				129	128.5	2		
65	87				129	129.0	2		
70	85				127	127.0	2		
75	85				127	127.5	2		
80	84				126	126.0	2		
85	83				125	125.0	2		
89	83				125	125.0	1		
85	83				125				
80	84				126				
75	86				128				
70	85				127				
65	87				129				



PROPAGATION PATH LOSS  
DATE: 28 JANUARY 72 TEST RUN S/N: 720128-01  
PATH: AEL MCA SITE NO. 5 TO ECOM HEXAGON

OPER. FREQ.: 371.4 MHz

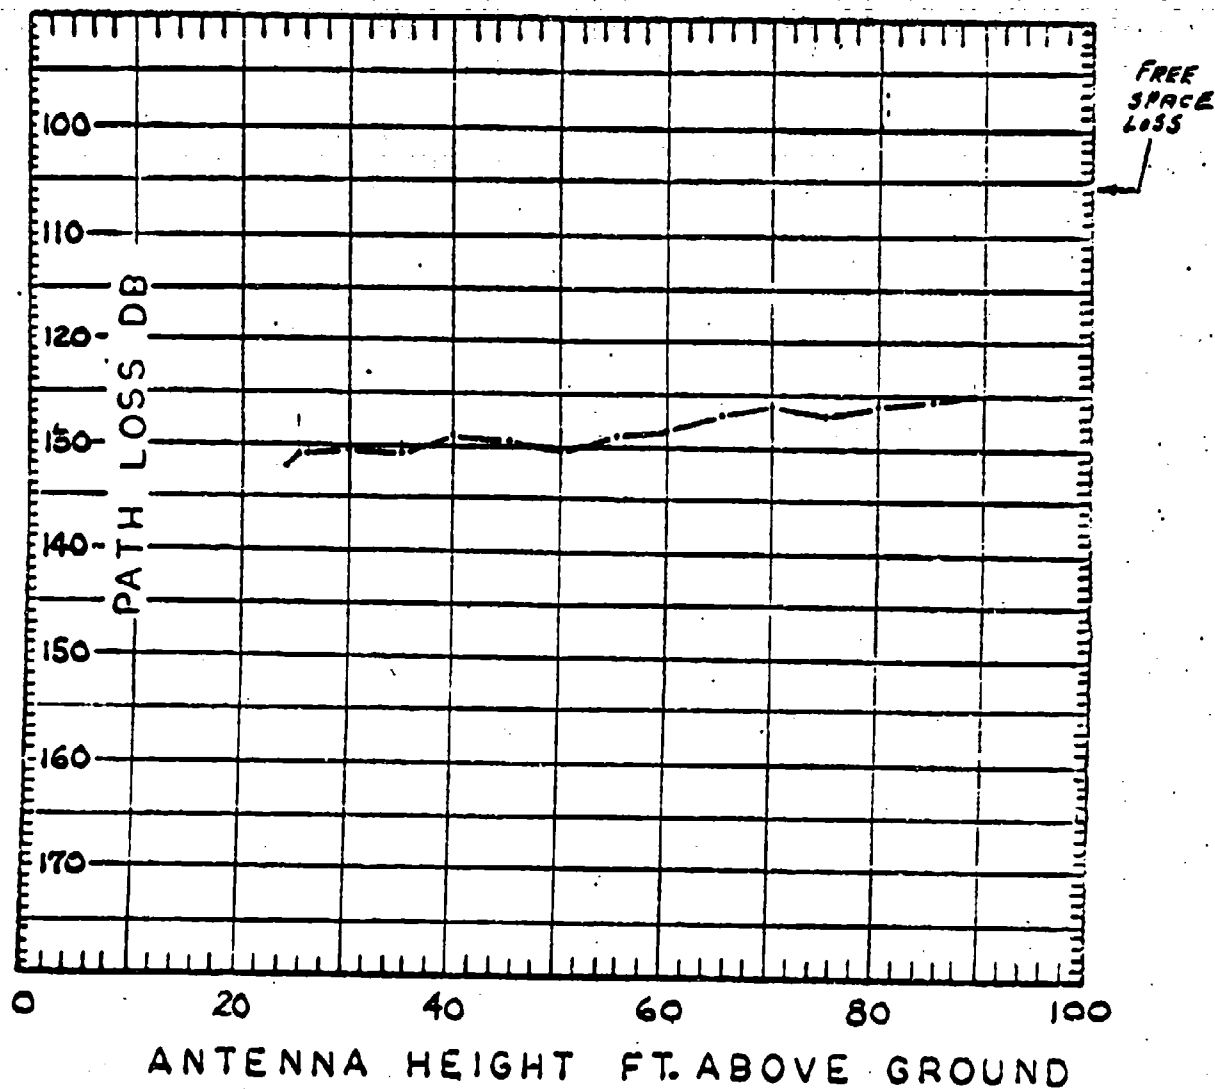


TEST DATA SHEET									
OPER. FREQ.		371.4 MHZ		REC. SITE ANT. HT.		FT.		DATE: 28 JANUARY 1972	
				ANT. GAIN (dB)		CABLE LOSSES (dB)		EQUIV. SYS. PWR. (ESP)	
TRANSMITTER		AEL MCA 5		AT 197		2.0		44	
RECEIVER		ECOM HEXAGON		AT 197		2.0		4.0	
TOTAL ANT. GAIN (XMT + REC.)		2.0 + 2.0 = 4.0		dB				- CABLE LOSSES 4.0 ✓	
TOTAL CABLE LOSS (XMT + REC.)		2.2 + 2.3 = 4.5		dB				PSP - 43.5 USE 44	
XMT. SITE HEIGHT ABOVE SEA LEVEL		155		FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL		140 FT.	
XMT. ANT. NO.	RCVD. PWR. (dBm)	PATH LOSS (dB) = (ESP) - (RCVD. PWR.)		Avg. PATH. LOSS (dB)	NO. OF SAMP	REMARKS			
	TEST TEST								
24	88	72.0128-01	132	132	2	WIND CALM - 1 KT.			
25	87		131	131	1				
30	86		130	130.5		SOME ICE FORMATION ON ANTENNA			
35	87		131	131					
40	84		128	129					
45	85		129	129.5					
50	86		130	130.5					
55	85		129	129.0					
60	85		129	128.5					
65	83		127	127.0					
70	82		126	126.0					
75	82		126	127.0	1				
80	81		125	126.0					
85	82		126	125.5	2				
89	81		125	125.0	1				
85	81		125						
80	83		127						
75	84		128						
70	82		126						
65	83		127						



TEST RUN 5/N	AVERAGE PROPAGATION	28 JAN 1972
720128-02	PATH LOSS ABL RFA SITE	
	NO. 2 TO 120M HIRAKON	

FREQUENCY: 1545 MHZ

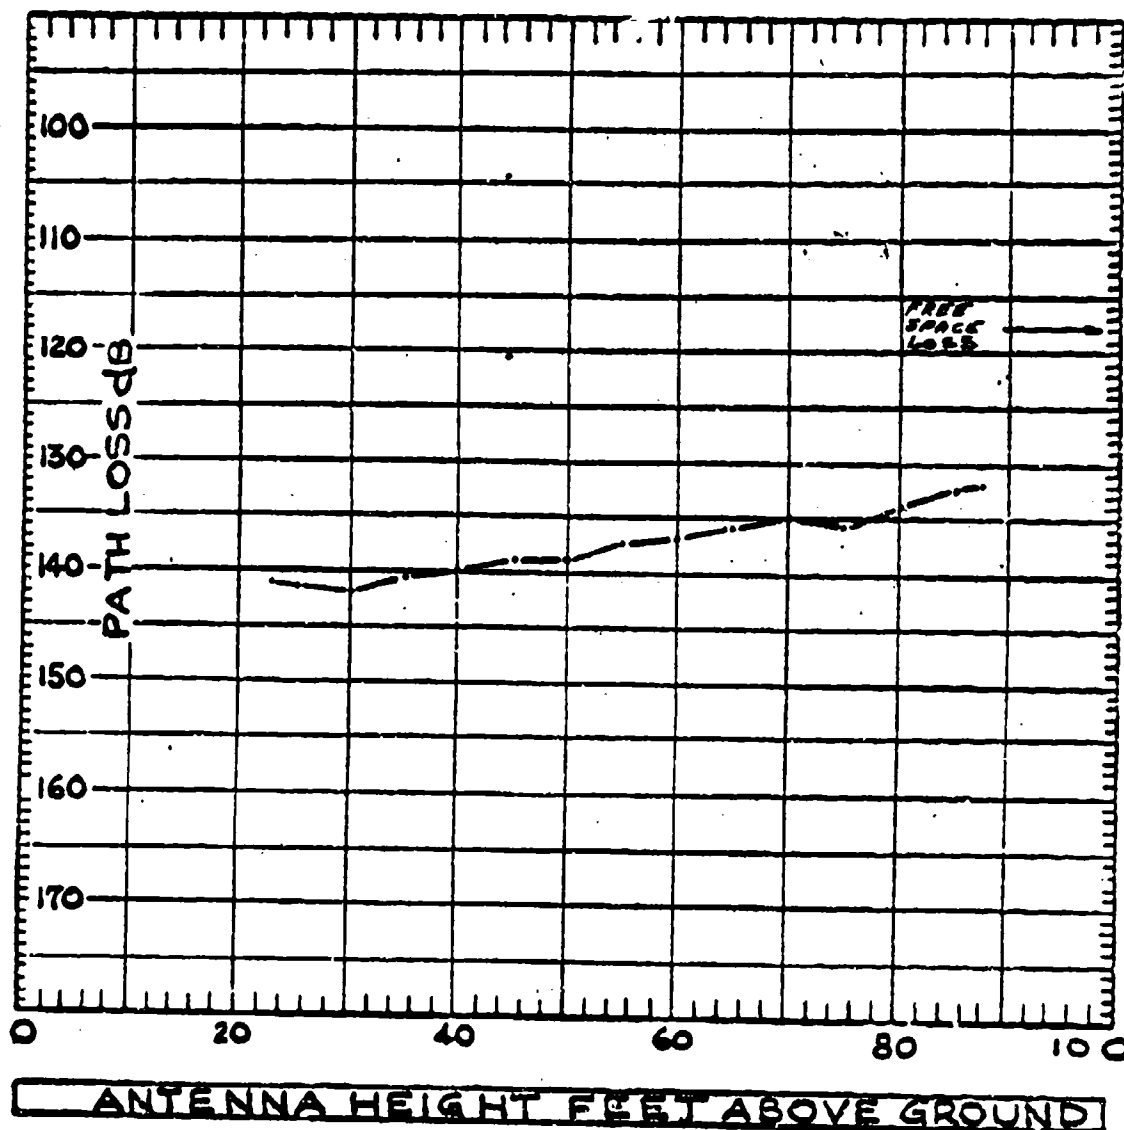


TEST DATA SHEET									
OPER. FREQ.		1545 MHz		DATE: 28 JANUARY 72		REC. SITE ANT. HT.		FT.	
SITE		LOCATION		XMT. PWR.		TYPE ANTENNA		ANT. GAIN (dB)	
TRANSMITTER		AEL MCA 5		44 dBm		REL HORN		14.4	
RECEIVER		ECOM HEXAGON		[REDACTED]		ANDREW BICONICAL		0.3	
TOTAL ANT. GAIN (XMT + REC.)		14.4 + 0.3 = 14.7		dB				CABLE LOSSES (dB)	
TOTAL CABLE LOSS (XMT + REC.)		7.9 + 1.2 = 9.1		dB				EQUIV. SYS. PWR. (ESP)	
XMT. SITE HEIGHT ABOVE SEA LEVEL		155		FT.				XMT. PWR. 44	
RCVD. PWR. (dBm)		TEST		TEST		PATH LOSS (dB) = (ESP) - (RCVD. PWR.)		AVG. PATH. LOSS (dB)	
XMT. ANT. HT. ABOVE GND (FT)		720128-02		720128-02				NO. OF SAMP	
23	91				141		141.0	2	WIND CALM 270° 1KT
25	91				141		141.0	1	TEMP. 27° F
30	92				142		142.0		2.5 IN. SNOW ON GROUND
35	90				140		140.0		
40	90				140		140.0		
45	89				139		139.0		
50	89				139		139.0		
55	87				137		137.0		
60	87				137		137.0		
65	86				136		136.0		
70	85				135		135.0		
75	84				134		134.0		
80	84				134		134.0		
85	82				132		132.0	2	
88	82				132		132.0	1	
85	83				133				
80	84				134				
75	85				135				
70	85				135				
65	86				136				



TEST DATA SHEET									
OPER. FREQ.		1545 MHz		REC. SITE ANT. HT.		FT.		DATE: 28 JANUARY 72	
								START: 1315 HRS.	
SITE		LOCATION	XMTTR PWR.	TYPE ANTENNA	ANT. GAIN (dB)	CABLE LOSSES (dB)	EQUIV. SYS. PWR. (ESP)		
TRANSMITTER		AEL MCA 5	44 dBm	AEL Horn	14.4	7.9	XMTTR. PWR.	-4.4	
RECEIVER		ECOM HEXAGON		ANDREW BICORNERAL	0.3	1.2	+ANT. GAINS	14.7	
TOTAL ANT. GAIN (XMTTR + REC.)	14.4 + 0.3 = 14.7						-CABLE LOSSES	9.1	
TOTAL CABLE LOSS (XMTTR + REC.)	7.9 + 1.2 = 9.1						-ESP = 49.6 USE JO		
XMTTR. SITE HEIGHT ABOVE SEA LEVEL		155		FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL		145 FT.	
XMTTR. ANT. HT. ABOVE GND (FT)	RCVD. PWR. (dBm)	PATH LOSS (dB) - (RCVD. PWR.)		AVG. PATH. LOSS (dB)		NO. OF SAMP		REMARKS	
	TEST TEST	TEST							
720128-02		720128-02							
60	87	137							
55	88	138							
50	89	139							
45	89	139							
40	90	140							
35	91	141							
30	92	142							
25	92	142							
23	91	141						END 720128-02 1345	

TEST RUN 5/N AVERAGE PROPAGATION	31 JAN 1972
WPT#1-01, 02 PATH LOSS SIGNAL ANTS	
AND 0A. SITE NO. 2 TO ECH HEXAGON	

FREQUENCY: 154.5 MHz

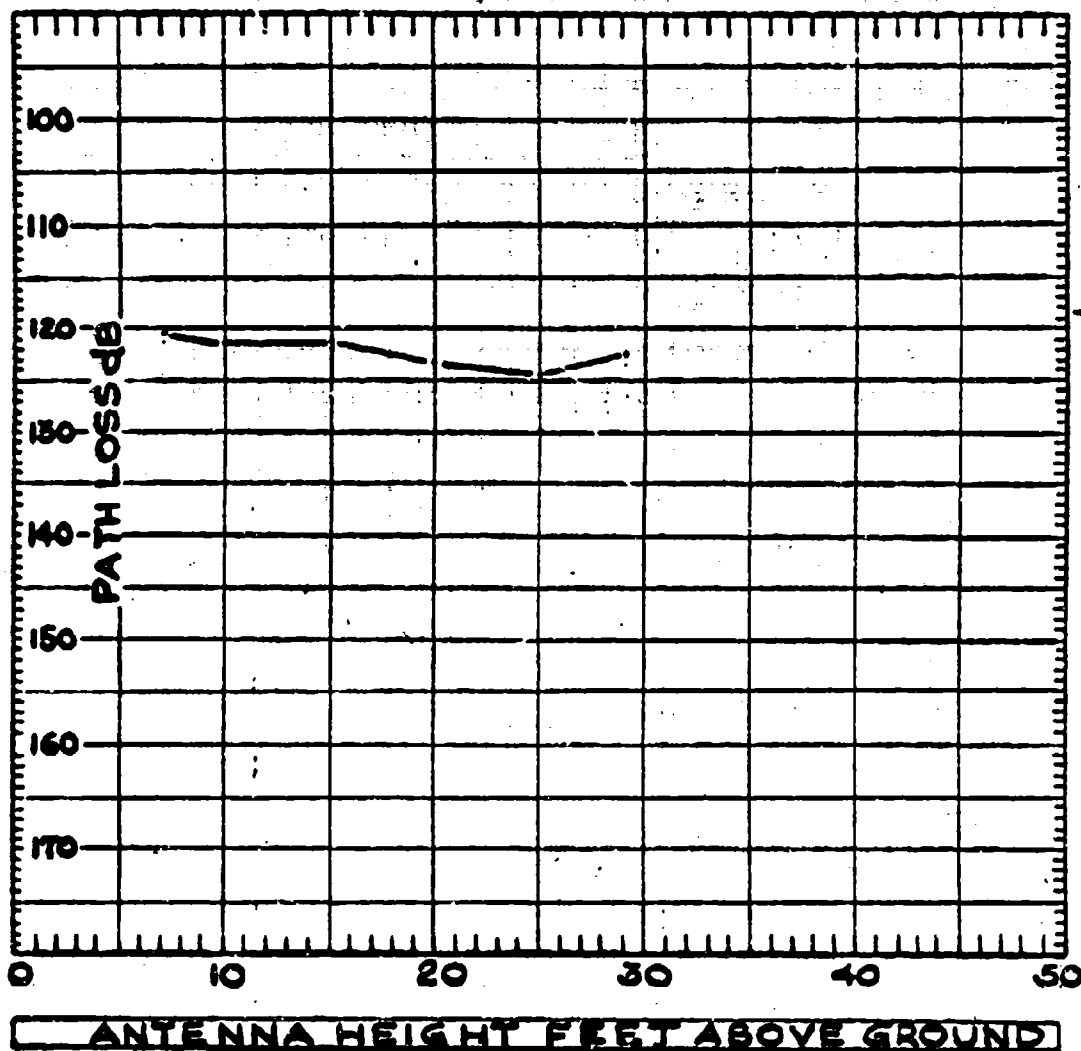


TEST DATA SHEET									
OPER. FREQ. <u>1545 MHz</u>		DATE: <u>31 JANUARY 72</u>		REC. SITE ANT. HT. <u>      </u> FT.		START: <u>1350</u> MRS.			
SITE	LOCATION	XMITR. PWR.	TYPE ANTENNA	ANT. GAIN (dB)	CABLE LOSSES (dB)	EQUIV. SYS. PWR. (ESP)	XMITR. PWR.	ANT. GAINS	
TRANSMITTER	HIGHLANDS 21	44 dB	AEI HORN	14.4	6.8		44		
RECEIVER	ECOM HEXAGON		ANDREW BICOGNAL	0.3	1.2			14.7	
TOTAL ANT. GAIN (XMITR + REC.)		14.4 + 0.3 =		14.7	dB			-TABLE LOSSES	8.0
TOTAL CABLE LOSS (XMITR + REC.)		6.8 + 1.2		8.0	dB			-ESP =	52.7 USE 51
XMITR. SITE HEIGHT ABOVE SEA LEVEL <u>200</u> FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL <u>195</u> FT.							
XMITR. ANT. HT. ABOVE GND (FT)	RCVD. PWR. (dBm)		PATH LOSS (dB) = (ESP) - (RCVD. PWR.)		AVG. PATH. LOSS (dB)	NO. OF SAMP	REMARKS		
	TEST	TEST	720131-01	720131-02					
7	69	69	720131-01	720131-02	120.2	6	WIND 4 KTS - 1 KTS		
10	70	71	120	122	121.8	6	GUSTING TO 9 KTS		
15	69	70	120	121	121.3	6	TEMP. -1°C.		
20	72	71	123	123	123.7	6			
25	74	74	125	123	124.7	6			
29	71	71	122	123	122.3	3			
25	74	74	125	125					
20	72	73	123	124					
15	70	71	121	121					
10	71	71	122	122					
7	69	70	120	121			END 720131-01 - 1410		
							START 720131-02 - 1420		
							END 720131-02 - 1435		
							START 720131-03 - 1450		
							END 720131-03 - 1520		

# PROPAGATION PATH LOSS

DATE: 31 JANUARY 72 TEST RUN S/N: 720131-04905  
PATH: HIGHLANDS SITE NO. 21 TO ECOM HEXAGON


OPER. FREQ.: 1545 MHz

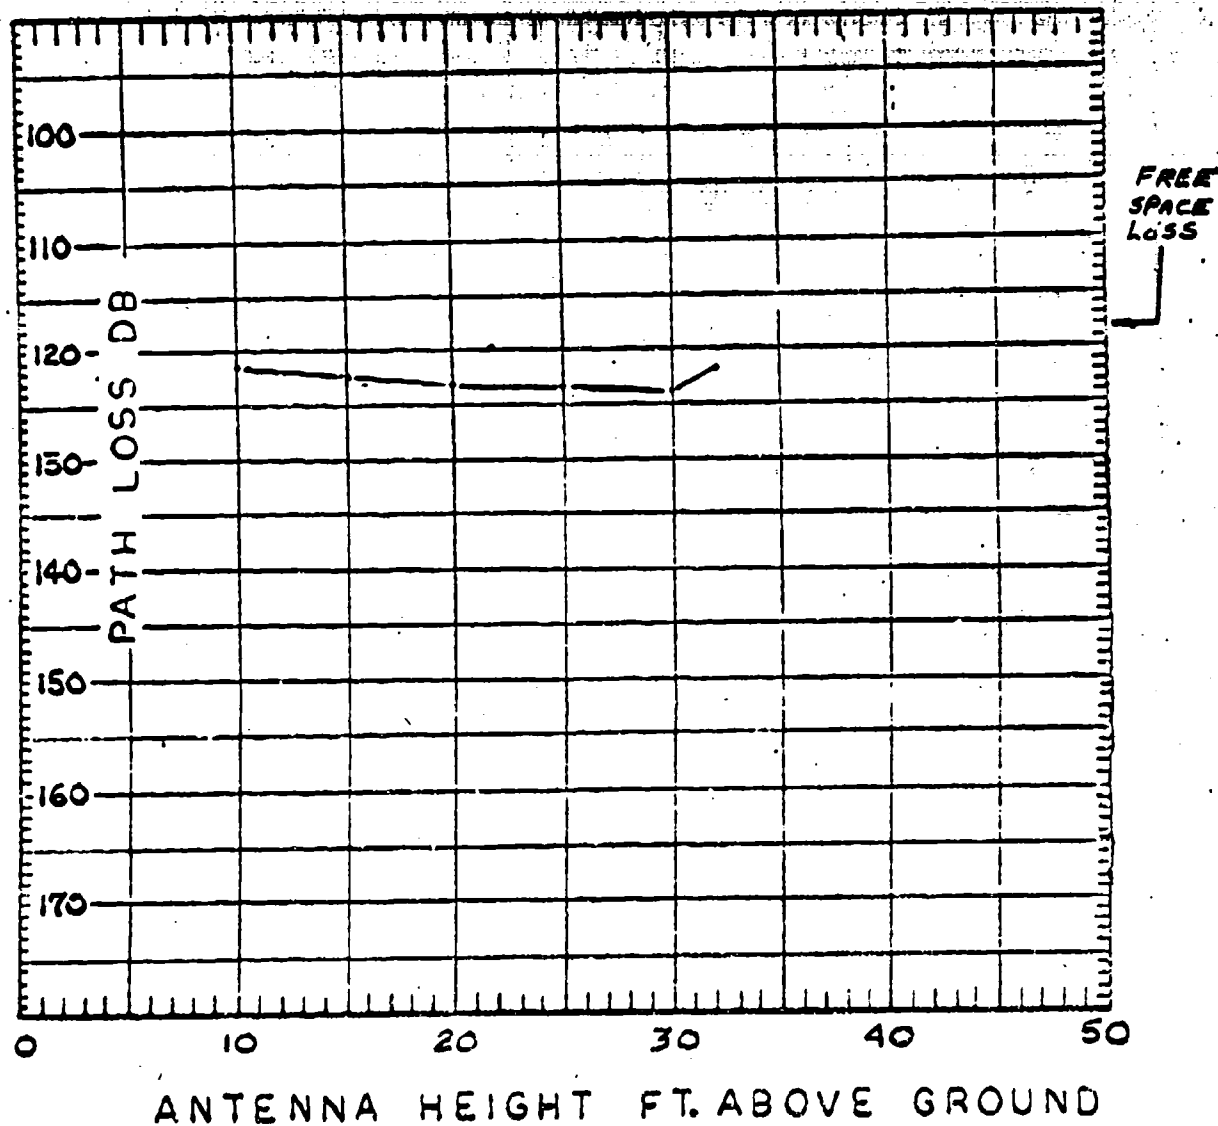



TEST RUN 6/N	AVERAGE PROPAGATION	FEB. 1972
720201-01	PATH LOSS HIGHLANDS	
-02 AND -03	SITE NO. 21 TO ECOM HERAGON	

FREQUENCY: 371.4 MHz

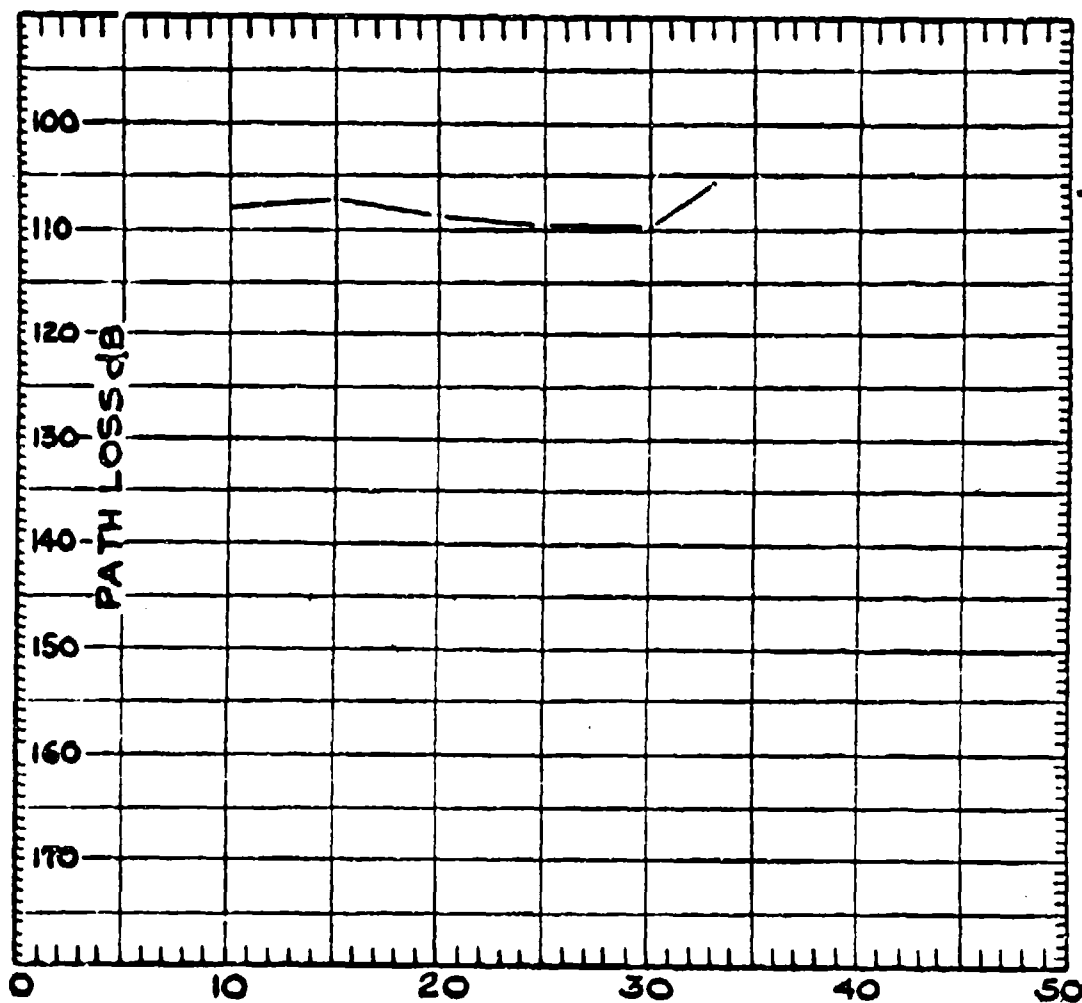


ANTENNA HEIGHT FEET ABOVE GROUND

TEST DATA SHEET											
OPER. FREQ.		371.4 MHz		DATE: 1 FEB. 1972		REC. SITE ANT. HT.		FT.		START: 0300 HRS.	
SITE		LOCATION		XMITR PWR.		TYPE ANTENNA		ANT. GAIN (dB)		CABLE LOSSES (dB)	
TRANSMITTER		HIGHLANDS 21		44		AT-197		2.0		2.6	
RECEIVER		ECOM 11. XAG-11		-		AT-197		2.0		2.3	
TOTAL ANT. GAIN (XMITR + REC.)		2.0 + 2.0 = 4.0		dB						-CABLE LOSSES 4.9	
TOTAL CABLE LOSS (XMITR + REC.)		2.6 + 2.3 = 4.9		dB						-ESP = 43.1 USE 43	
XMITR. SITE HEIGHT ABOVE SEA LEVEL		200		FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL		140		FT.	
XMITR. ANT. HT. ABOVE END (FT)	RCVD. PWR. (dBH)			PATH LOSS (dB) = (ESP) - (RCVD. PWR.)			AVG. PATH. LOSS (dB)	NO. OF SAMP	REMARKS		
	TEST	TEST	TEST	720201-01	720201-02	720201-03					
10'3"	65	64	65	108	107	108	108	6	WIND 3 KTS. 240° GUSTING TO 4 KTS. TEMP. 26°F.		
15	64	64	64	107	107	107	107	6			
20	65	65	66	108	108	109	108.5	6			
25	66	67	67	109	110	110	109.5	6			
30	66	67	66	109	110	109	109.7	6			
32'7"	62	63	63	105	106	106	105.7	3			
30	66	69	66	109	112	109					
25	65	68	67	108	110	110					
20	65	67	65	108	110	108					
15	64	64	64	107	107	107					
10'3"	64	67	65	107	110	108			END 720201-01 - 1000		
									START 720201-02 1005		
									END 720201-02 - 1035		
									START 720201-03 - 1042		
									END 720201-03 - 1057		

TEST RUN 8/N	AVERAGE PROPAGATION	FEB. 1972
720201-04	PATH LOSS HIGHLANDS	
AND 05	SITE NO. 2 TO ECOM HEXAGON	

FREQUENCY: 229.5 MHz

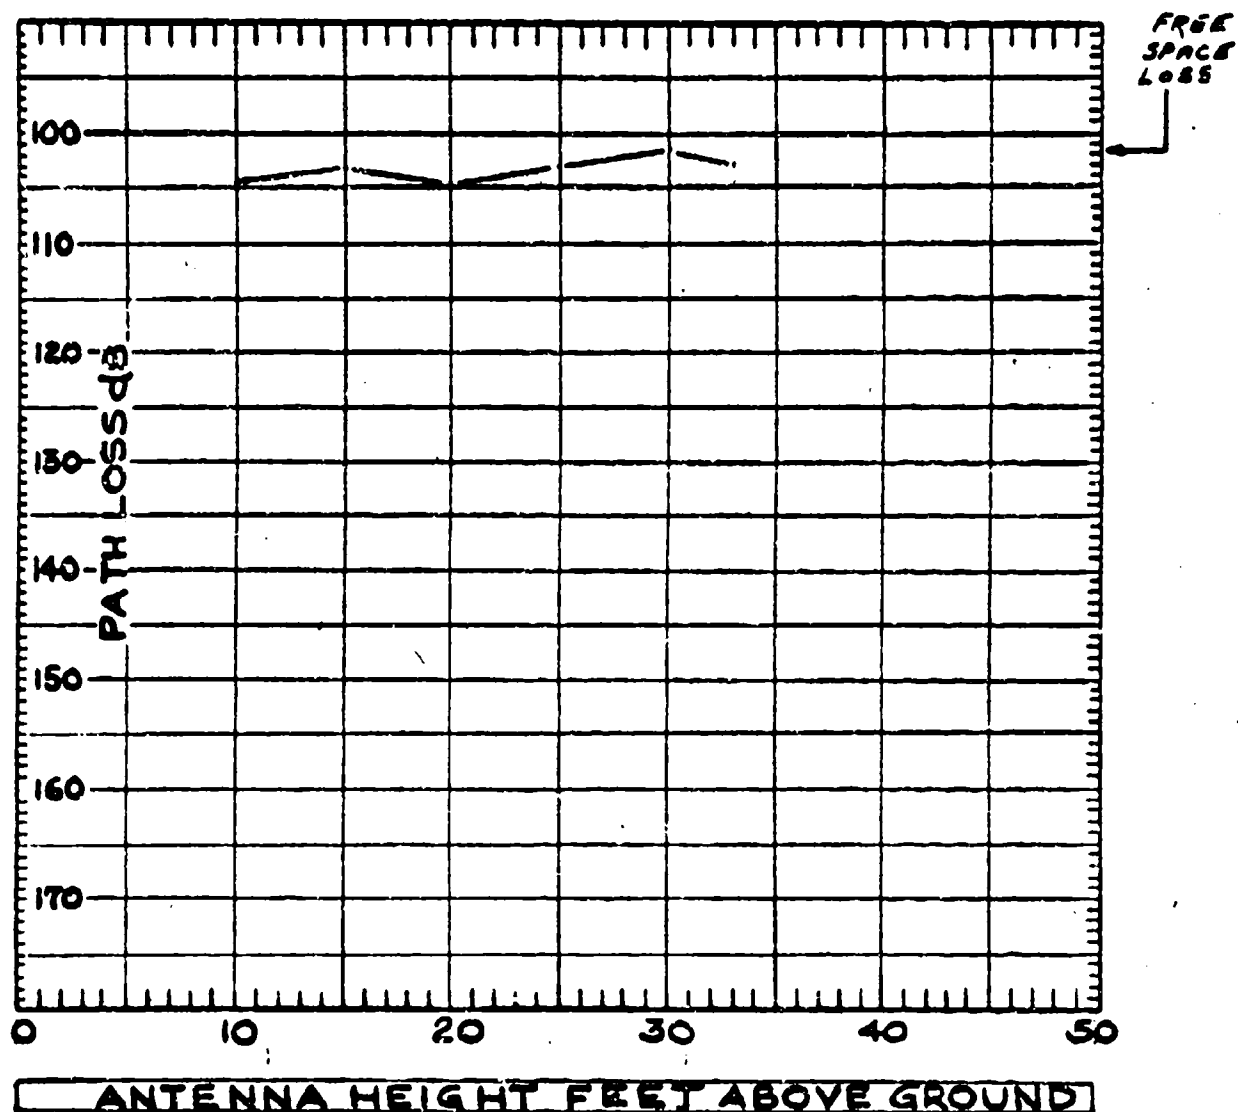






TEST RUN 3/N	AVERAGE PROPAGATION	FEB 72
720201-06	PATH LOSS HIGHLANDS	
SITE NO. 21 TO ECOP HEXAGON		

FREQUENCY: 1545 MHz

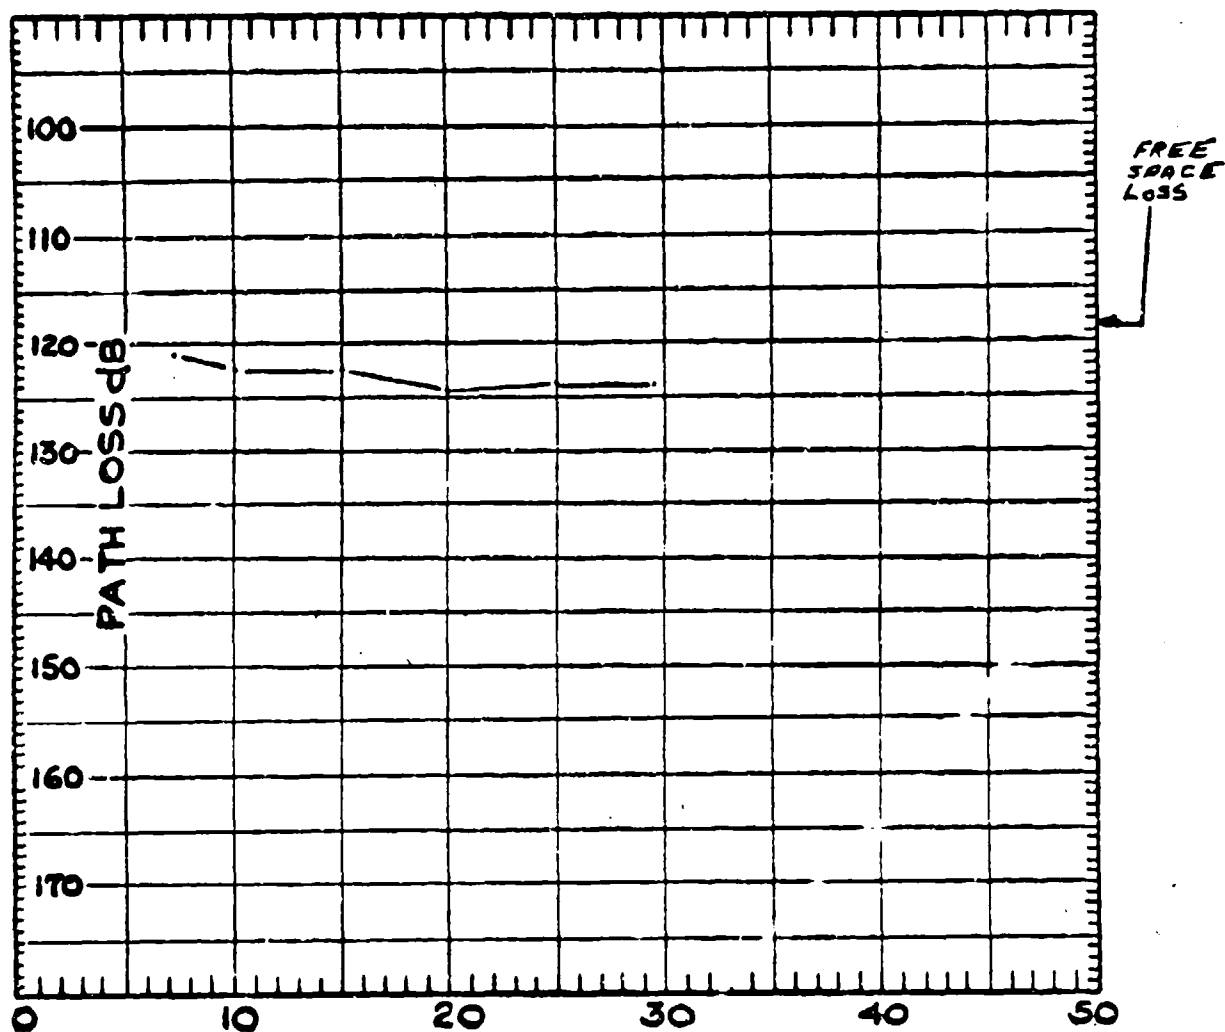


ANTENNA HEIGHT FEET ABOVE GROUND

TEST DATA SHEET									
OPER. FREQ.		1545 MHz		REC. SITE ANT. HT.		FT.		DATE: 1 FEB 1962	
START: 1330		HRS.							
SITE	LOCATION	XMITR. PWR.	TYPE ANTENNA	ANT. GAIN (dB)	CABLE LOSSES (dB)	EQUIV. SYS. PWR. (ESP)			
TRANSMITTER	HIGHLANDS 21	44.10W	AEL HORN	14.4	6.5	XMITR. PWR. 7.7			
RECEIVER	ECONOMEXAGON		ANDREW BICONICAL	0.3	1.2	+ANT. GAINS 14.7			
TOTAL ANT. GAIN (XMITR + REC.)		14.4 + 0.3 = 14.7		dB		-CABLE LOSSES 7.7			
TOTAL CABLE LOSS (XMITR + REC.)		6.5 + 1.2 = 7.7		dB		-ESP = 57.0			
XMITR. SITE HEIGHT ABOVE SEA LEVEL		200		FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL		155	
XMITR. ANT. HT. ABOVE GND (FT)	RCVD. PWR. (dBm)		PATH LOSS (dB) - (RCVD. PWR.)		AVG. PATH. LOSS (dB)	NO. OF SAMP	REMARKS		
	TEST	TEST	TEST	TEST					
7	70	—	—	—	121.0	2	WIND 2 KTS 270°		
10	71	—	—	—	122.5	2	GUSTING TO 7-20 KTS		
15	72	—	—	—	122.5	2			
20	74	—	—	—	124.5	2			
25	73	—	—	—	124.0	2			
29' 4"	73	—	—	—	124.0	1			
25	73	—	—	—					
20	73	—	—	—					
15	71	—	—	—					
10	72	—	—	—					
7	70	—	—	—			END 720201-06 - 1350		

PROPAGATION PATH LOSS  
DATE : 1 FEBRUARY 72 TEST RUN S/N: 720201-07-08  
PATH: HIGHLANDS SITE NO. 21 TO ECOM HEXAGON

OPER. FREQ. : 2290 MHz

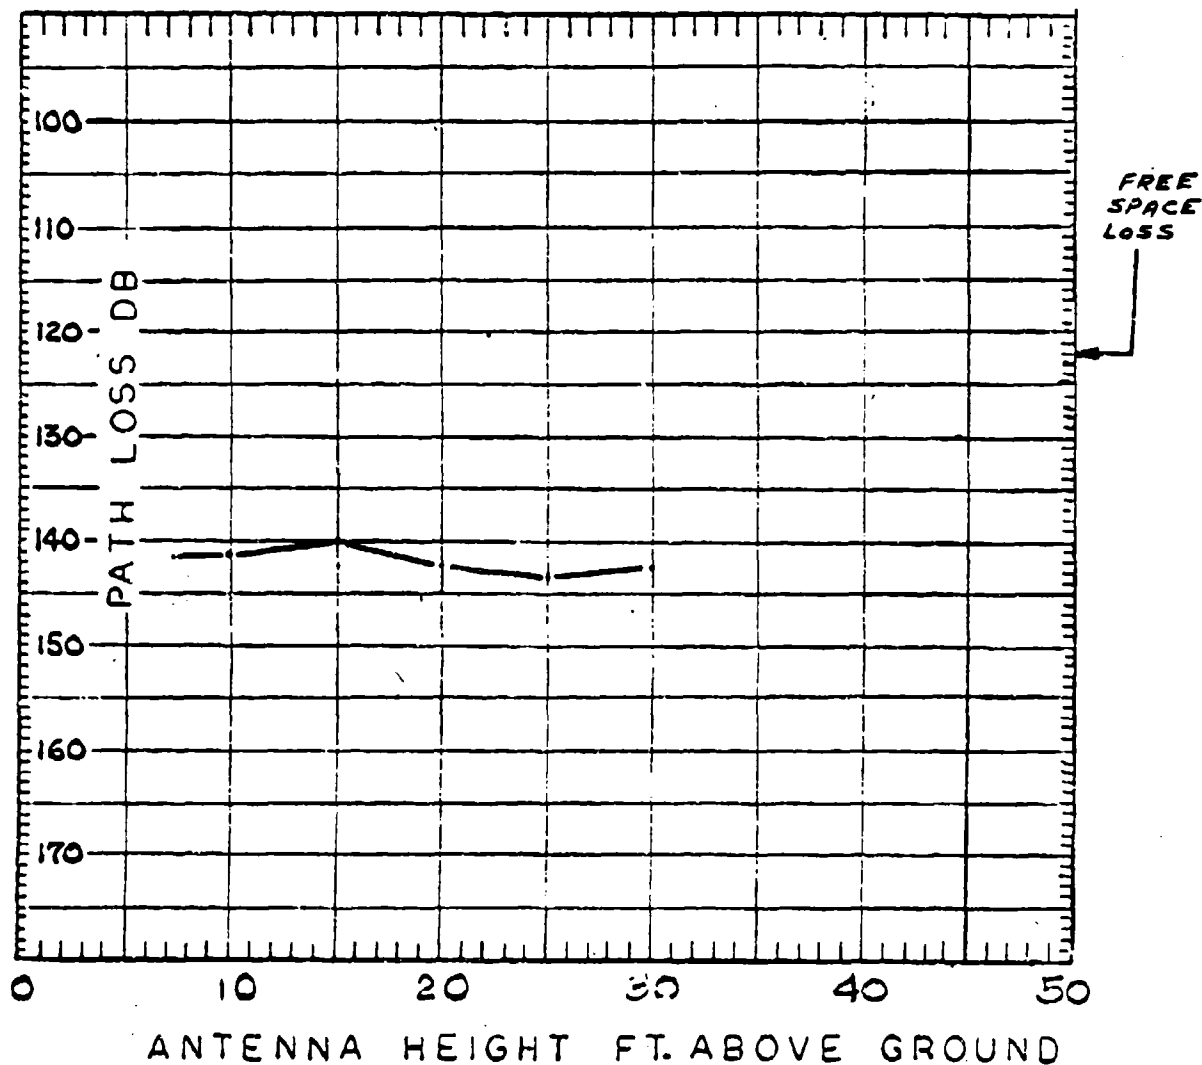

[illegible]


PROPAGATION PATH LOSS

DATE: 7 FEBRUARY 72 TEST RUN SN: 120207-03, -04

PATH: WAYSIDE SITE No. 19 TO ECOM HEXAGON

OPER. FREQ.: 229.5 MHz

FREE  
SPACE  
LOSS  
89.2  
dB

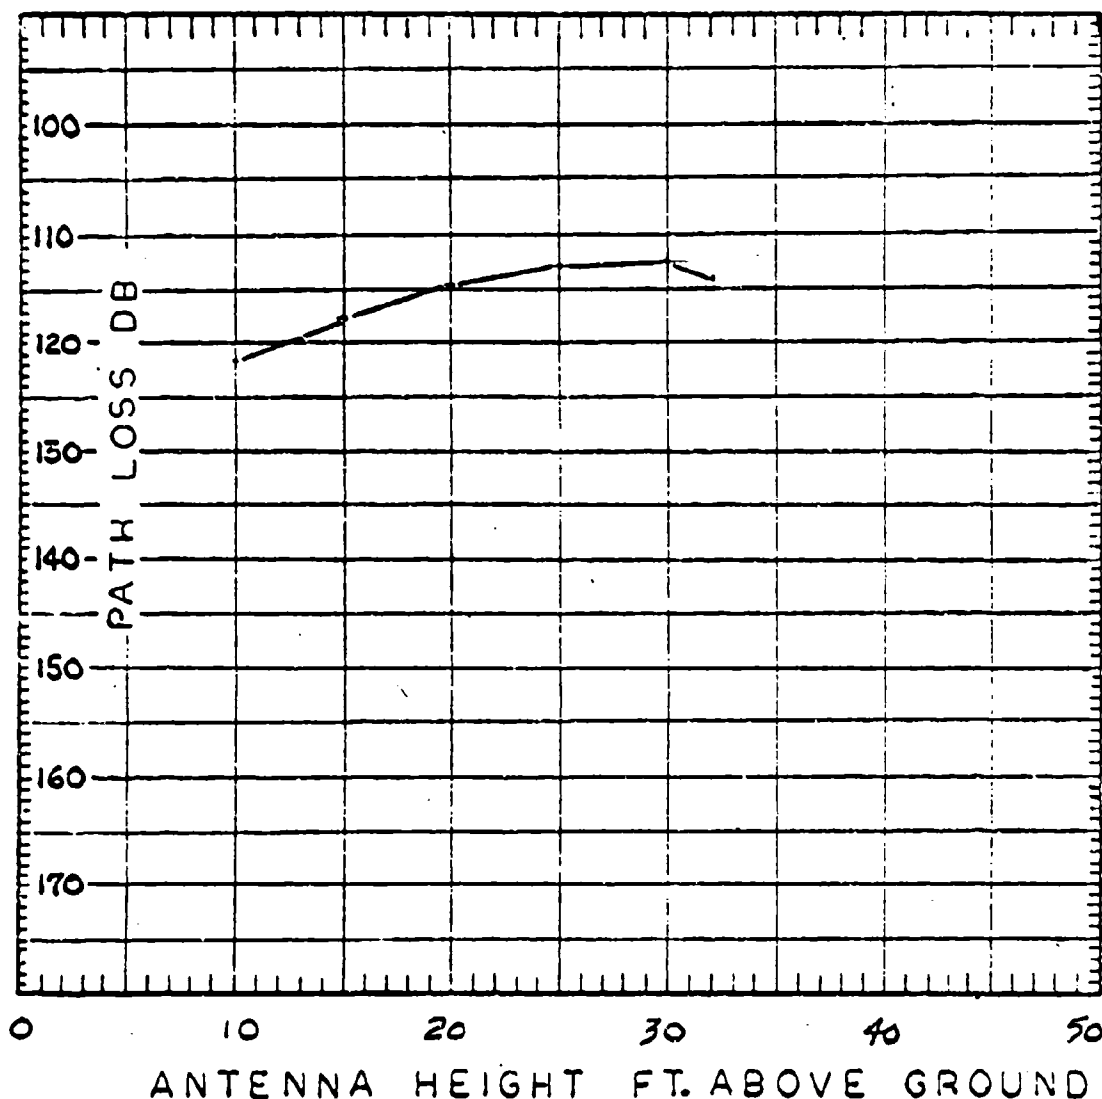


TEST DATA SHEET															
OPER. FREQ.		229.5 MHz		DATE: 7 FEBRUARY 72		HRS.		START: 1040							
SITE		LOCATION		REC. SITE ANT. HT.		FT.		EQUIV. SYS. PWR. (ESP)							
TRANSMITTER		WAYSIDE 19		TYPE ANTENNA		ANT. GAIN (dB)		CABLE LOSSES (dB)							
RECEIVER		ECONOMEX.		PWR.		17F-197		1.8							
TOTAL ANT. GAIN (XMT + REC.)		1.2 + 1.2 = 2.4		ANT. GAIN (dB)		1.2		1.8							
TOTAL CABLE LOSS (XMT + REC.)		1.8 + 1.8 = 3.6		RCVR. ANT. HEIGHT ABOVE SEA LEVEL		140		FT.							
XMT. ANT. HT. ABOVE GND (FT)		720207-03		XMT. ANT. HT. ABOVE SEA LEVEL		140		FT.							
XMT. ANT. HT. ABOVE GND (FT)		TEST		RCVD. PWR. (dBm)		TEST		PATH LOSS (dB) = (ESP) - (RCVD. PWR.)		AVG. PATH. LOSS (dB)		NO. OF SAMP		REMARKS	
10	79	77	720207-04	720207-03	720207-04	122	120	121.3	4						
15	75	74		118	117	117.5	4								
20	71	72		114	115	114.5	4								
25	69	70		112	113	113.0	4								
30	68	70		111	113	112.5	4								
32	71	71		114	114	114.0	2								
30	69	70		112	113										
25	71	70		114	113										
20	71	72		114	115										
15	75	74		118	117										
10	77	80		120	123										
END 720207-03 - 1057															
START 720207-04 - 1105															
END 720207-04 - 1120															

PROPAGATION PATH LOSS  
DATE : 7 FEBRUARY 72 TEST RUN S/N: 720207-01, -02  
PATH: WAYSIDE SITE NO. 19 TO ECOM HEXAGON

OPER. FREQ. : 371.4 MHz

FREE  
SPACE  
LOSS

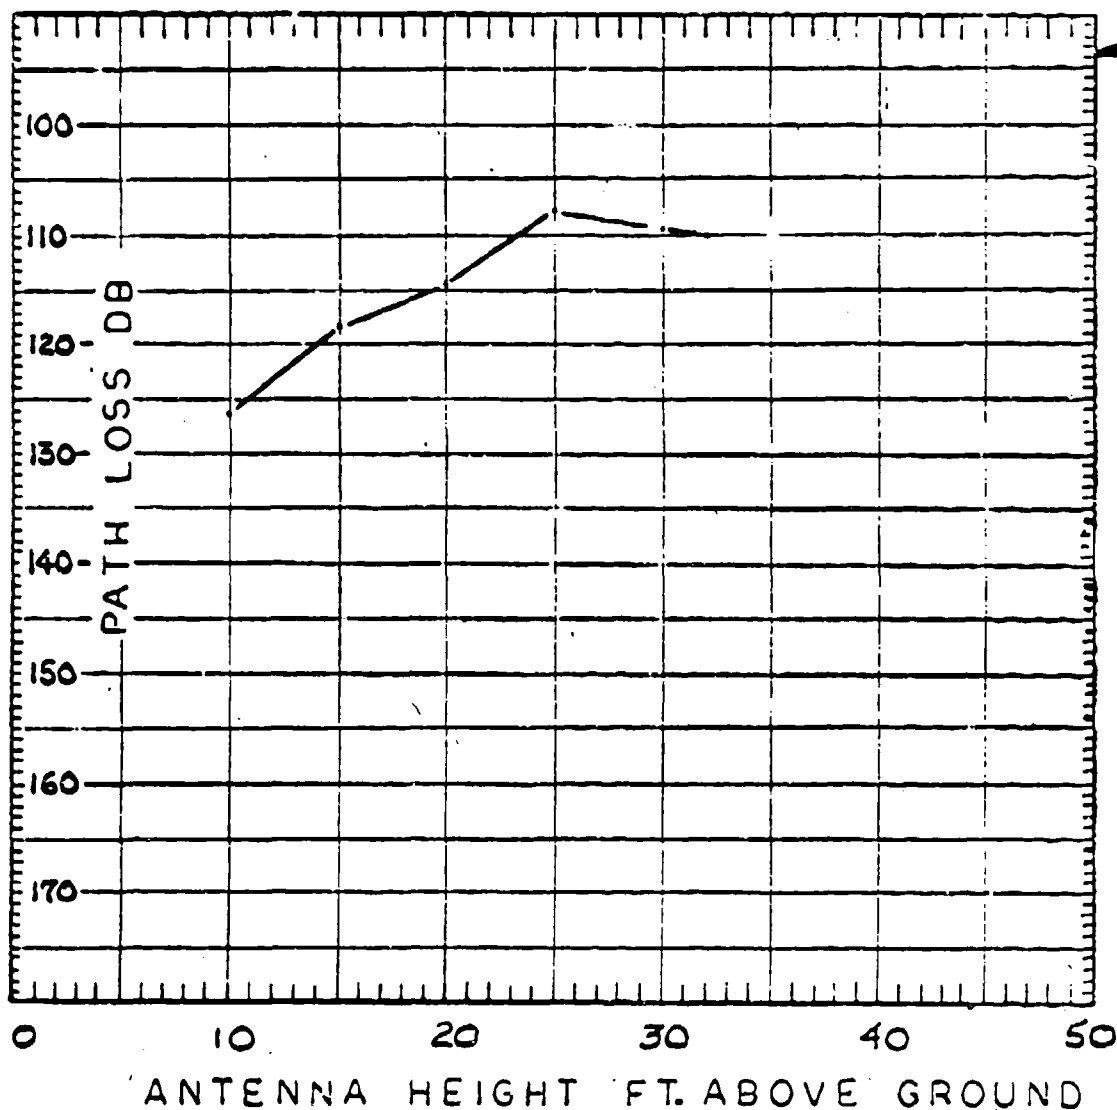




TEST DATA SHEET									
OPER. FREQ.		371.4		DATE: 7 FEBRUARY 72		REC. SITE ANT. HT.		FT.	
SITE		LOCATION		XMIT. PWR.		TYPE ANTENNA		ANT. GAIN (dB)	
TRANSMITTER		WAYSIDE 19		44 dBm		AT 197		2.0	
RECEIVER		ECOM HEX.				AT 197		2.0	
TOTAL ANT. GAIN (XMITR + REC.)		2.0 + 2.0 = 4.0		dB				dB	
TOTAL CABLE LOSS (XMITR + REC.)		2.3 + 2.3 = 4.6		dB				dB	
XMITR. SITE HEIGHT ABOVE SEA LEVEL		140		FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL		140	
XMITR. ANT. HT. ABOVE GND (FT)		TEST		TEST		TEST		REMARKS	
720207-01		720207-02		720207-01		720207-02			
10	83	85	126	128	126.3	4			
15	77	73	120	116	118.3	4			
20	70	73	113	116	114.8	4			
25	65	65	108	108	108.0	4			
30	66	66	109	109	109.5	4			
32	67	67	110	110	110.0	2			
30	67	67	110	110					
25	65	65	108	108					
20	70	74	113	117					
15	76	75	119	118					
10	83	82	126	125					
END 720207-01 - 1015									
START 720207-02 - 1020									
END 720207-02 - 1055									

# PROPAGATION PATH LOSS

DATE : 7 FEBRUARY 72 TEST RUN S/N: 720207-05, -06, -08

PATH: WAYSIDE SITE No. 19 TO ECOM HEXAGON

OPER. FREQ. : 1545 MHz

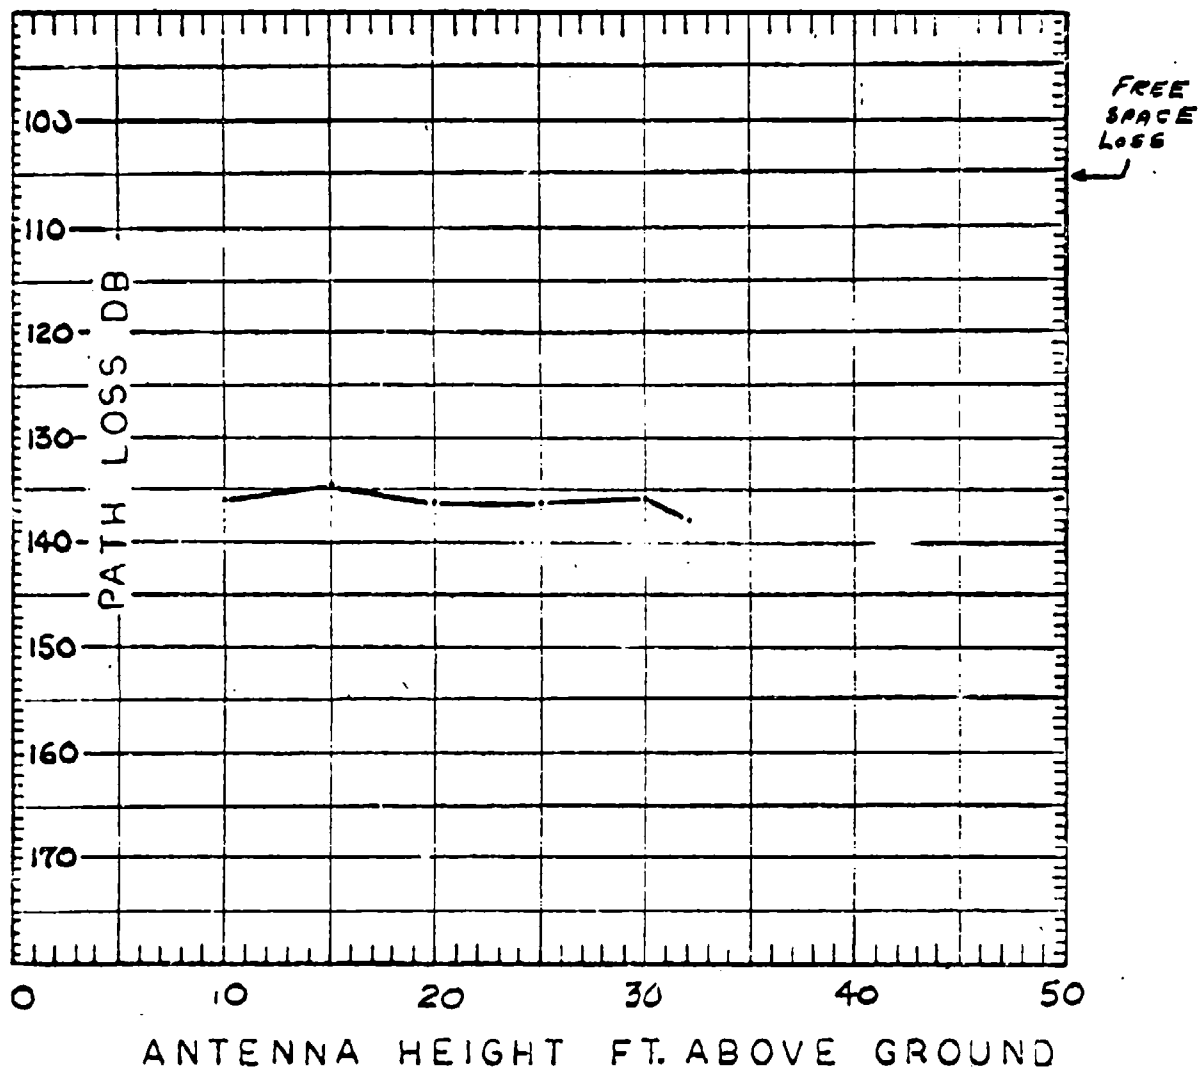

TEST DATA SHEET																																																																																																																	
OPKR. FREQ.		1545 MHz		DATE: 7 FEBRUARY 72		REC. SITE ANT. HT.		FT.																																																																																																									
SITE		LOCATION		TYPE		ANT. GAIN		CABLE LOSSES																																																																																																									
TRANSMITTER		WAYSIDE 19		ANTENNA		2.5		5.7																																																																																																									
RECEIVER		ECOM HEX.		ANTENNA		0.3		1.2																																																																																																									
TOTAL ANT. GAIN (XMTR + REC.)		2.5 + 0.3 = 2.8		dB																																																																																																													
TOTAL CABLE LOSS (XMTR + REC.)		5.7 + 1.2 = 6.9		dB																																																																																																													
XMTR. SITE HEIGHT ABOVE SEA LEVEL		140		FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL		145																																																																																																									
EQUIV. SYS. PWR. (ESP)						XMTR. PWR.		43																																																																																																									
+ ANT. GAINS								2.8																																																																																																									
- CABLE LOSSES								6.9																																																																																																									
= ESP =								38.9 USE 39																																																																																																									
<table border="1"> <thead> <tr> <th rowspan="2">XMTR. ANT. HT. ABOVE GND (FT)</th> <th colspan="2">RCVD. PWR. (dBm)</th> <th colspan="2">PATH LOSS (dB) = (ESP) - (RCVD. PWR.)</th> <th rowspan="2">AVG. PATH. LOSS (dB)</th> <th rowspan="2">NO. OF SAMP</th> <th rowspan="2">REMARKS</th> </tr> <tr> <th>TEST</th> <th>TEST</th> <th>720207-05</th> <th>720207-07</th> </tr> </thead> <tbody> <tr> <td>16</td> <td>97</td> <td>104</td> <td>196</td> <td>143</td> <td>136.1</td> <td>6</td> <td rowspan="5">RUN 720207-07 COND. T.I.D. WITH ANTENNA AT 75' IN BRUNES TOWER TO CHECK PREVIOUS RESULTS NO MEASUREMENTS TAKEN</td> </tr> <tr> <td>15</td> <td>93</td> <td>97</td> <td>132</td> <td>136</td> <td>134.8</td> <td>6</td> </tr> <tr> <td>20</td> <td>100</td> <td>100</td> <td>139</td> <td>139</td> <td>136.5</td> <td>6</td> </tr> <tr> <td>25</td> <td>100</td> <td>100</td> <td>139</td> <td>139</td> <td>136.5</td> <td>6</td> </tr> <tr> <td>30</td> <td>100</td> <td>97</td> <td>139</td> <td>136</td> <td>136.0</td> <td>6</td> </tr> <tr> <td>32</td> <td>102</td> <td>100</td> <td>141</td> <td>139</td> <td>138.0</td> <td>3</td> <td></td> </tr> <tr> <td>30</td> <td>100</td> <td>95</td> <td>139</td> <td>134</td> <td></td> <td></td> <td>AVG. PATH LOSS INCLUDES RUNS 720207-05, 720207-06 AND 720207-08</td> </tr> <tr> <td>25</td> <td>98</td> <td>97</td> <td>137</td> <td>136</td> <td></td> <td></td> <td>END 720207-05 - 1330</td> </tr> <tr> <td>20</td> <td>97</td> <td>99</td> <td>136</td> <td>138</td> <td></td> <td></td> <td>START 720207-06 - 1400</td> </tr> <tr> <td>15</td> <td>96</td> <td>97</td> <td>135</td> <td>136</td> <td></td> <td></td> <td>END 720207-06 - 1420</td> </tr> <tr> <td>10</td> <td>96</td> <td>95</td> <td>135</td> <td>134</td> <td></td> <td></td> <td>START 720207-07 - 1445</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>END 720207-07 - 1500</td> </tr> </tbody> </table>										XMTR. ANT. HT. ABOVE GND (FT)	RCVD. PWR. (dBm)		PATH LOSS (dB) = (ESP) - (RCVD. PWR.)		AVG. PATH. LOSS (dB)	NO. OF SAMP	REMARKS	TEST	TEST	720207-05	720207-07	16	97	104	196	143	136.1	6	RUN 720207-07 COND. T.I.D. WITH ANTENNA AT 75' IN BRUNES TOWER TO CHECK PREVIOUS RESULTS NO MEASUREMENTS TAKEN	15	93	97	132	136	134.8	6	20	100	100	139	139	136.5	6	25	100	100	139	139	136.5	6	30	100	97	139	136	136.0	6	32	102	100	141	139	138.0	3		30	100	95	139	134			AVG. PATH LOSS INCLUDES RUNS 720207-05, 720207-06 AND 720207-08	25	98	97	137	136			END 720207-05 - 1330	20	97	99	136	138			START 720207-06 - 1400	15	96	97	135	136			END 720207-06 - 1420	10	96	95	135	134			START 720207-07 - 1445								END 720207-07 - 1500
XMTR. ANT. HT. ABOVE GND (FT)	RCVD. PWR. (dBm)		PATH LOSS (dB) = (ESP) - (RCVD. PWR.)		AVG. PATH. LOSS (dB)	NO. OF SAMP	REMARKS																																																																																																										
	TEST	TEST	720207-05	720207-07																																																																																																													
16	97	104	196	143	136.1	6	RUN 720207-07 COND. T.I.D. WITH ANTENNA AT 75' IN BRUNES TOWER TO CHECK PREVIOUS RESULTS NO MEASUREMENTS TAKEN																																																																																																										
15	93	97	132	136	134.8	6																																																																																																											
20	100	100	139	139	136.5	6																																																																																																											
25	100	100	139	139	136.5	6																																																																																																											
30	100	97	139	136	136.0	6																																																																																																											
32	102	100	141	139	138.0	3																																																																																																											
30	100	95	139	134			AVG. PATH LOSS INCLUDES RUNS 720207-05, 720207-06 AND 720207-08																																																																																																										
25	98	97	137	136			END 720207-05 - 1330																																																																																																										
20	97	99	136	138			START 720207-06 - 1400																																																																																																										
15	96	97	135	136			END 720207-06 - 1420																																																																																																										
10	96	95	135	134			START 720207-07 - 1445																																																																																																										
							END 720207-07 - 1500																																																																																																										

TEST DATA SHEET									
OPER. FREQ.		1545 MHz		DATE: 7 FEBRUARY 72		FT.		HRS.	
SITE		LOCATION		REC. SITE ANT. HT.		FT.		HRS.	
TRANSMITTER			WAYSIDE 19	XMIT. PWR.	43 dBm	TYPE ANTENNA	ANDREW'S DISCONE	ANT. GAIN (dB)	2.5
RECEIVER			ECOM Hex.	XMIT. PWR.		TYPE ANTENNA	ANDREW'S DISCONE	ANT. GAIN (dB)	0.3
TOTAL ANT. GAIN (XMITR + REC.)		2.5 + 0.3 = 2.8		dB					
TOTAL CABLE LOSS (XMITR + REC.)		5.7 + 1.2 = 6.9		dB					
XMITR. SITE HEIGHT ABOVE SEA LEVEL		140 FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL		145 FT.			
XMITR. ANT. HT. ABOVE GND (FT)	RCVD. PWR. (dBm)		PATH LOSS (dB) = (ESP) - (RCVD. PWR.)		AVG. PATH. LOSS (dB)	NO. OF SAMPL	REMARKS		
	TEST	TEST	TEST	TEST					
10	96		1202.708				AVG. PATH LOSS INCLUDED WITH RUNS 720207-05 AND 720207-06		
15	95								
20	94								
25	95								
30	95								
32	95								
30	95								
25	95								
20	95								
15	97								
10	95								


TEST DATA SHEET									
OPER. FREQ.		1545 MHz		DATE: 7 FEBRUARY 72		START: 1445 HRS.		FT.	
REC. SITE ANT. HT.		FT.		ANT. GAIN (dB)		CABLE LOSSES (dB)		EQUIV. SYS. PWR. (ESP)	
TRANSMITTER		WAYSIDE 19		43 dBm		REL HORN		14.4	
RECEIVER		ECOM HEX.				ANTENNA		0.3	
TOTAL ANT. GAIN (XMT + REC.)		14.4 + 0.3 = 14.7		dB					
TOTAL CABLE LOSS (XMT + REC.)		5.7 + 1.2 = 6.9		dB					
XMT. SITE HEIGHT ABOVE SEA LEVEL		140		FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL		115	
XMT. ANT. HT. ABOVE GND (FT)		10				NO. OF SAMP			
RCVD. PWR. (dBm)		TEST		TEST		AVG. PATH. LOSS (dB)		REMARKS	
72207.07		72207.07		72207.07				* 15 MINUTE RUN	
*		*		*				ENDING 1548	
								RCVD POWER	
								WAS A LOW OF	
								20dB AND A HIGH	
								OF 25dB NO. AVG.	
								PATH LOSS CALCULATED	

# PROPAGATION PATH LOSS

DATE: 8 FEB 72 TEST RUN S/N: 720208.01402

PATH: WAYSIDE 19 TO ECOM HEXAGON

OPER. FREQ.: 1545 MHz

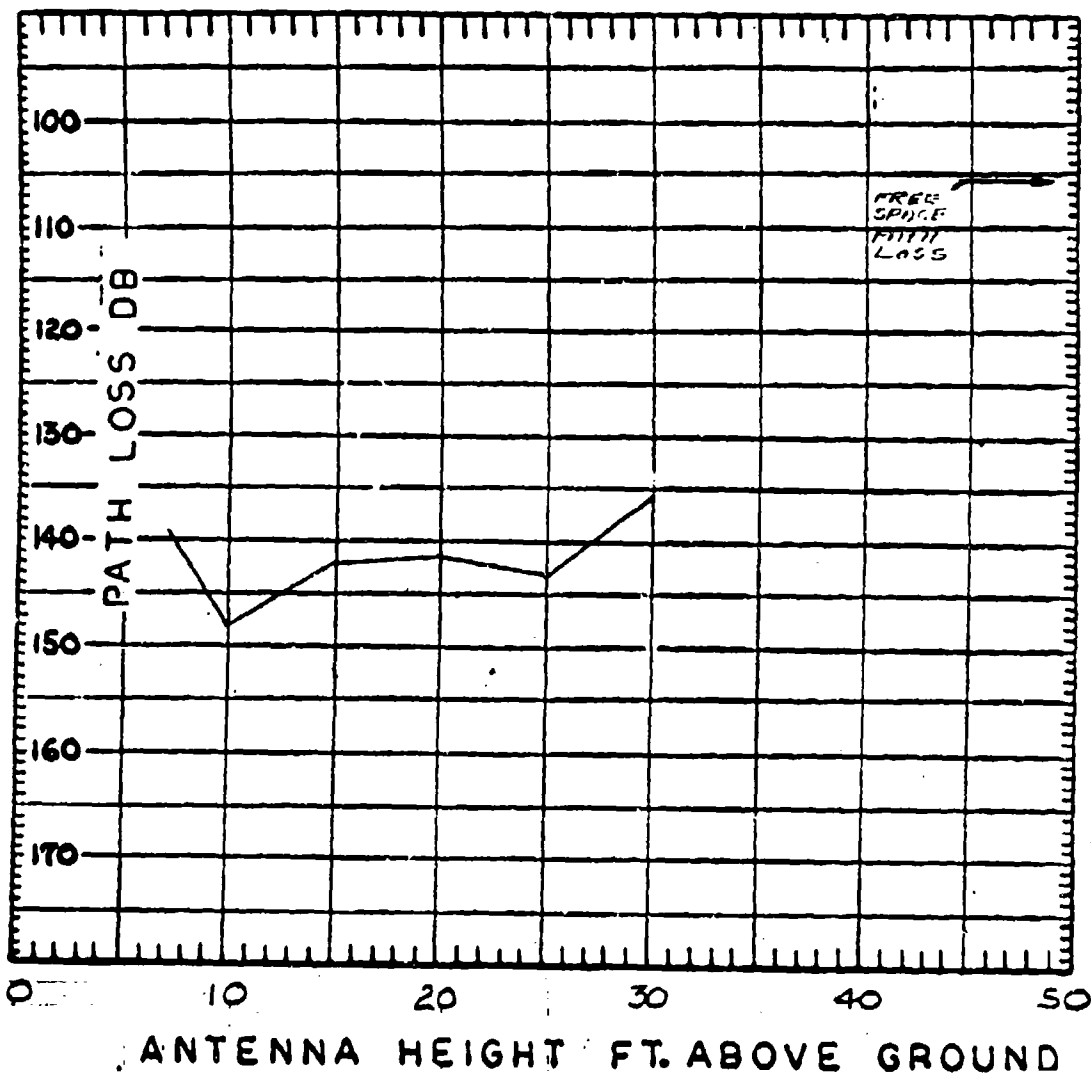


TEST DATA SHEET									
OPER. FREQ.		154W MHz		DATE: 8 FEB 72		START: _____		MRS.	
SITE		LOCATION		REC. SITE ANT. HT.		FT.		EQUIV. SYS. PWR. (ESP)	
TRANSMITTER		WRYSIDE 19		XMT. PWR.		44 dB		XMT. PWR. 44	
RECEIVER		ECOM HEX		ANT. GAIN (dB)		19.4		CABLE LOSSES (dB) 5.7	
TOTAL ANT. GAIN (XMT + REC.)		14.4 + 0.3 =		14.7 dB		0.3		+ANT. GAINS 14.7	
TOTAL CABLE LOSS (XMT + REC.)		5.7 + 1.2 =		6.9 dB		1.2		-CABLE LOSSES 6.7	
XMT. SITE HEIGHT ABOVE SEA LEVEL		140 FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL		140 FT.		-ESP = 5.7 + 0.3 = 5.2	
XMT. ANT. HT. ABOVE GND (FT)		RCVD. PWR. (dBm)		PATH LOSS (dB) = (ESP) - (RCVD. PWR.)		AVG. PATH. LOSS (dB)		NO. OF SAMP.	
TEST		TEST		TEST		TEST		TEST	
7'3"	88	720208.01	720208.02	140	139	139.5	4		
10	99	720208.01	720208.02	151	147	148	4		
15	84	720208.01	720208.02	136	136	137	4		
20	84	720208.01	720208.02	136	137	136.5	4		
25	85	720208.01	720208.02	137	138	138	4		
30	84	720208.01	720208.02	136	135	135.5	2		
25	85	720208.01	720208.02	137	139				
20	84	720208.01	720208.02	136	137				
15	84	720208.01	720208.02	136	138				
10	95	720208.01	720208.02	147	147				
7'3"	87	720208.01	720208.02	139	140				
Pos. PEAK AVERAGING OF STRIP CHART RECORDINGS									

PROPAGATION PATH LOSS

DATE: 8 FEB. 72 TEST RUN S/N: 720208.03 '04

PATH: WAYSIDE 19 TO ECOM HEXAGON

OPER. FREQ.: 1545 MHz

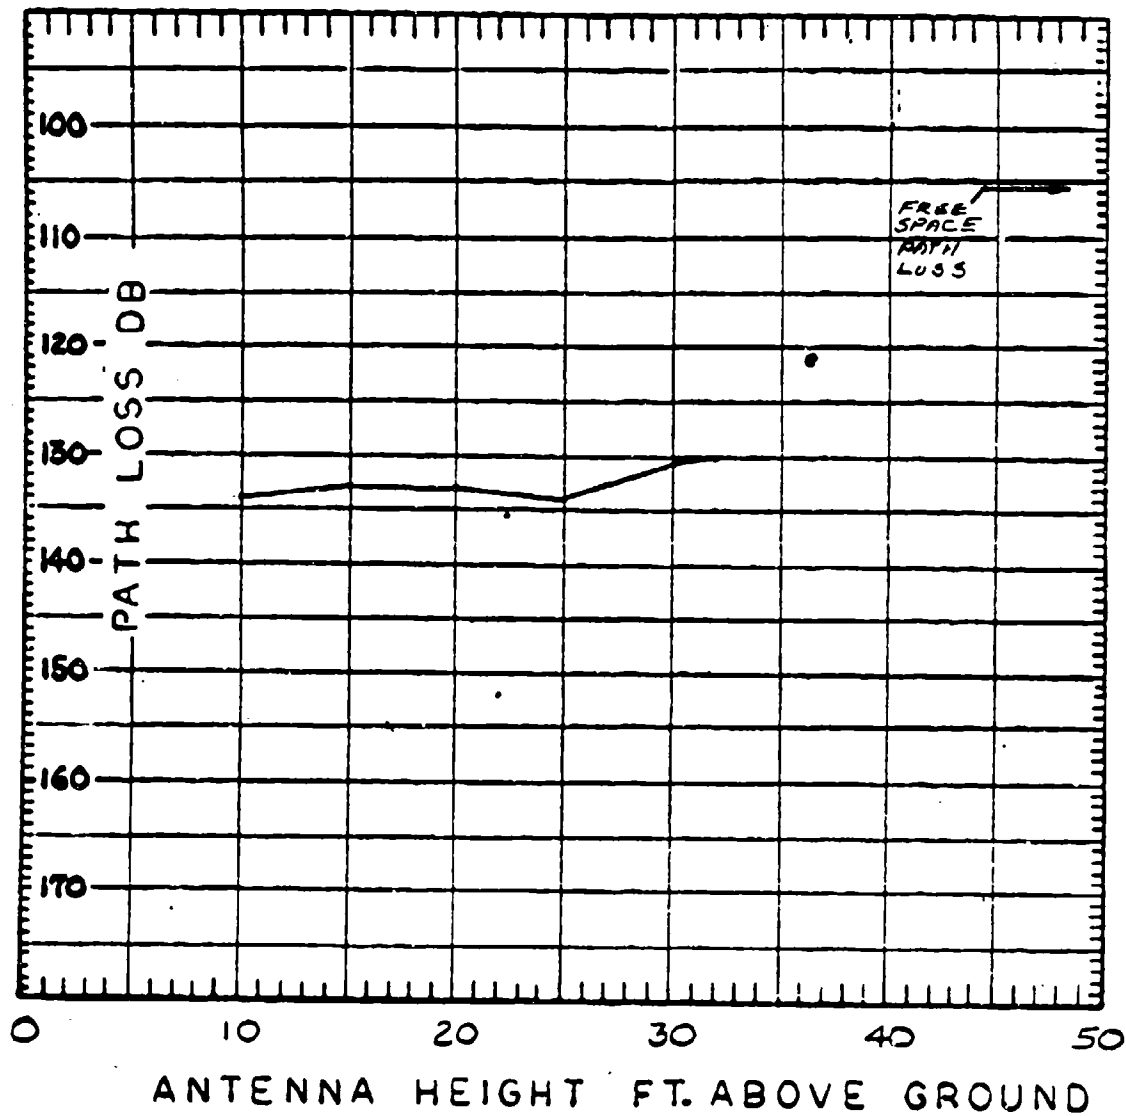



TEST DATA SHEET									
OPER. FREQ.		154.5 MHz		REC. SITE ANT. HT.		FT.		DATE: 8 FEB 72	
TIME		1400		START:		HRS.			
SITE	LOCATION	XMTR PWR.	TYPE ANTENNA	ANT. GAIN (dB)	CABLE LOSSES (dB)	EQUIV. SYS. PWR. (ESP)			
TRANSMITTER	WAYSIDE 19	44 dBm	ANDREW DISCONE	2.5	5.7	XMTR. PWR. 94			
RECEIVER	ECOM HEX.		ANDREW BICONICAL	0.3	1.2	+ ANT. GAINS 2.8			
TOTAL ANT. GAIN (XMTR + REC.)		2.5 + 0.3 = 2.8		dB		- CABLE LOSSES 6.9			
TOTAL CABLE LOSS (XMTR + REC.)		5.7 + 1.2 = 6.9		dB		= ESP = 39.9 dB	40		
XMTR. SITE HEIGHT ABOVE SEA LEVEL		140		FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL		140	
XMTR. ANT. HT. ABOVE GND (FT)	RCVD. PWR. (dBm)	TEST	TEST	TEST	TEST	PATH LOSS (dB) = (ESP) - (RCVD. PWR.)	AVG. PATH. LOSS (dB)	NO. OF SAMP.	REMARKS
10	72.208.03	72.208.03	72.208.04	72.208.03	72.208.04	135.7	131.3	4	
15	95.7	91.3	89.8	136.3	129.8	134.8	133.5	4	
20	96.3	92.3	91.5	131.6	132.3	131.4	131.5	4	
25	91.6	91.4	87.3	131.6	127.3	129.9	131.4	2	
30	91.4	89.9	91.7	134.3	135.9	131.3	133.0		
32	91.6	91.3	93.0	134.1	133.3	132.4	137.0		
30	91.3	94.1	97.0						
25	94.3								
20	91.3								
15	94.1								
10	92.4								

POS. PEAK AVERAGING  
 OF STRIP CHART RECORDINGS


Pos. LEAK AVERAGING  
OF STRIP CHART RECORDINGS

# PROPAGATION PATH LOSS

DATE : 8 FEBRUARY 72 TEST RUN S/N: 720208-06, 07, 08

PATH : WAYSIDE SITE No. 19B TO ECOM HEXAGON

OPER. FREQ. : 154.5 MHz

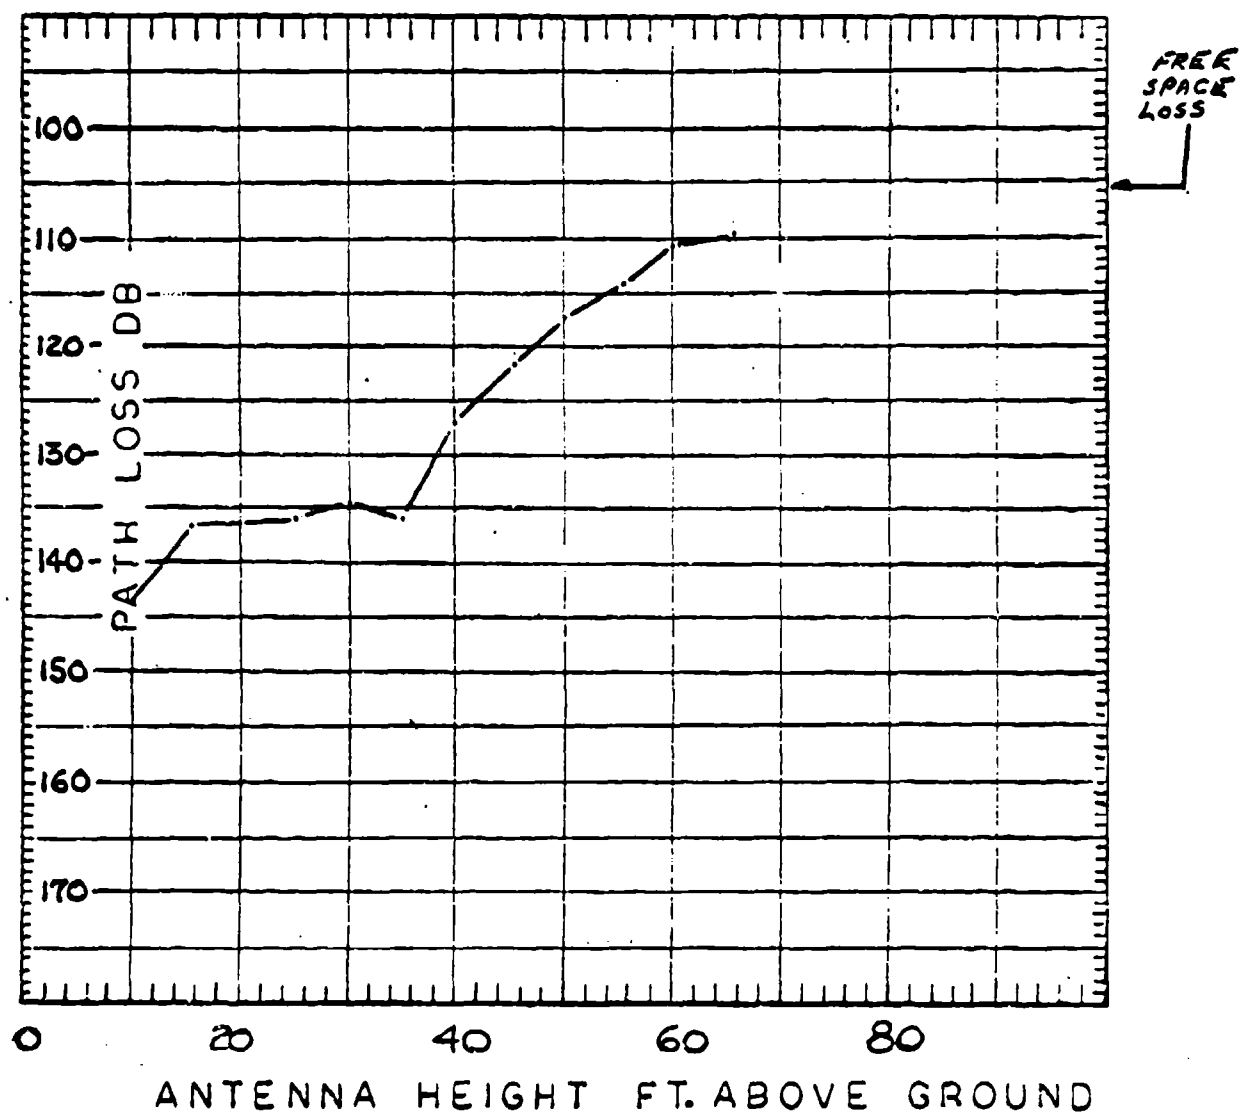

TEST DATA SHEET									
OPER. FREQ.		1545 MHz		DATE: 8 FEBRUARY 72		START: 1405		FT.	
SITE		LOCATION		REC. SITE ANT. HT.		ANT. GAIN (dB)		CABLE LOSSES (dB)	
TRANSMITTER		WINSIDE 19B		XMT. PWR. 44 dBm		TYPE ANTENNA REL. HOR. V.		EQUIV. SYS. PWR. (ESP)	
RECEIVER		ECOM HLEX.		XMT. PWR. 44 dBm		ANT. GAIN 14.4		XMT. PWR. 44.0	
TOTAL ANT. GAIN (XMT + REC.)		14.4 + 0.3 = 14.7		ANT. GAIN 0.3		CABLE LOSSES 1.2		+ ANT. GAINS 14.7	
TOTAL CABLE LOSS (XMT + REC.)		5.7 + 1.2 = 6.9		RCVR. ANT. HEIGHT ABOVE SEA LEVEL 140		FT.		- CABLE LOSSES 6.9	
XMT. SITE HEIGHT ABOVE SEA LEVEL		140		FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL 140		FT.	
XMT. ANT. HT. ABOVE GND (FT)		RCVD. PWR. (dBm)		PATH LOSS (dB) = (ESP) - (RCVD. PWR.)		AVG. PATH. LOSS (dB)		NO. OF SAMP	
TEST		TEST		TEST		TEST		TEST	
10	93	720208.06	720208.07	720208.08	720208.09	145	141	143	4
15	87	83	87	87	87	139	135	139	4
20	87	85	82	82	82	139	137	134	4
25	82	79	77	77	77	134	131	129	4
30	79	78	76	76	76	131	130	128	4
35	79	79	79	79	79	129	131	131	4
40	76	74	74	74	74	128	126	126	4
45	70	70	70	69	69	122	122	121	4
50	65	65	65	65	65	117	117	117	3
55	62	63	63	64	64	114	115	116	4
60	59	59	59	59	59	111	111	111	4
65	57	58	58	58	58	109	110	110	3
70	58	58	58	58	58	110	110	110	3
75	63	63	63	64	64	115	115	115	3
80	66	66	66	66	66	118	118	118	3
85	70	70	70	70	70	122	122	122	3
90	76	76	76	76	76	128	128	128	3
95	79	79	79	79	79	131	131	131	3
100	78	78	78	78	78	130	130	130	3
21	78	78	78	78	78	130	130	130	3


REMARKS

TRACKING TESTS  
WITH ANT. IN BRUNES  
TOWERCABLE PROBLEMS  
RUN 720208-08MEAN READING OF STRIP  
CHART RECORDING



PROPAGATION PATH LOSS  
DATE : 9 FEBRUARY 72 TEST RUN S/N: 720209-07-08  
PATH : WAYSIDE SITE NO. 19B TO ECOM HEXAGON

OPER. FREQ. : 371.4 MHz

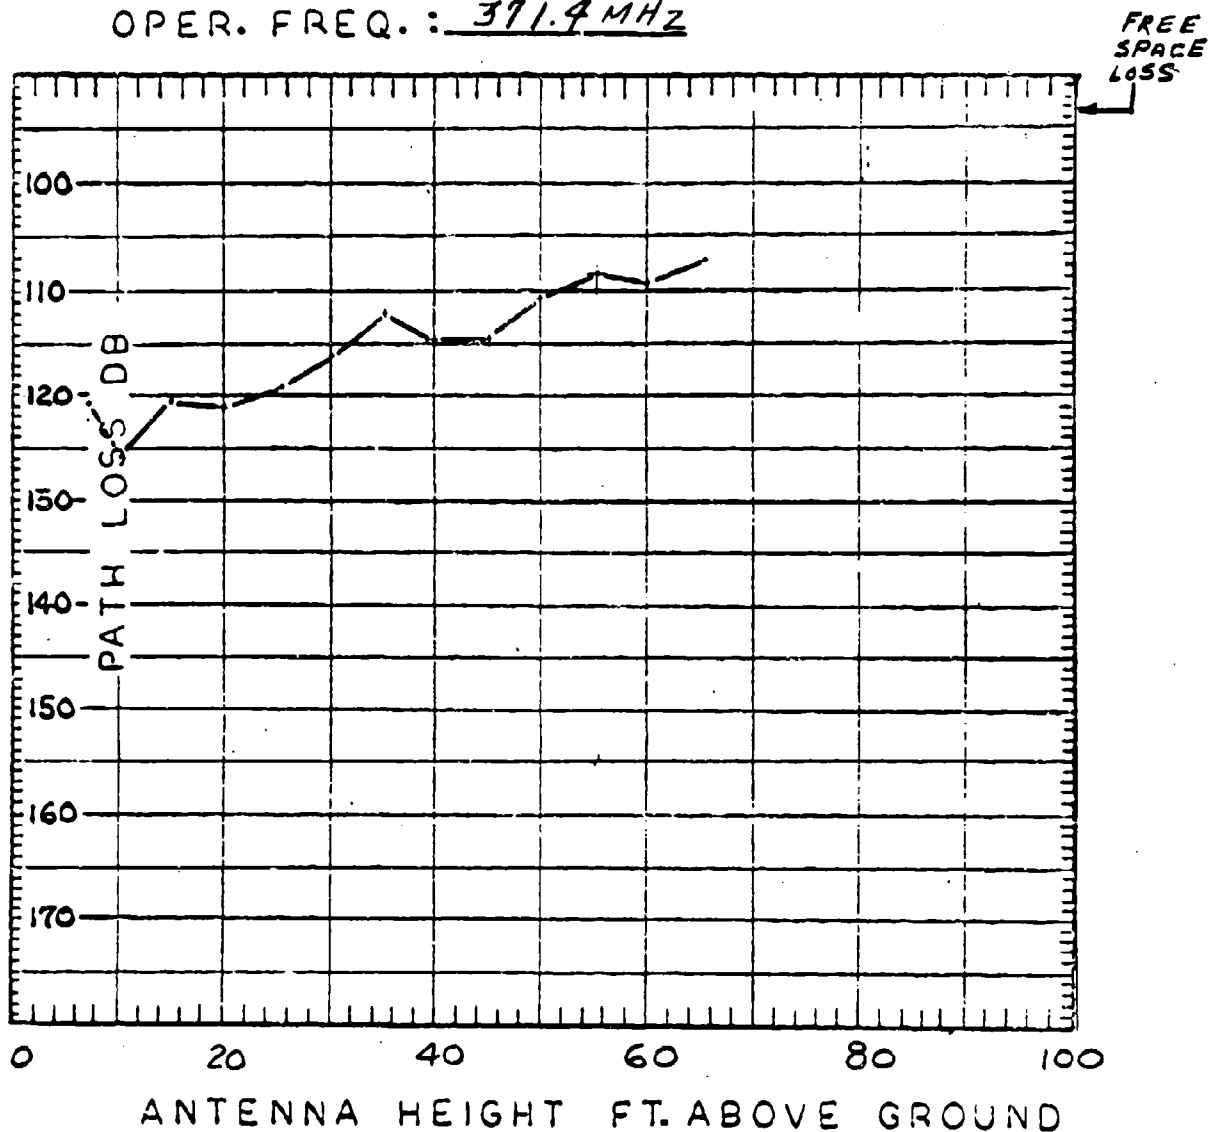


TEST DATA SHEET									
OPER. FREQ.		371.4 MHz		DATE: 9 FEBRUARY 72		START: 1538 HRS.		FT.	
SITE		LOCATION		REC. SITE ANT. HT.		ANT. GAIN (dB)		CABLE LOSSES (dB)	
TRANSMITTER		WAYSIDE 19B		49dBm		AT-197		2.3	
RECEIVER		ECOM HEX.				AT-197		2.3	
TOTAL ANT. GAIN (XMITR + REC.)		2.0 + 2.0 = 4.0		dB					
TOTAL CABLE LOSS (XMITR + REC.)		2.3 + 2.3 = 4.6		dB					
XMITR. SITE HEIGHT ABOVE SEA LEVEL		FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL		FT.			
XMITR. ANT. HT. ABOVE GND (FT)		RCVD. PWR. (dBm)		PATH LOSS (dB) = (ESP) - (RCVD. PWR.)		AVG. PATH. LOSS (dB)		NO. OF SAMP	
TEST	TEST	TEST	TEST	TEST	TEST	TEST	TEST	TEST	TEST
720209-07	720209-08	720209-07	720209-08	720209-07	720209-08	720209-07	720209-08	720209-07	720209-08
10	82	83	78	125	126	125.5	126	2	2
15	77	78	78	120	121	120.5	121	2	2
20	78	78	76	121	121	121.0	121	2	2
25	76	76	72	119	119	119.0	119	2	2
30	74	74	69	117	115	116.0	115	2	2
35	69	69	70	112	112	112.0	112	2	2
40	73	73	68	116	113	114.5	113	2	2
45	71	71	67	118	111	114.5	111	2	2
50	68	68	65	111	110	110.5	110	2	2
55	66	66	66	109	108	108.5	108	2	2
60	67	67	64	110	109	109.5	109	2	2
65	65	65	64	108	107	107.5	107	2	2
7	-	78	-	-	121	121	121	1	1

REMARKS

END 720209-07 - 1545  
 START 720209-08 - 1550  
 END 720209-08 - 1555

PROPAGATION PATH LOSS  
DATE : 9 FEBRUARY 72 TEST RUN S/N: 720209-01-02  
PATH : WAYSIDE SITE No. 19B TO ECOM HEXAGON

OPER. FREQ. : 1545 MHz

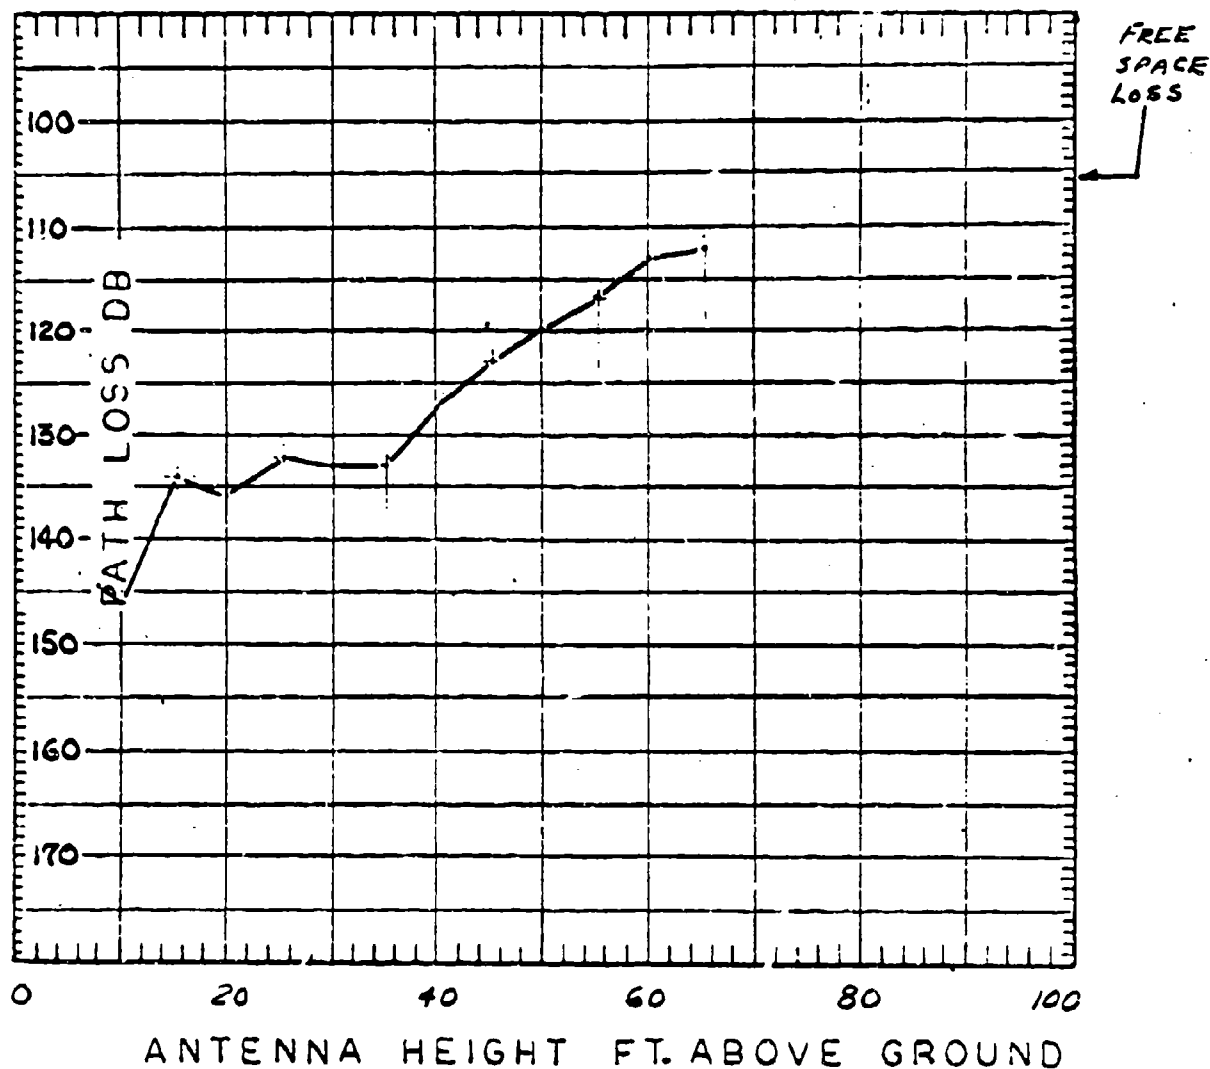


TEST DATA SHEET									
PER. FREQ.		1545 MHZ		DATE: 9 FEBRUARY 1971		REC. SITE ANT. HT.		FT.	
SITE		LOCATION		XMT. PWR.		TYPE ANT.		ANT. GAIN (dB)	
TRANSMITTER		WAYSIDE 19B		44 dB		HORN		14.4	
RECEIVER		ECOM H/EX.				ANDREW		0.3	
TOTAL ANT. GAIN (XMT + REC.)		14.4 + 0.3 = 14.7 dB				BICOINICAL		1.2	
TOTAL CABLE LOSS (XMT + REC.)		5.7 + 1.2 = 6.9 dB							
XMT. SITE HEIGHT ABOVE SEA LEVEL		140 FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL		140 FT.			
XMT. ANT. HT. ABOVE GN (FT)		RCVD. PWR. (dBm)		PATH LOSS (dB) = (ESP) - (RCVD. PWR.)		AVG. PATH. LOSS (dB)		NO. OF SAMP	
TEST	TEST	TEST	TEST	TEST	TEST	TEST	TEST	TEST	TEST
720209-01	720209-02	720209-01	720209-02	720209-01	720209-02	720209-01	720209-02	720209-01	720209-02
8	97	88	88	149	140	149	140	144.5	2
10	96	92	92	148	144	148	144	146.0	2
15	82	82	82	134	134	134	134	134.0	2
20	85	83	83	137	135	137	135	136.0	2
25	80	80	80	132	132	132	132	132.0	2
30	81	81	81	133	133	133	133	133.0	2
35	81	81	81	133	133	133	133	133.0	2
40	76	75	75	128	127	128	127	127.5	2
45	72	70	70	124	122	124	122	123.0	2
50	68	68	68	120	120	120	120	120.0	2
55	65	65	65	117	117	117	117	117.0	2
60	—	—	—	—	—	—	—	114.0	1
65	—	—	—	—	—	—	—	112.0	1
END 720209-01 - 1335									
START 720209-02 - 1350									
END 720209-02 - 1400									
MEAN READING OF STRIP CHART RECORDINGS									



PROPAGATION PATH LOSS  
DATE: 9 FEBRUARY 72 TEST RUN SIN: 720201-0304, FOR  
PATH: WAYSIDE SITE NO 19B TO ECOM HEYAGON

OPER. FREQ.: 1545 MHz

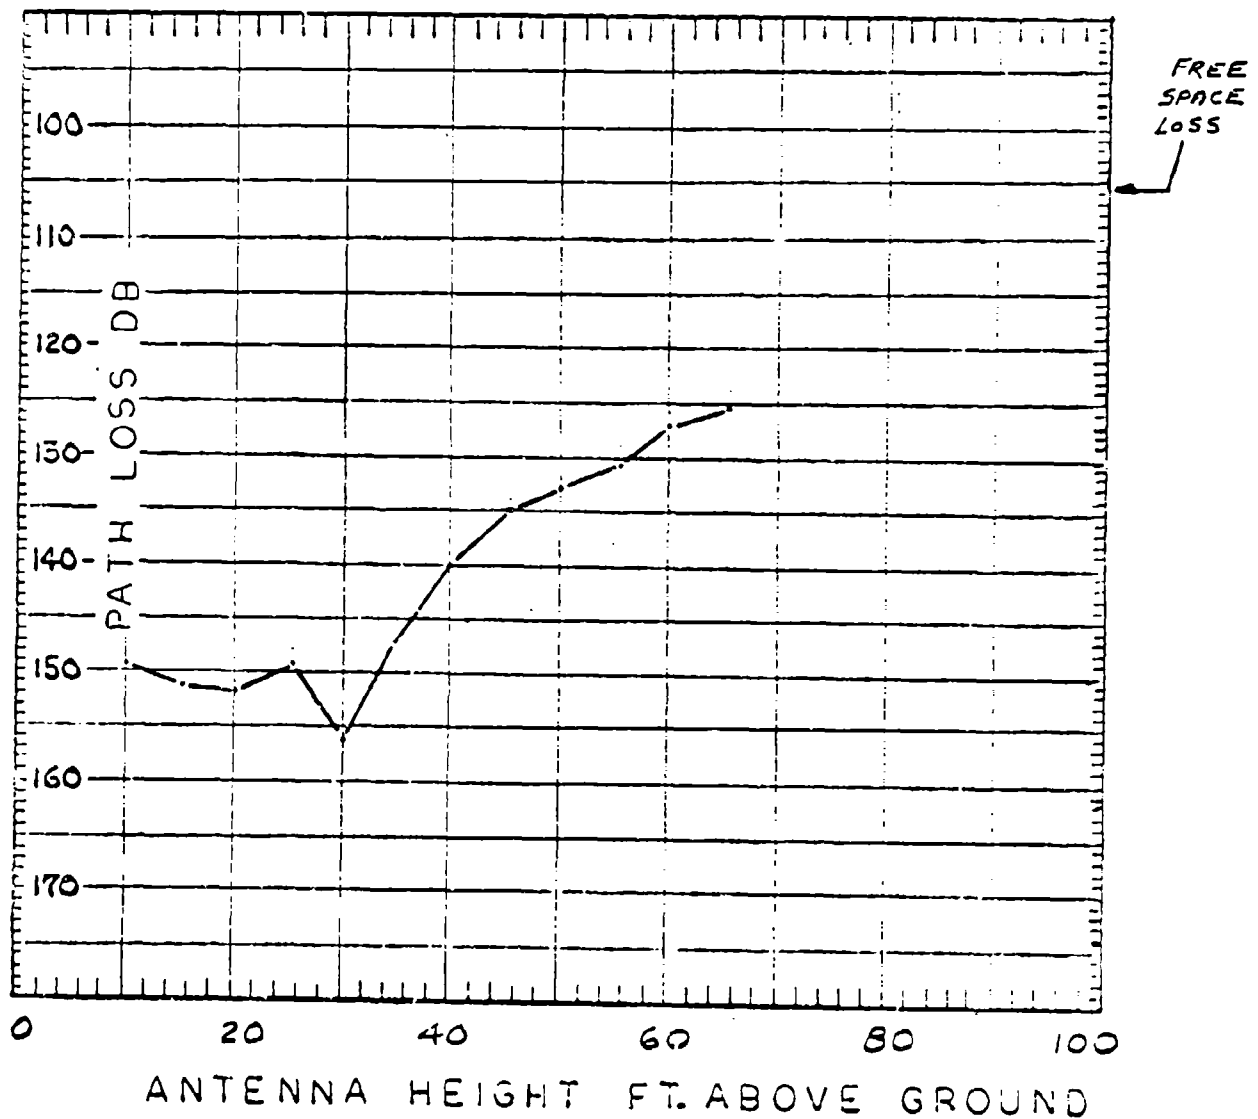




# PROPAGATION PATH LOSS

DATE : 14 FEBRUARY 72 TEST RUN S/N: 720214-01 02 03

PATH : WAYSIDE SITE NO. 194 TO ECON HEXAGON

OPER. FREQ. : 371.4 MHz

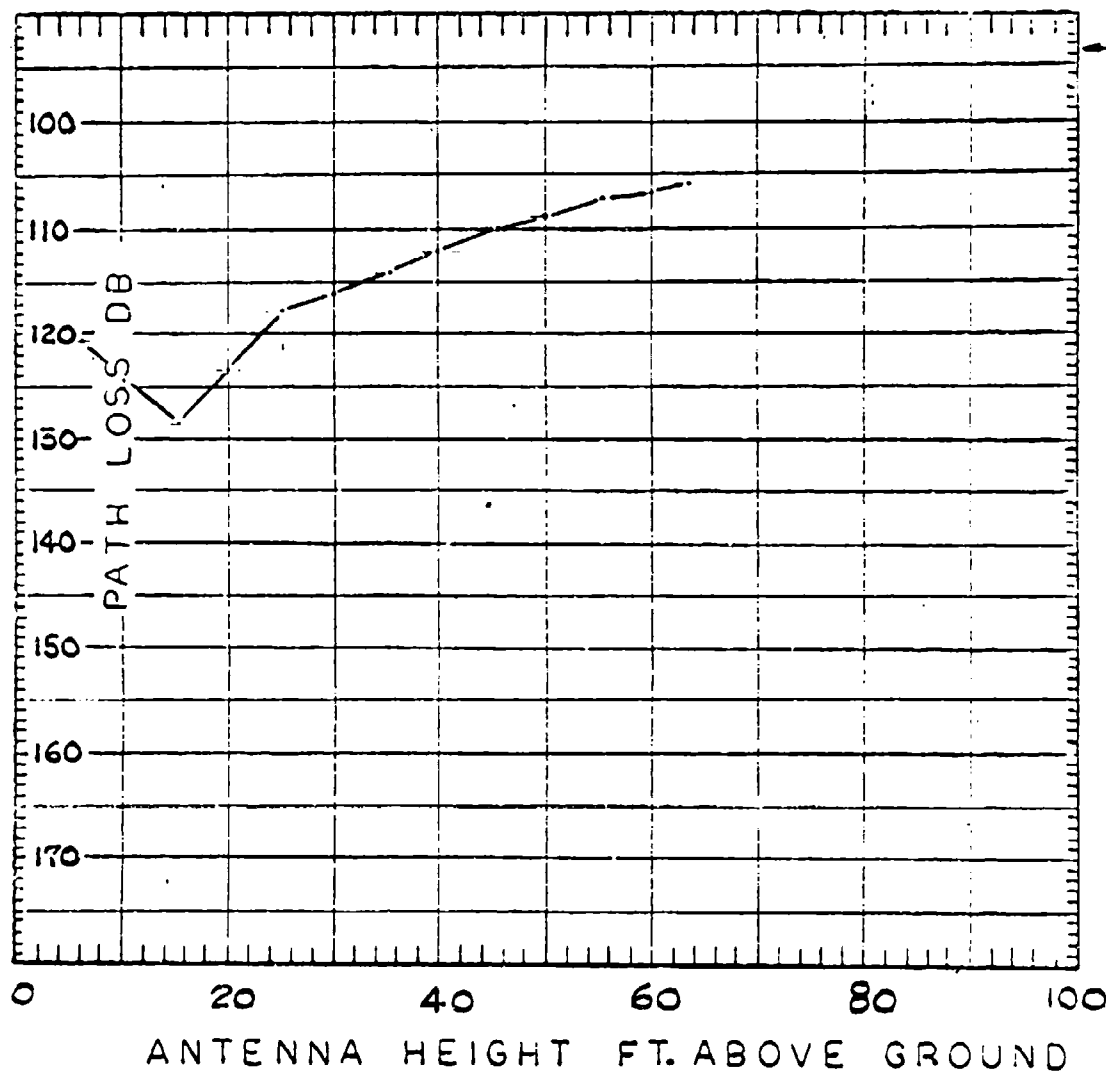


TEST DATA SHEET									
OPER. FREQ. 371.4 MHz		DATE: 14 FEBRUARY 1972		REC. SITE ANT. HT. FT.		START: 1105			
SITE	LOCATION	XMT. PWR.	TYPE ANTENNA	ANT. GAIN (dB)	CABLE LOSSES (dB)	EQUIV. SYS. PWR. (ESP)			
TRANSMITTER	WAXSIDE 19B	44.0 dBm	T-29	8.0	2.3	XMT. PWR. 44.0			
RECEIVER	ECOM 1/2 XN-201		AF-197	2.0	2.3	+ ANT. GAINS 10.0			
TOTAL ANT. GAIN (XMT + REC.)		8.0 + 2.0 = 10.0 dB				- CABLE LOSSES 4.6			
TOTAL CABLE LOSS (XMT + REC.)		2.3 + 2.3 = 4.6 dB				= ESP = 49.4 USE 49			
XMT. SITE HEIGHT ABOVE SEA LEVEL 140 FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL 140 FT.							
XMT. ANT. HT. ABOVE GND (FT)	RCVD. PWR. (dBm)		PATH LOSS (dB) = (ESP) - (RCVD. PWR.)		AVG. PATH. LOSS (dB)	NO. OF SAHP	REMARKS		
	TEST	TEST	720214.01	720214.02				720214.03	
6	72	71	72	121	120	121	120.7	3	TRANSMITTING ANTENNA VERTICALLY POLARIZED
10	75	76	76	124	125	125	124.7	3	
15	73	80	79	128	129	128	128.3	3	
20	74	77	73	123	126	122	123.7	3	
25	70	69	68	119	118	117	118.0	3	
30	68	67	67	117	116	116	116.3	3	
35	65	66	64	114	115	113	114.0	3	
40	63	-	63	112	-	112	112.0	2	
45	61	-	61	110	-	110	110.0	2	
50	60	-	60	109	-	109	109.0	2	
55	59	-	58	108	-	107	107.5	2	
60	58	-	58	107	-	107	107.0	2	
63	57	-	57	106	-	106	106.0	2	END 720214.01 → 1110
									START 720214.02 → 1119
									END 720214.02 → ?
									START 720214.03 → 1127
									END 720214.03 → 1132

# PROPAGATION PATH LOSS

DATE: 14 FEBRUARY 72 TEST RUN S/N: 720214-04405  
PATH: WAYSIDE SITE NO. 19B TO ECOM HEXAGON

OPER. FREQ.: 371.4 MHz


FREE  
SPACE  
LOSS

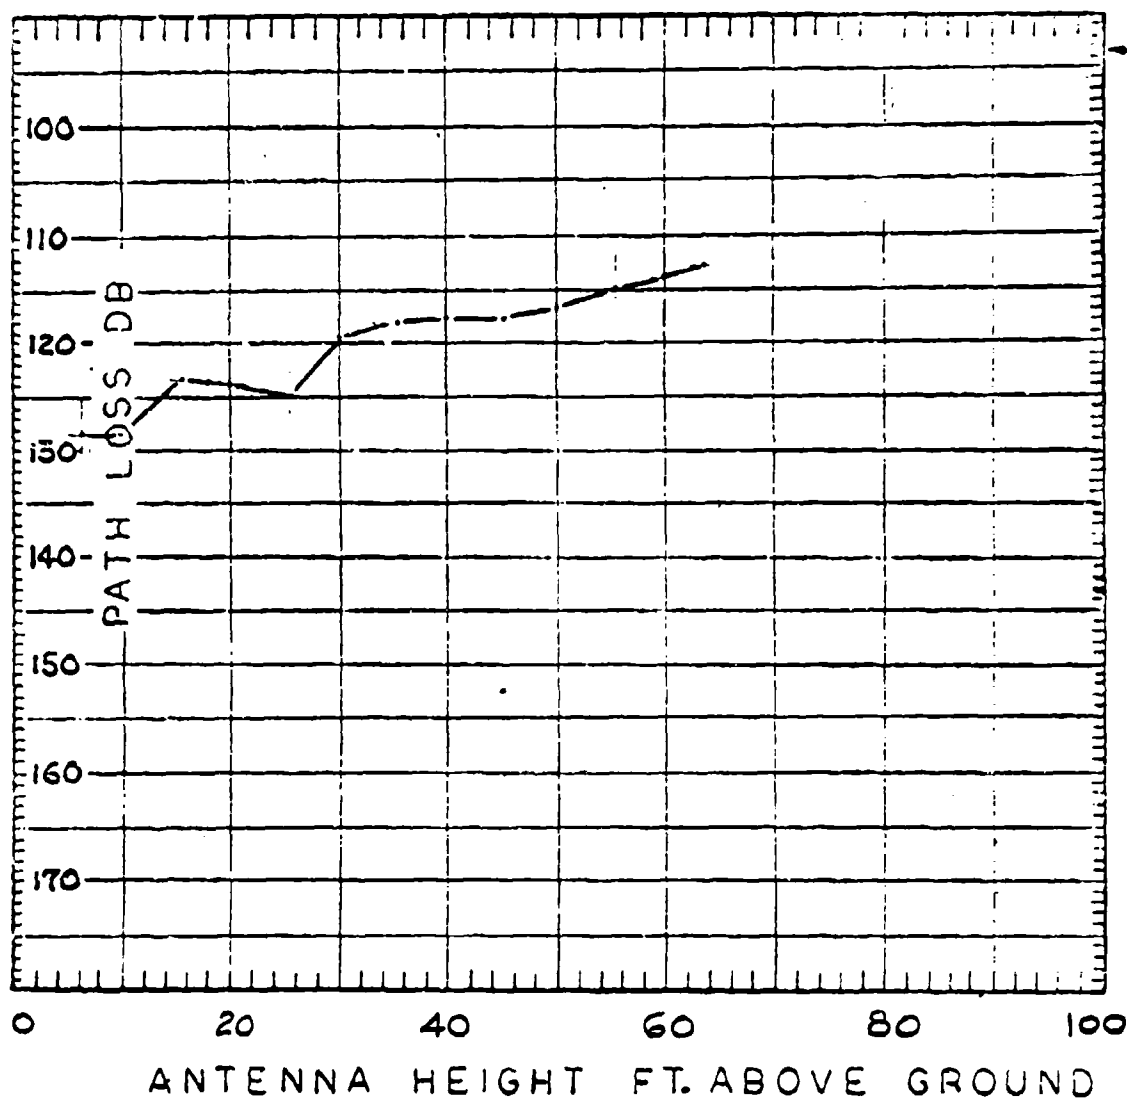

TEST DATA SHEET									
OPER. FREQ. 371.4		DATE: 14 FEBRUARY 1972		REC. SITE ANT. HT. FT.		START: 1145 HRS.			
SITE	LOCATION	XMTR. PWR.	TYPE ANTENNA	ANT. GAIN (dB)	CABLE LOSSES (dB)	EQUIV. SYS. PWR. (ESP)	TRANSMITTER	RECEIVER	
	WHYSIDE 19B	44 dBm	T-29	8.0	2.3	44.0			
	ECOM Hexagon		AT-197	2.0	2.3	10.0			
TOTAL ANT. GAIN (XMTR + REC.)		8.0 + 2.0 = 10.0		dB					
TOTAL CABLE LOSS (XMTR + REC.)		2.3 + 2.3 = 4.6		dB					
XMTR. SITE HEIGHT ABOVE SEA LEVEL		140		FT.					
RCVR. ANT. HEIGHT ABOVE SEA LEVEL		140		FT.					
XMTR. ANT. HT. ABOVE GND (FT)	RCVD. PWR. (dBm)	TEST	TEST	TEST	TEST	TEST	TEST	TEST	TEST
6	720214-04	720214-05	720214-04	720214-05	720214-04	720214-05	720214-04	720214-05	720214-04
10	80	79	129	128	129	128	129	128	129
15	80	79	129	128	129	128	129	128	129
20	74	75	123	124	123	124	123	124	123
25	71	76	123	125	123	125	123	125	123
30	75	77	124	126	124	126	124	126	123
35	70	71	119	120	119	120	119	120	119
40	69	70	118	119	118	119	118	119	118
45	69	69	118	118	117	119	116	118	118
50	68	70	117	119	116	118	114	116	114
55	67	69	116	118	114	116	114	114	114
60	65	67	114	116	114	114	114	114	114
65	65	65	114	114	113	114	113	114	114
69	69	65	113	114	113	114	113	114	114
REMARKS: TRANSMITTING ANTENNA HORIZONTAL POLARIZED END 720214-04 - INFO START 720214-05 - INFO END 720214-05 - INFO									

PROPAGATION PATH LOSS  
DATE: 14 FEBRUARY 72 TEST RUN S/N: 720214-08:09  
PATH: WAYSIDE SITE NO. 19B TO ECOM HEXAGON

OPER. FREQ.: 229.5 MHz

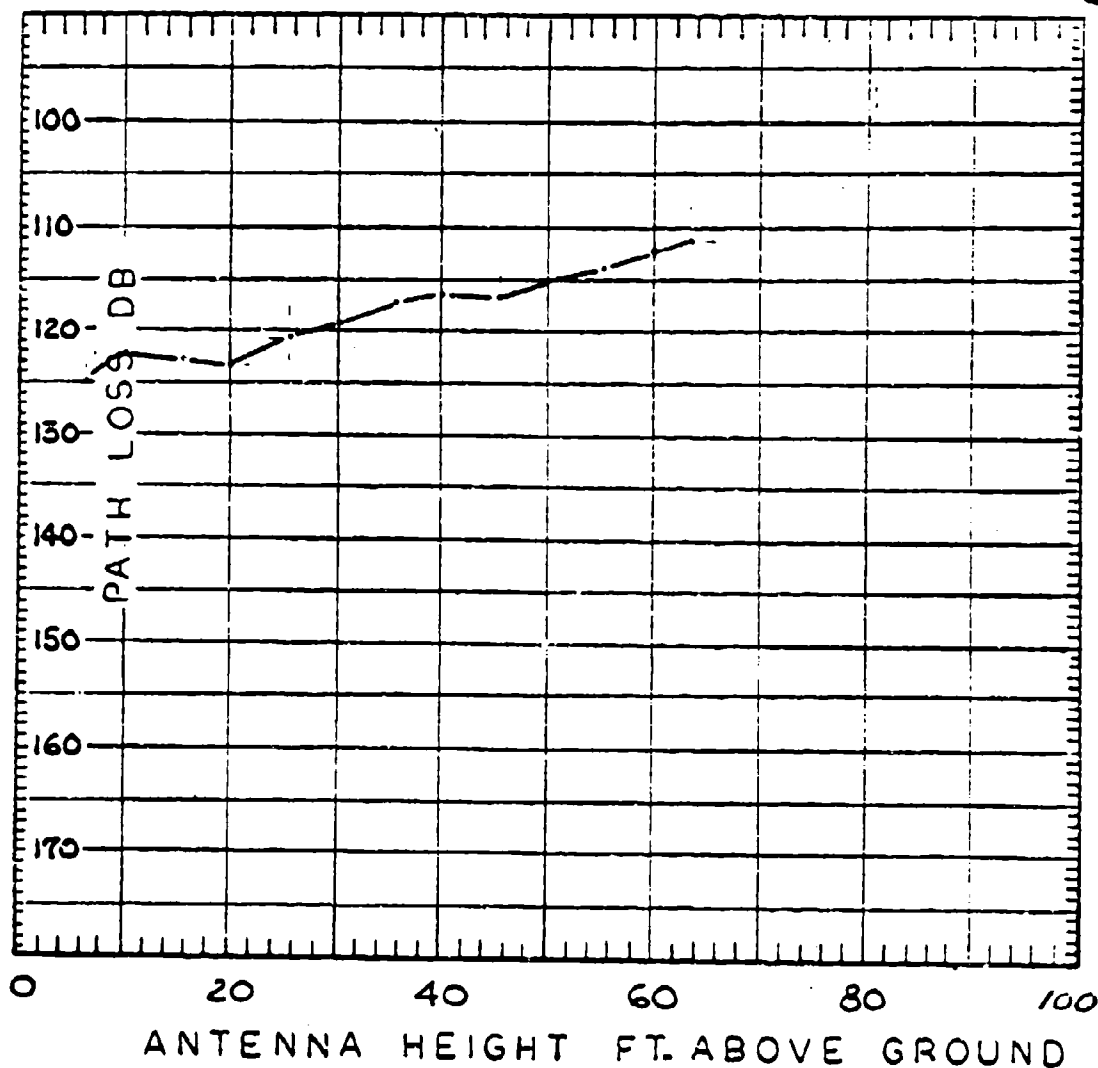


FREE  
SPACE  
LOSS  
89.2  
dB

TEST DATA SHEET									
OPER. FREQ. <u>229.5 MHz</u>		DATE: <u>14 FEB 72</u>		REC. SITE ANT. HT. <u>FT.</u>		START: <u>1350</u>			
SITE	LOCATION	XMT. PWR.	TYPE ANTENNA	ANT. GAIN (dB)	CABLE LOSSES (dB)	EQUIV. SYS. PWR. (ESP)	XMT. PWR.	+ANT. GAINS	-CABLE LOSSES
TRANSMITTER	WAYSIDE 19B	44 dBm	T-29	8.0	1.8		44.1	9.2	3.6
RECEIVER	ECCM HEXAGON		FT-197	1.2	1.8				
TOTAL ANT. GAIN (XMT + REC.)				8.0 + 1.2 = 9.2 dB					
TOTAL CABLE LOSS (XMT + REC.)				1.8 + 1.8 = 3.6 dB					
XMT. SITE HEIGHT ABOVE SEA LEVEL		140 FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL		170 FT.			
XMT. ANT. HT. ABOVE GND (FT)	RCVD. PWR. (dBm)		PATH LOSS (dB) = (ESP) - (RCVD. PWR.)		AVG. PATH. LOSS (dB)	NO. OF SAMP	REMARKS		
	TEST	TEST	TEST	TEST					
6	75	72	75	72	125	2	TRANSMITTING ANTENNA VERTICALLY POLARIZED		
10	72	73	72	73	125	2			
15	73	73	73	73	123.5	2			
20	74	73	73	73	123.0	2			
25	70	71	71	71	123.5	2			
30	69	70	70	70	120.5	2			
35	68	67	67	67	119.5	2			
40	66	67	67	67	117.5	2			
45	67	67	67	67	116.5	2			
50	64	66	66	66	112.0	2			
55	62	65	65	65	115.0	2			
60	62	63	63	63	114.0	2			
65	61	62	62	62	112.5	2			
					111.5	2			
						END 720214-08 -- 1354			
						START 720214-09 -- 1400			
						END 720214-09 -- 1406			



PROPAGATION PATH LOSS  
DATE : 14 FEBRUARY 72 TEST RUN S/N: 720214-06407  
PATH : WAYSIDE SITE No. 19B TO ECOM HEXAGON

OPER. FREQ. : 229.5 MHz

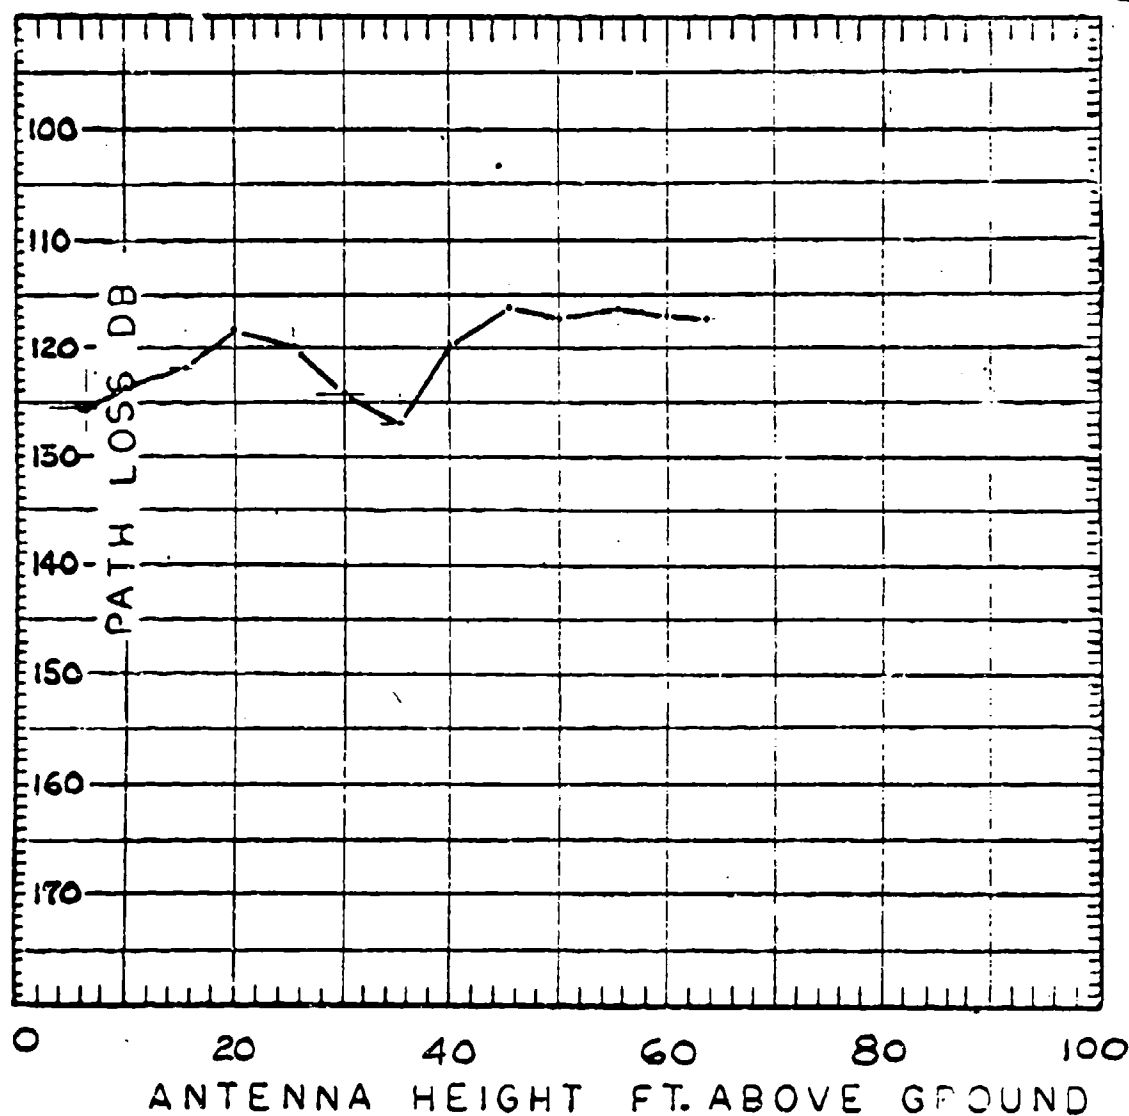


TEST DATA SHEET									
OPER. FREQ.		229.5 MHz		DATE: 14 FEBRUARY 1972		REC. SITE ANT. HT.		FT.	
START: 1327 HRS.									
SITE	LOCATION	XMTR. PWR.	TYPE ANTENNA	ANT. GAIN (dB)	CABLE LOSSES (dB)	EQUIV. SYS. PWR. (ESP)			
TRANSMITTER	WAYSIDE 19B	44 dBm	T-29	8.0	1.8	44.0			
RECEIVER	ECOM Hexagon		AT-197	1.2	1.8	9.2			
TOTAL ANT. GAIN (XMTR + REC.)		8.0 + 1.2 =		9.2 dB					
TOTAL CABLE LOSS (XMTR + REC.)		1.8 + 1.8 =		3.6 dB					
XMTR. SITE HEIGHT ABOVE SEA LEVEL		140 FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL		140 FT.			
XMTR. ANT. HT. ABOVE GND (FT)	TEST	RCVD. PWR. (dBm)	TEST	TEST	PATH LOSS (dB) = (ESP) - (RCVD. PWR.)	AVG. PATH. LOSS (dB)	NO. OF SAMP	REMARKS	
6	75	76	76	76	720214-06	125.5	2	TRANSMITTING ANTENNA	
10	74	74	74	74	720214-07	124.0	2	HORIZONTALLY POLARIZED	
15	72	72	72	72	720214-06	122.0	2		
20	67	70	70	70	720214-07	118.5	2		
25	70	70	70	70	720214-06	120.0	2		
30	74	75	75	75	720214-07	124.5	2		
35	77	77	77	77	720214-06	127.0	2		
40	70	70	70	70	720214-07	120.0	2		
45	67	66	66	66	720214-06	116.5	2		
50	67	68	68	68	720214-07	117.5	2		
55	66	67	67	67	720214-06	116.5	2		
60	67	67	67	67	720214-07	117.0	2		
65	67	68	68	68	720214-06	117.5	2		
								END 720214-06 - 1332	
								START 720214-07 - 1338	
								END 720214-07 - 1344	

# PROPAGATION PATH LOSS

DATE: 16 FEBRUARY 72 TEST RUN S/N: 720216-01 F-02

PATH: WAYSIDE SITE NO. 198 TO ECOM HEXAGON

OPER. FREQ.: 371.4 MHz

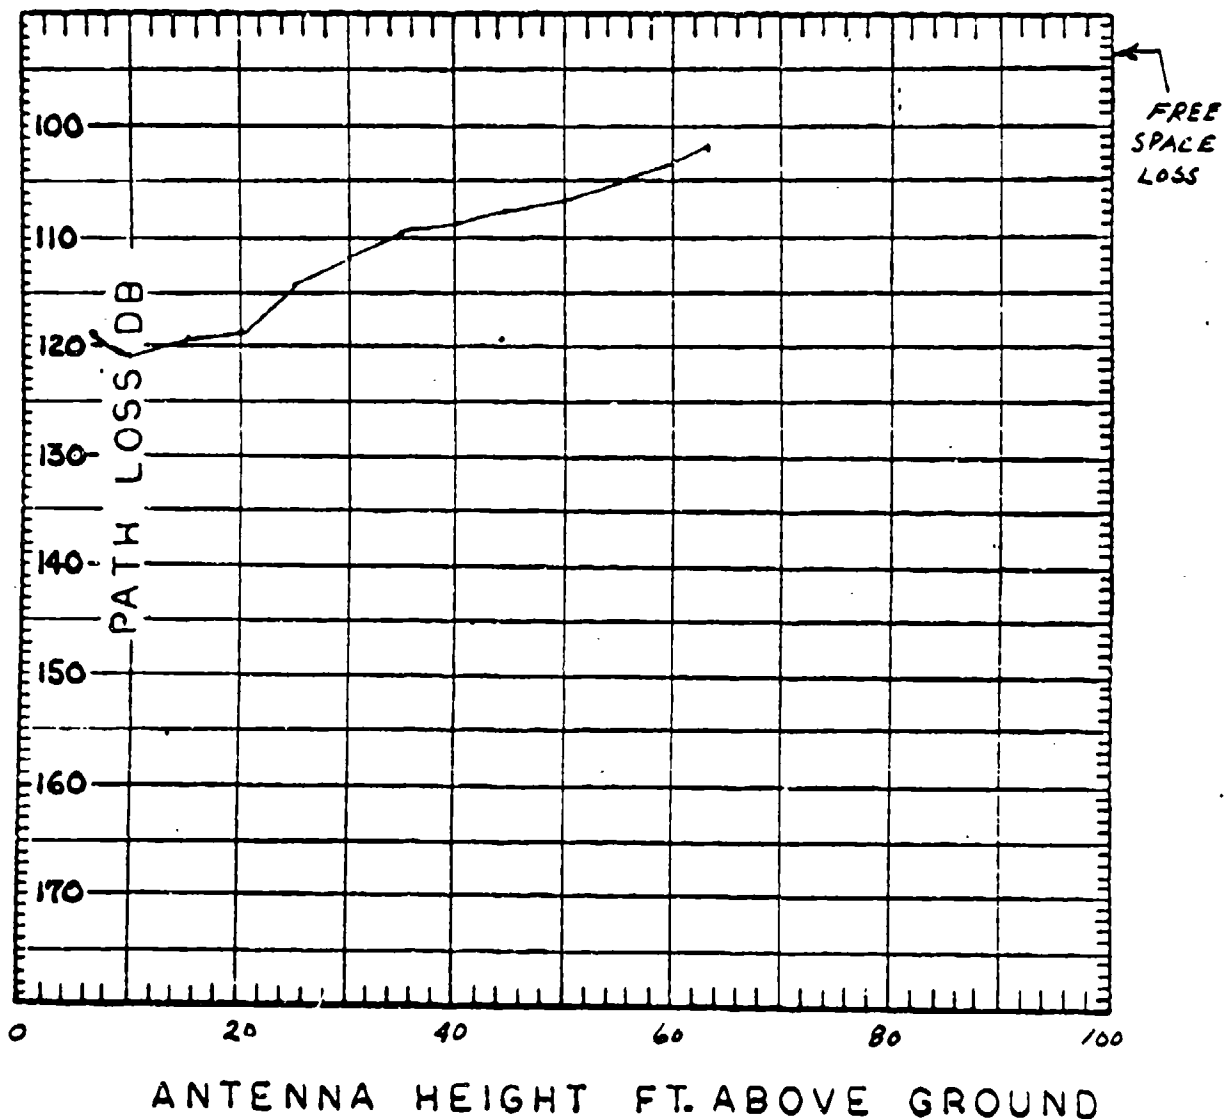


TEST DATA SHEET									
OPER. FREQ.		371.4 MHz		DATE: 16 FEBRUARY 1972		START: 0940 HRS.		FT.	
SITE		LOCATION		XMIT. PWR.		TYPE ANTENNA		ANT. GAIN (dB)	
TRANSMITTER		WAYSIDE 198		44 dBm		EMCO 3101		6.10	
RECEIVER		ECOM Hexagon				AT-197		2.00	
TOTAL ANT. GAIN (XMITR + REC.)		6.10 + 2.00 =		8.10 dB					
TOTAL CABLE LOSS (XMITR + REC.)		2.3 + 2.3 =		4.60 dB					
XMITR. SITE HEIGHT ABOVE SEA LEVEL		140 FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL		140 FT.			
XMITR. ANT. HT. ABOVE GND (FT)	RCVD. PWR. (dBm)		PATH LOSS (dB) = (ESP) - (RCVD. PWR.)		AVG. PATH. LOSS (dB)	NO. OF SAMPL	REMARKS		
	TEST	TEST	720216-01	720216-02					
6	71	70	119	118	118.5	2			
10	74	73	122	121	121.5	2			
15	70	72	118	120	119.0	2			
20	69	71	117	119	118.0	2			
25	66	67	114	115	114.5	2			
30	64	64	112	112	112.0	2			
35	61	62	109	110	109.5	2			
40	60	61	108	109	108.5	2			
45	59	60	107	108	107.5	2			
50	58	58	106	106	106.5	2			
55	57	57	105	105	105.0	2			
60	55	55	103	103	103.0	2			
63	54	54	102	102	102.0	2			
							END 720216-01 - 0943		
							START 720216-02 - 0950		
							END 720216-02 - 0955		

# PROPAGATION PATH LOSS

DATE : 16 FEBRUARY 72 TEST RUN S/N : 720216-03 04F05

PATH : WAYSIDE SITE NO 19B TO ECOM HEXAGON

OPER. FREQ. : 229.5 MHz

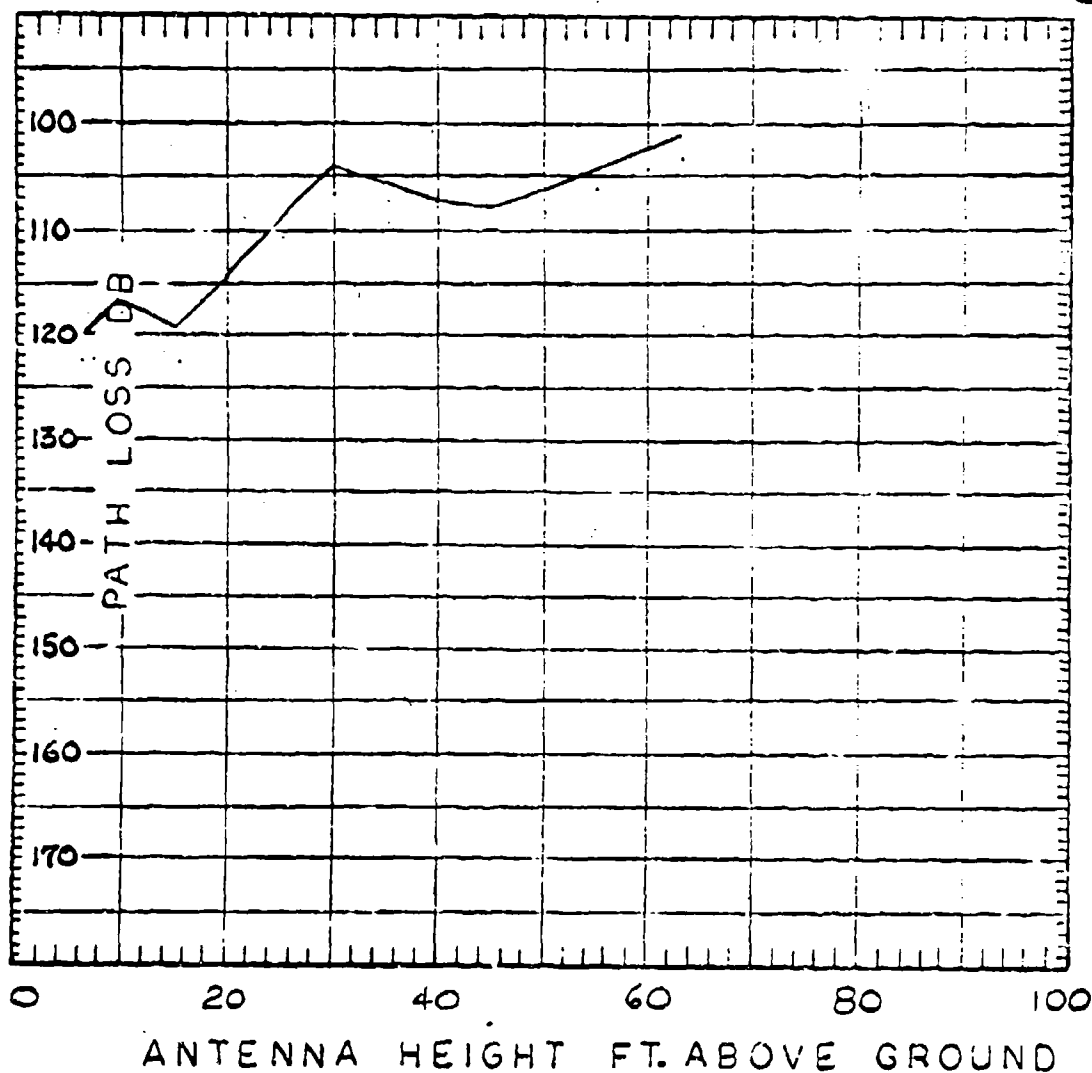


FREE  
SPACE  
LOSS  
89.2dB

TEST DATA SHEET									
OPER. FREQ.		229.5 MHz		DATE: 16 FEBRUARY 1972		REC. SITE ANT. HT.		FT.	
SITE		LOCATION		XMITR. PWR.		TYPE ANTENNA		ANT. GAIN (dB)	
TRANSMITTER		WAYSIDE 19B		44.6W		EMCO 3101		-3.80	
RECEIVER		ECOM HAYAGON				AT-197		1.20	
TOTAL ANT. GAIN (XMITR + REC.)		-3.80 + 1.20 =		-2.6		dB			
TOTAL CABLE LOSS (XMITR + REC.)		1.8 + 1.8 =		3.6		dB			
XMITR. SITE HEIGHT ABOVE SEA LEVEL		170		FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL		170	
XMITR. ANT. FT.		RCVD. PWR. (dBH)		PATH LOSS (dB) =		AVG. PATH. LOSS (dB)		NO. OF SAMP	
ANT. FT.		TEST		TEST		TEST		TEST	
GND (FT)		720216-03		720216-04		720216-05			
6	81	82	78	71	119	120	119.7	3	
10	77	72	82	69	115	116	116.7	3	
15	80	82	82	71	118	120	119.3	3	
20	75	80	75	71	113	113	114.7	3	
25	70	70	71	71	108	109	108.3	3	
30	67	67	69	69	105	107	104.7	3	
35	67	67	68	68	105	106	105.3	3	
40	70	70	68	68	108	106	107.3	3	
45	69	70	71	71	107	109	108.0	3	
50	67	69	69	69	105	107	106.3	3	
55	66	67	66	66	104	104	104.7	3	
60	63	66	65	65	101	103	102.7	3	
63	62	63	63	63	100	101	101.3	3	
REMARKS		END 720216-03-1013 START 720216-04-1020 END 720216-04-1025 START 720216-05-1030 END 720216-05-1035							

# PROPAGATION PATH LOSS

DATE : 16 FEBRUARY 72 TEST RUN S/N: 720216.06.07 F 08  
PATH: WAYSIDE SITE No. 19B TO ECOM HEXAGON

OPER. FREQ. : 1545 MHz

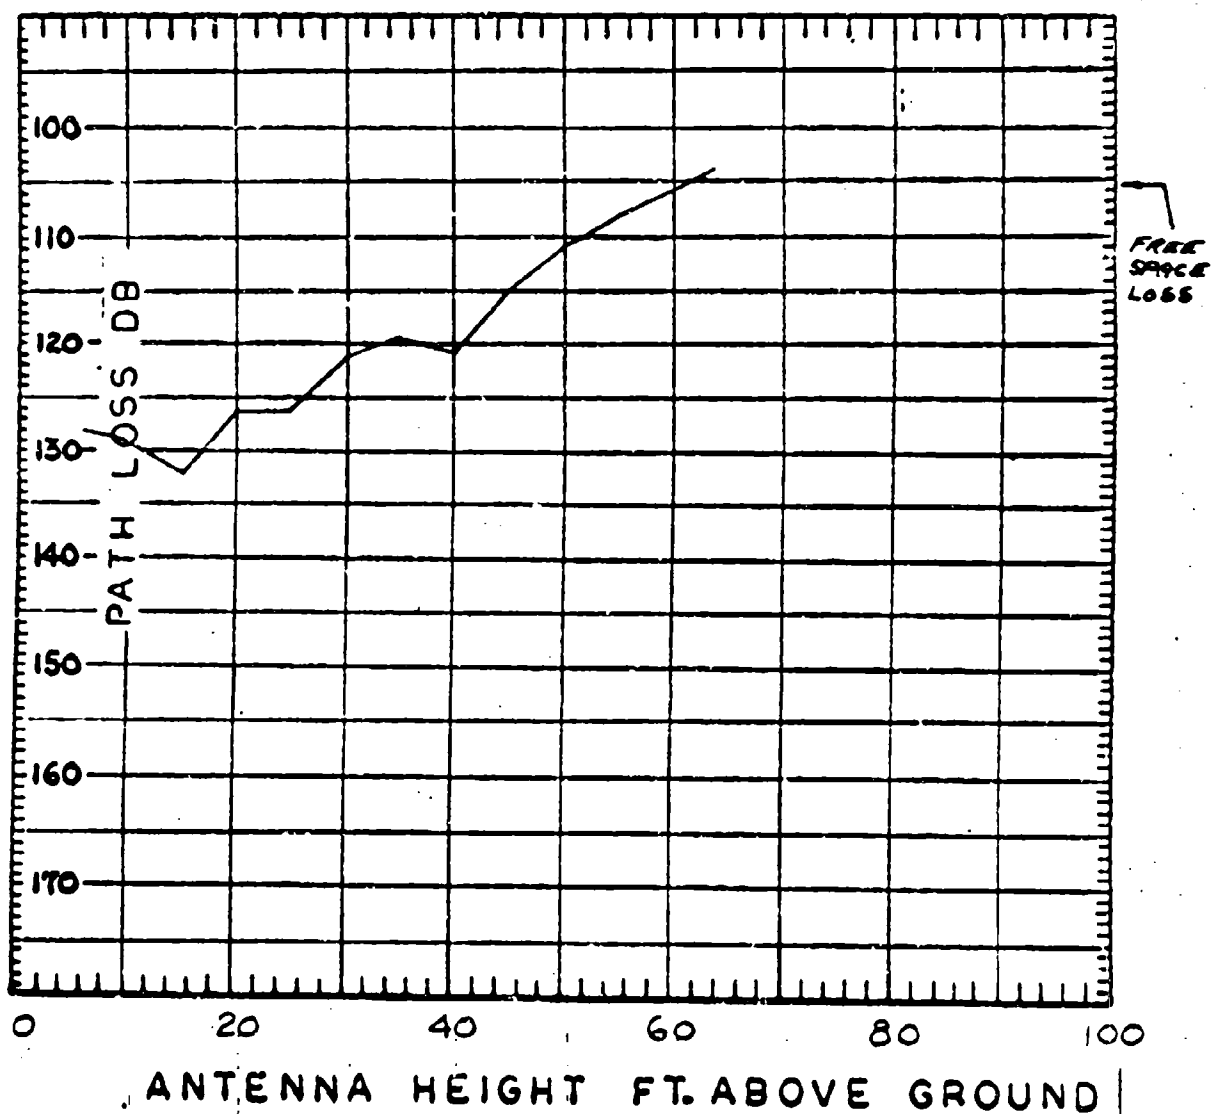

TEST DATA SHEET									
OPER. FREQ. 1545 MHZ		DATE: 16 FEB. 72		REC. SITE ANT. HT. FT.		START: 1125 HRS.			
SITE	LOCATION	XMT. PWR.	TYPE ANTENNA	ANT. GAIN (dB)	CABLE LOSSES (dB)	EQUIV. SYS. PWR. (ESP)			
TRANSMITTER	WPC-10E 19B	44 dBm	EMCO	-0.4	5.7	XMT. PWR.			
RECEIVER	ECOM HEX.		EMCO	+0.3	1.2	+ANT. GAINS -0.1			
TOTAL ANT. GAIN (XMT + REC.)		-0.4 + 0.3 =		-0.1 dB					
TOTAL CABLE LOSS (XMT + REC.)		5.7 + 1.2 =		6.9 dB					
XMT. SITE HEIGHT ABOVE SEA LEVEL		140 FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL		140 FT.			
XMT. ANT. HT. ABOVE GND (FT)	RCVD. PWR. (dBm)		PATH LOSS (dB) = (ESP) - (RCVD. PWR.)		AVG. PATH. LOSS (dB)	NO. OF SAMPL	REMARKS		
	TEST	TEST	TEST	TEST					
6	720216.06	720216.07	720216.08	720216.09	127	128	128.0	3	
10	90	92	91	90	130	127	129.0	3	
15	93	93	90	92	134	127	132.5	3	
20	97	97	92	90	127	127	126.0	3	
25	87	90	88	87	124	125	126.0	3	
30	82	85	84	84	120	121	121.0	3	
35	82	83	82	82	119	119	119.3	3	
40	85	83	83	83	120	120	121.7	3	
45	80	76	78	78	117	115	115.0	3	
50	75	74	73	73	112	110	111.0	3	
55	73	70	71	71	110	108	108.5	3	
60	70	67	67	67	107	106	106.3	3	
63	68	67	67	67	105	104	104.3	3	
									END 720216.06 - 1130
									START 720216.07 - 1132
									END 720216.07 - 1137
									START 720216.08 - 1143
									END 720216.08 - 1145




# PROPAGATION PATH LOSS

DATE : 17 FEBRUARY 72 TEST RUN S/N: 720217-02, 03 & 04

PATH : WAYSIDE SITE NO. 9 TO ECOM HEXAGON


OPER. FREQ. : 1545 MHz

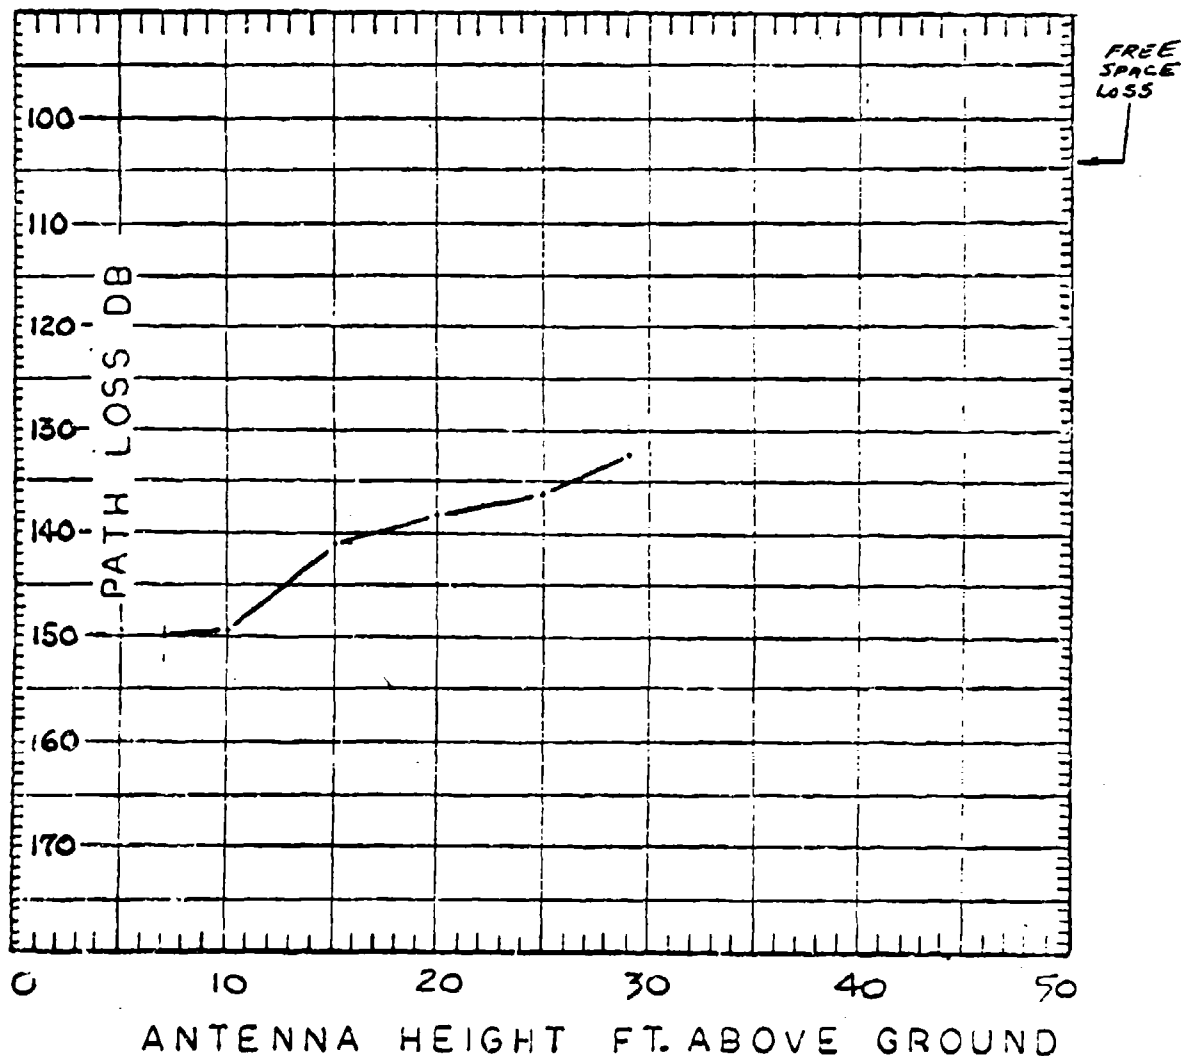

TEST DATA SHEET									
OPER. FREQ. 1545 MHz		DATE: 17 FEBRUARY 1972		REC. SITE ANT. HT. FT.		START: 1115 HRS.			
SITE	LOCATION	XMTR. PWR.	TYPE ANTENNA	ANT. GAIN (dB)	CABLE LOSSES (dB)	EQUIV. SYS. PWR. (ESP)			
TRANSMITTER	WAYSIDE 9	44 dBm	REL. HORN	14.4	5.7	XMTR. PWR. 44.0			
RECEIVER	ECOM HEXAGON		ANDREW BICONICAL	0.3	1.2	+ANT. GAINS 14.7			
TOTAL ANT. GAIN (XMTR + REC.)		14.4 + 0.3 =		14.7	dB	-CABLE LOSSES 6.9			
TOTAL CABLE LOSS (XMTR + REC.)		5.7 + 1.2 =		6.9	dB	=ESP = 51.8 USE 52			
XMTR. SITE HEIGHT ABOVE SEA LEVEL 140 FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL 145 FT.							
XMTR. ANT. HT. ABOVE GND (FT)	RCVD. PWR. (dBm)		PATH LOSS (dB) = (ESP) - (RCVD. PWR.)			AVG. PATH. LOSS (dB)	NO. OF SAMP	REMARKS	
	TEST	TEST	720217-02	720217-03	720217-04				
29	81	80	133	132	133	132.3	6	RUN 720217-01 DISCONTINUED	
25	84	85	136	136	137	136.3	6		
20	88	87	140	139	139	138.5	6		
15	92	92	142	142	140	141.0	6		
10	98	97	150	149	149	149.7	6		
7	97	99	149	151	150	150.0	3		
10	93	94	145	146	149				
15	85	88	140	140	142				
20	84	87	136	139	138				
25	83	86	135	138	136				
29	80	80	132	133	132				
END 720217-02 - 1125									
START 720217-03 - 1129									
END 720217-03 - 1137									
START 720217-04 - 1347									
END 720217-04 - 1357									

PROPAGATION PATH LOSS  
DATE : 17 FEBRUARY 72 TEST RUN S/N: 720217-05406  
PATH: WAYSIDE SITE NO. 9 TO ECOM HEXAGON

OPER. FREQ. : 1545 MHz

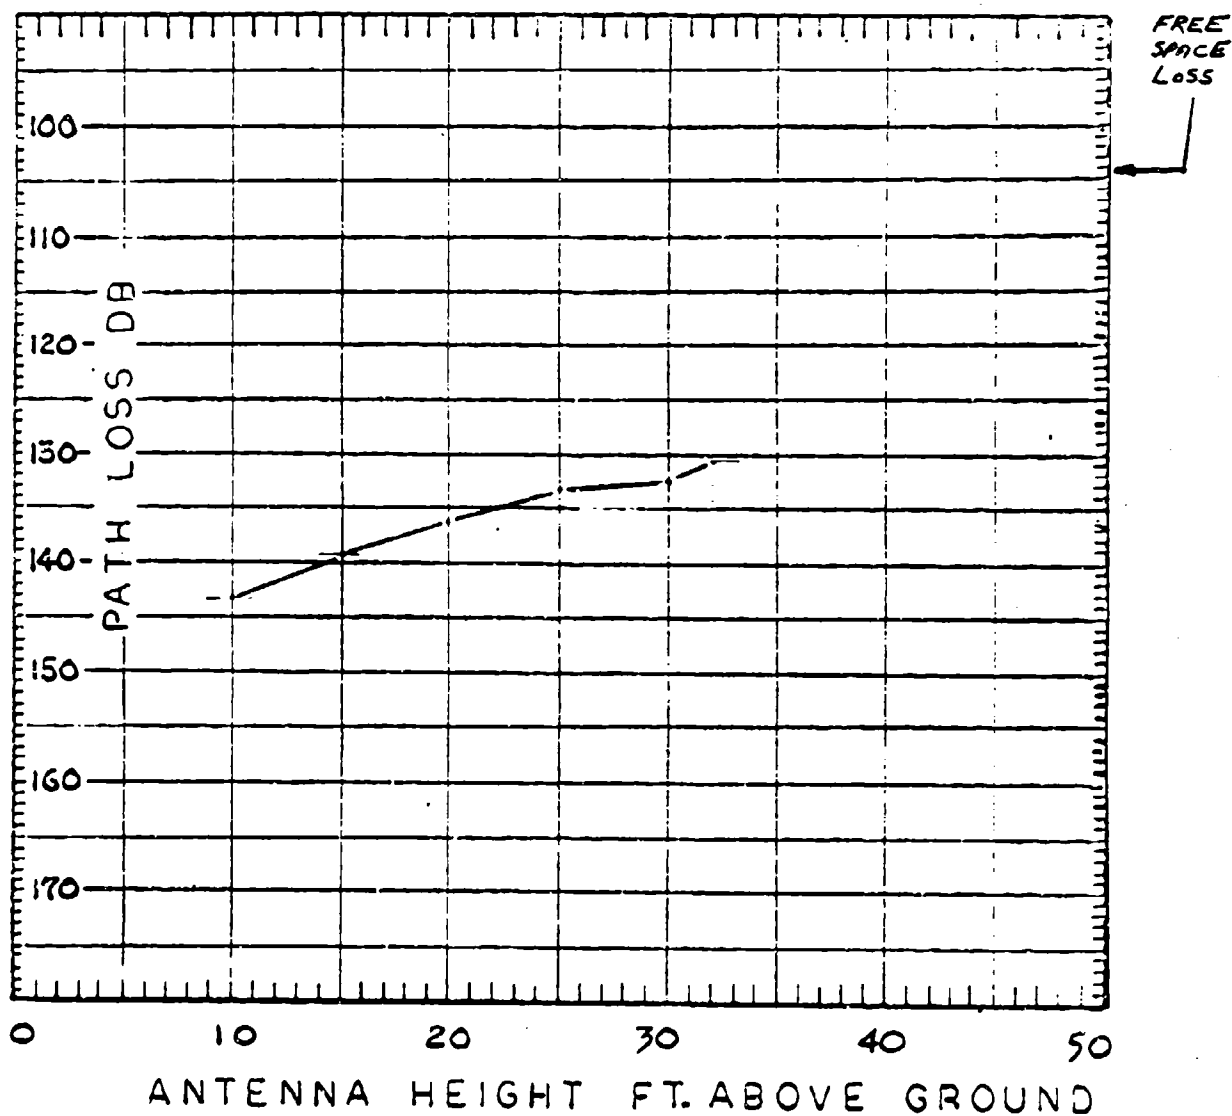


TEST DATA SHEET									
OPER. FREQ. 154.5 MHZ		DATE: 17 FEBRUARY 1972		REC. SITE ANT. HT. FT.		START: 1430 HRS.			
SITE	LOCATION	XMTR. PWR.	TYPE ANTENNA	ANT. GAIN (dB)	CABLE LOSSES (dB)	EQUIV. SYS. PWR. (ESP)			
TRANSMITTER	WAYSIDE 9	140 dBm	ANDREW DISCONE	2.5	5.7	XMTR. PWR. 11.0			
RECEIVER	ECONOMIXAGON		ANDREW BROWNICAL	0.3	1.2	+ANT. GAINS 2.8			
TOTAL ANT. GAIN (XMTR + REC.)		2.5 + 0.3 = 2.8		dB		-CABLE LOSSES 6.9			
TOTAL CABLE LOSS (XMTR + REC.)		5.7 + 1.2 = 6.9		dB		-ESP = 29.7	10		
XMTR. SITE HEIGHT ABOVE SEA LEVEL 140 FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL 145 FT.							
XMTR. ANT. HT. ABOVE GND (FT)	RCVD. PWR. (dBm)		PATH LOSS (dB) = (ESP) - (RCVD. PWR.)		AVG. PATH. LOSS (dB)	NO. OF SAIP	REMARKS		
	TEST	TEST	TEST	TEST					
10	103	720217-05	143	142	143.3	4			
15	98	101	138	141	139.3	4			
20	97	97	137	137	136.3	4			
25	94	95	134	135	133.3	4			
30	93	92	133	132	132.8	4			
32	91	90	131	130	130.5	2			
30	93	93	133	133					
25	92	92	132	132					
20	97	95	137	135					
15	100	99	140	139					
10	103	105	143	145					
ENC 720217-05 - 1139									
SIREL 720217-06 - 1444									
END 720217-06 - 1452									

PROPAGATION PATH LOSS

DATE: 18 FEBRUARY 72 TEST RUN S/N: 720218-01402

PATH: WAYSIDE SITE NO. 9 TO ECOM HEXAGON

OPER. FREQ.: 1545 MHz

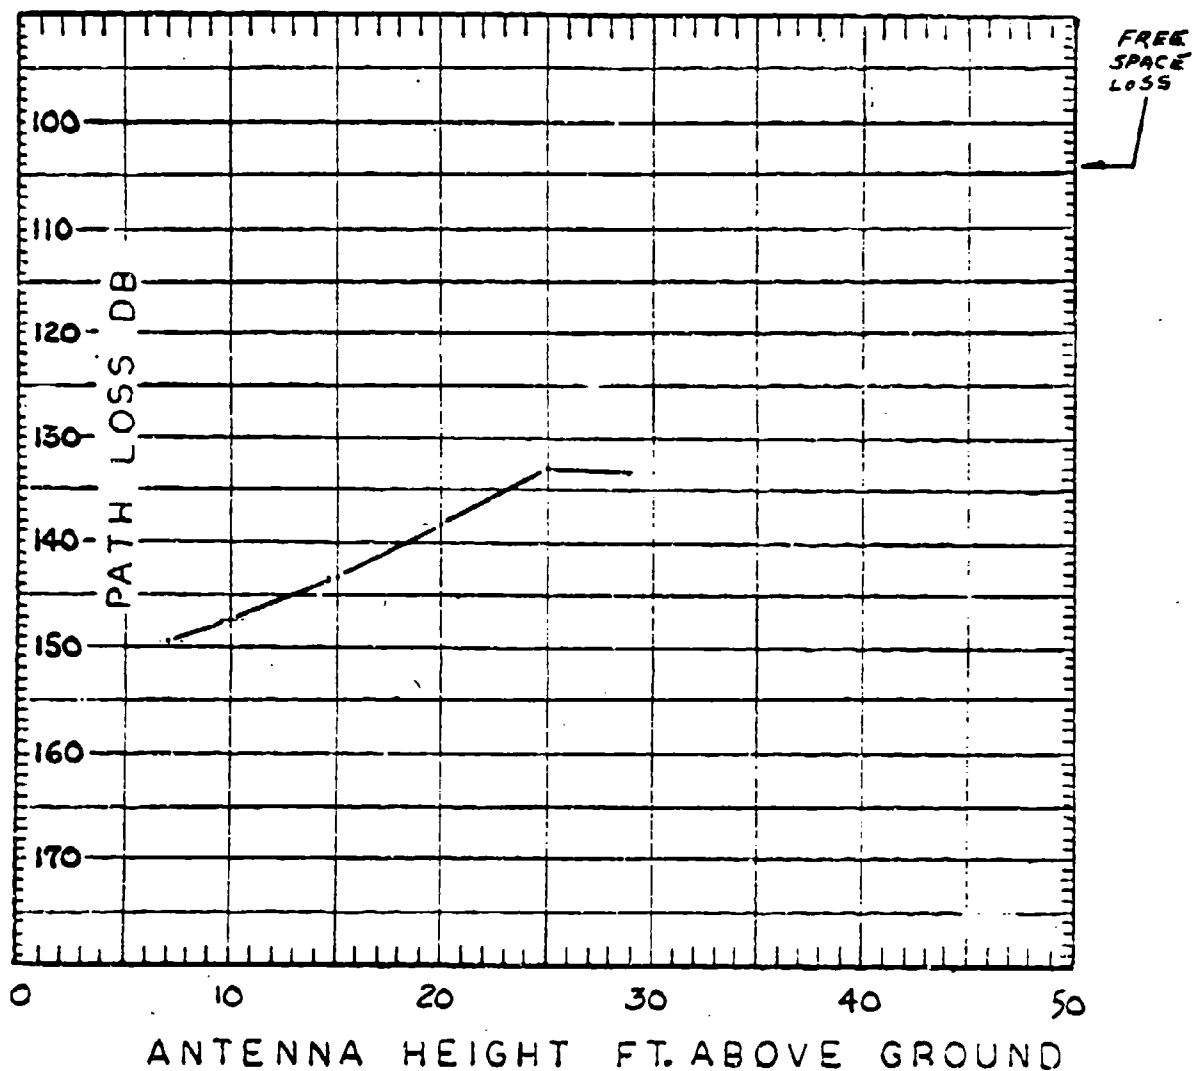


TEST DATA SHEET									
OPER. FREQ. 1545 MHz		DATE: 18 FEBRUARY 1972		REC. SITE ANT. HT. FT.		START: 0955		H.M.	
SITE	LOCATION	XMTR. PWR.	TYPE ANTENNA	ANT. GAIN (dB)	CABLE LOSSES (dB)	EQUIV. SYS. PWR. (ESP)			
TRANSMITTER	WAYSIDE 9	44 dBm	REL HORN	14.4	5.7	XMTR. PWR. 44.0			
RECEIVER	ECONOMIXAGON		ANDREW BICONICAL	0.3	1.2	+ANT. GAINS 14.7			
TOTAL ANT. GAIN (XMTR + REC.)		14.4 + 0.3 = 14.7 dB				-CABLE LOSSES 6.9			
TOT. - CABLE LOSS (XMTR + REC.)		5.7 + 1.2 = 6.9 dB				=ESP = 51.8 dB	52		
XMTR. SITE HEIGHT ABOVE SEA LEVEL 140 FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL 145 FT.							
XMTR. ANT. HT. ABOVE GND (FT)	RCVD. PWR. (dBm)		PATH LOSS (dB) = (ESP) - (RCVD. PWR.)		AVG. PATH. LOSS (dB)	NO. OF SAMP	REMARKS		
	TEST	TEST	TEST	TEST					
7	720218-01	720218-02	148	151	149.8	4			
10	93	98	145	150	147.5	4			
15	89	93	141	145	143.3	4			
20	86	87	138	139	138.5	4			
25	81	81	133	133	133.0	4			
29	81	82	133	134	133.5	4			
25	81	81	133	133					
20	86	87	138	139					
15	91	92	143	144					
10	95	96	147	148					
7	98	98	150	150					
END 720218-01 - 1009									
START 720218-02 - 1014									
END 720218-02 - 1022									

# PROPAGATION PATH LOSS

DATE : 18 FEBRUARY 72 TEST RUN S/N: 720218-03104

PATH : WAYSIDE SITE NO. 9 TO ECOM HEXAGON

OPER. FREQ. : 1545 MHZ

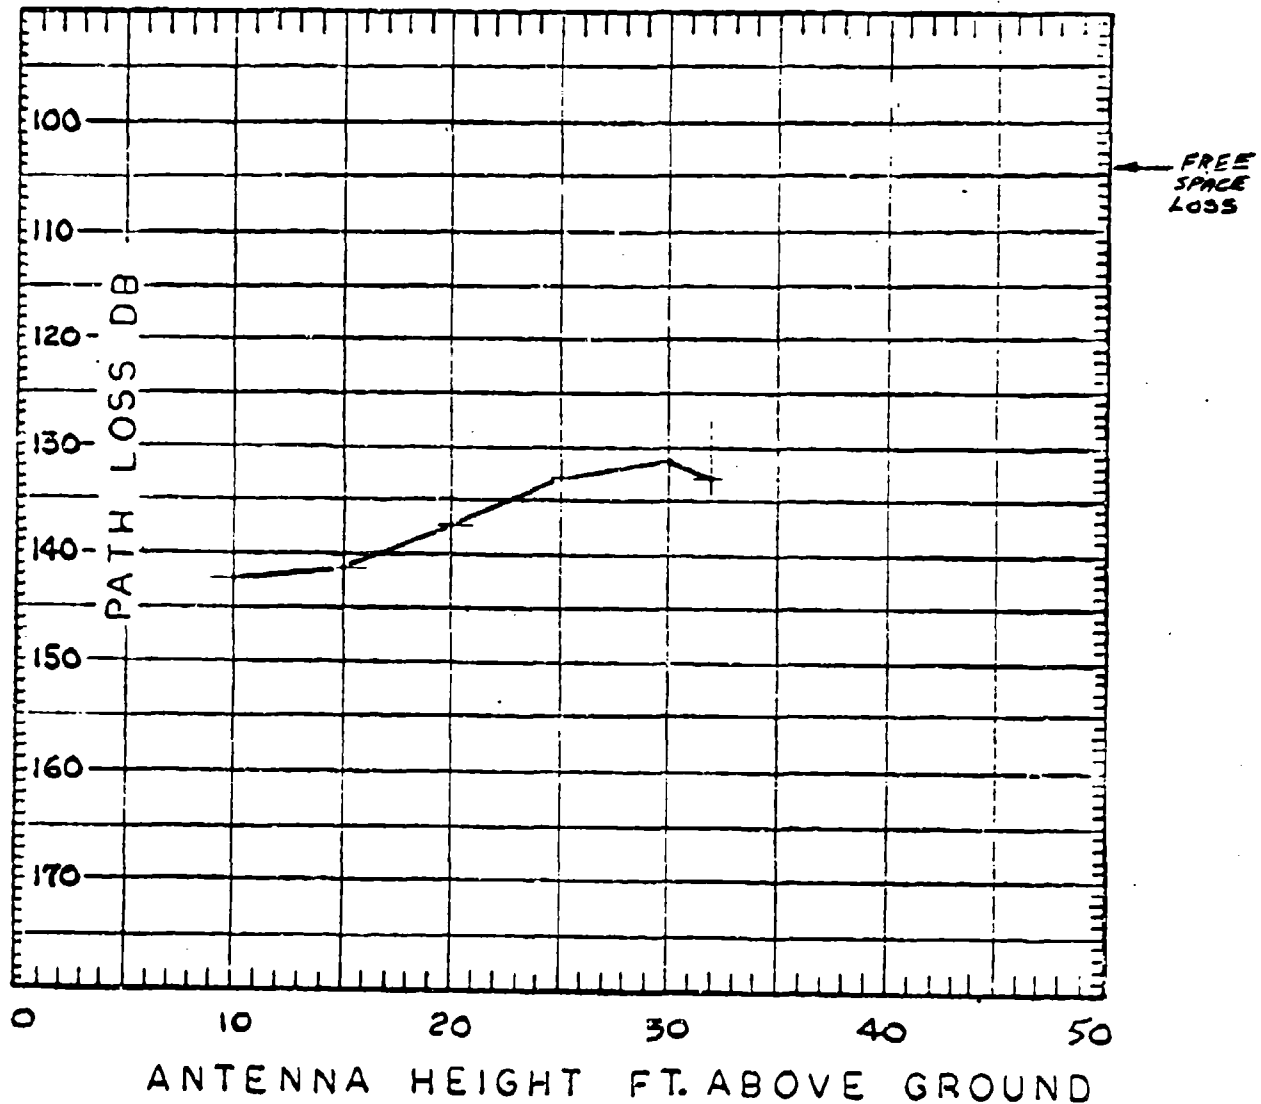


TEST DATA SHEET									
OPER. FREQ. <u>1545 MHz</u>		REC. SITE ANT. HT. <u>FT.</u>		DATE: <u>18 FEBRUARY 1972</u>		START: <u>1035 HRS</u>			
SITE	LOCATION	XMT. PWR.	TYPE ANTENNA	ANT. GAIN (dB)	CABLE LOSSES (dB)	EQUIV. SYS. PWR. (ESP)			
TRANSMITTER	WAXSIDE 9	44 dBm	ANDREWS DISCONE	2.5	5.7	XMT. PWR. 44.0			
RECEIVER	ECONOM HEXAGON		ANDREWS BICONICAL	0.3	1.2	+ANT. GAINS 2.8			
TOTAL ANT. GAIN (XMT + REC.)		2.5 + 0.3 =		2.8		-CABLE LOSSES 5.7			
TOTAL CABLE LOSS (XMT + REC.)		5.7 + 1.2 =		6.9		=ESP = 34.9 USE 40			
XMT. SITE HEIGHT ABOVE SEA LEVEL		140		FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL	145 FT.		
XMT. ANT. HT. ABOVE GND (FT)	RCVD. PWR. (dBm)		PATH LOSS (dB) = (ESP) - (RCVD. PWR.)		AVG. PATH. LOSS (dB)	NO. OF SAMP	REMARKS		
	TEST	TEST	720218-03	720218-04					
10	104	102	144	142	142.3	4			
15	102	100	142	140	141.3	4			
20	97	97	137	137	137.5	4			
25	94	93	134	133	133.0	4			
30	93	92	133	132	131.5	4			
32	93	93	133	133	133.0	2			
30	90	90	130	130					
25	92	93	132	133					
20	98	98	138	138					
15	97	106	137	146					
10	100	103	140	143					
							END 720218-03 - 1043		
							START 720218-04 - 1047		
							END 720218-04 - 1055		



PROPAGATION PATH LOSS  
DATE: 18 FEBRUARY 72 TEST RUN S/N: 720218-05406  
PATH: WAYSIDE SITE NO. 9 TO ECOM HEXAGON

OPER. FREQ.: 371.4 MHz

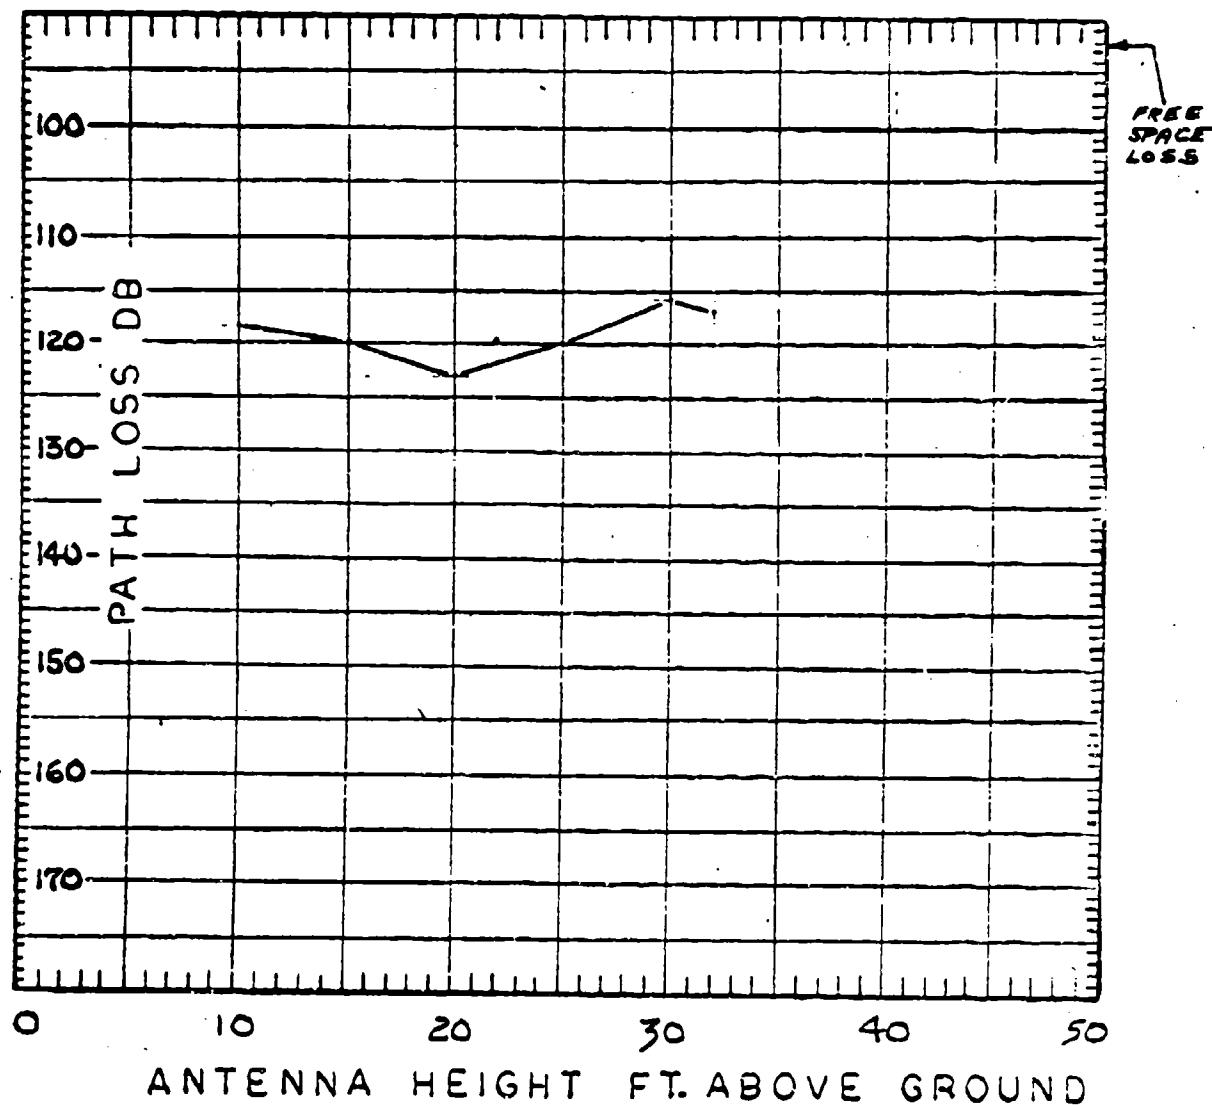


TEST DATA SHEET									
OPER. FREQ.		371.4 MHz		DATE: 18 FEBRUARY 1972		FT.		START: 1129 HRS.	
SITE		LOCATION		XMT. PWR.		TYPE ANTENNA		ANT. GAIN (dB)	
TRANSMITTER		WAYSIDE 9		44 dBm		AT-197		2.0	
RECEIVER		ECOM HEXAGON				AT-197		2.0	
TOTAL ANT. GAIN (XMT + REC.)		2.0 + 2.0 =		4.0		dB		dB	
TOTAL CABLE LOSS (XMT + REC.)		2.3 + 2.3 =		4.6		dB		dB	
XMT. SITE HEIGHT ABOVE SEA LEVEL		140		FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL		140 FT.	
XMT. ANT. HT. ABOVE GND (FT)	RCVD. PWR. (dBm)		PATH LOSS (dB) = (ESP) - (RCVD. PWR.)		AVG. PATH. LOSS (dB)	NO. OF SAMP.	REMARKS		
	TEST	TEST	TEST	TEST					
10	77	76	72218-05	72218-06	118.5	4			
15	77	78	120	119	120.0	4			
20	80	81	123	124	123.0	4			
25	77	77	120	120	120.0	4			
30	73	73	116	116	115.8	4			
32	75	73	118	116	117.0	2			
30	73	72	116	115					
25	77	77	120	120					
20	79	80	122	123					
15	77	76	120	119					
10	74	75	117	118					
							END 720218-05	1135	
							START 720218-06	1135	
							END 720218-06	1146	

# PROPAGATION PATH LOSS

DATE : 18 FEBRUARY 72 TEST RUN S/N: 720218-0708609

PATH: WAYSIDE SITE NO. 9 TO ECOM HEXAGON


OPER. FREQ. : 229.5 MHz

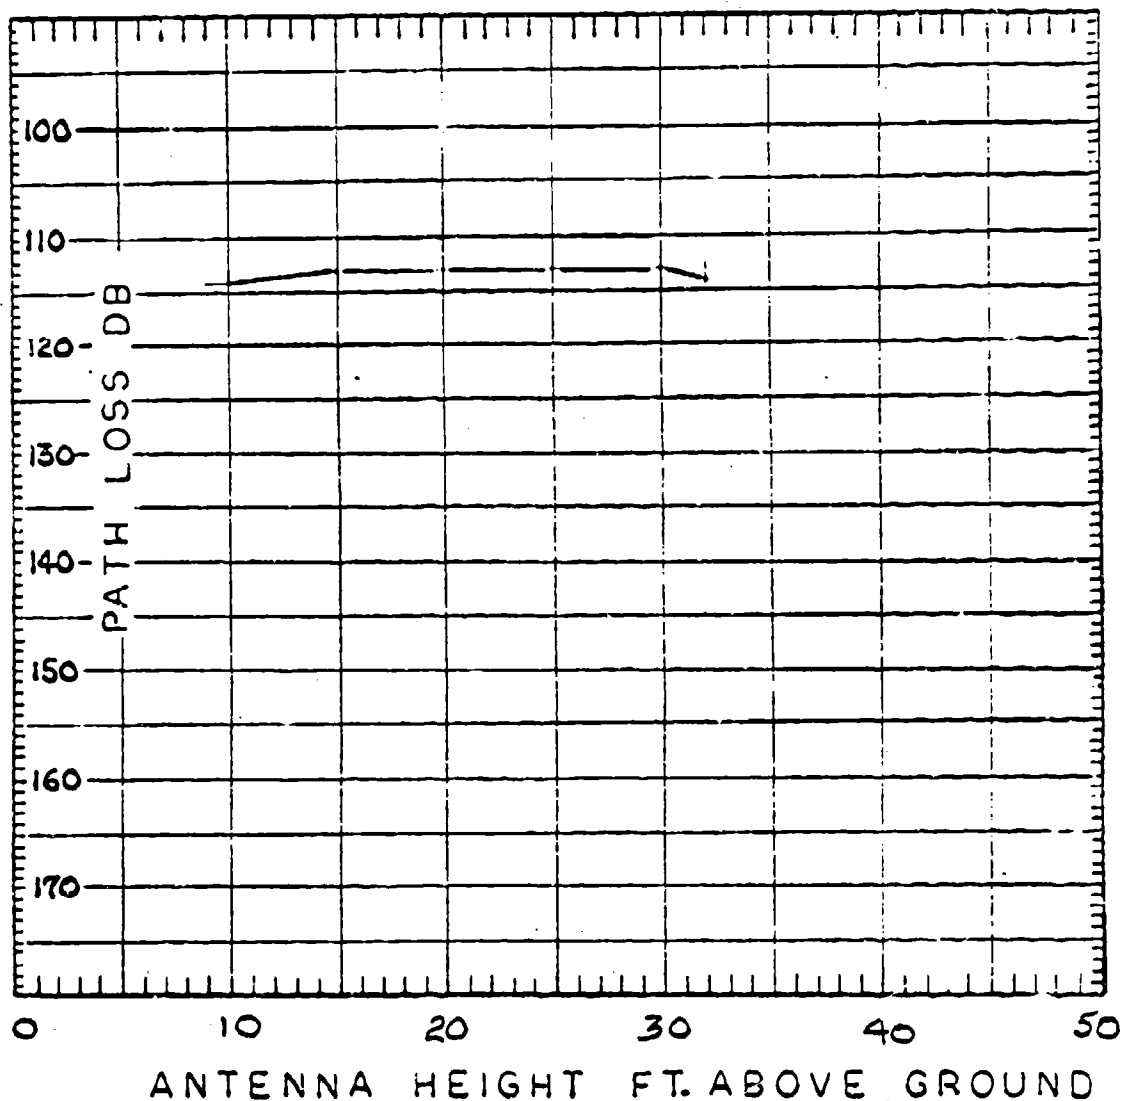



PROPAGATION PATH LOSS  
DATE: 10 MARCH 72 TEST RUN SN: 720310.01402  
PATH: WAYSIDE SITE NO. 19 TO ECOM HEXAGON

OPER. FREQ.: 371.4 MHz

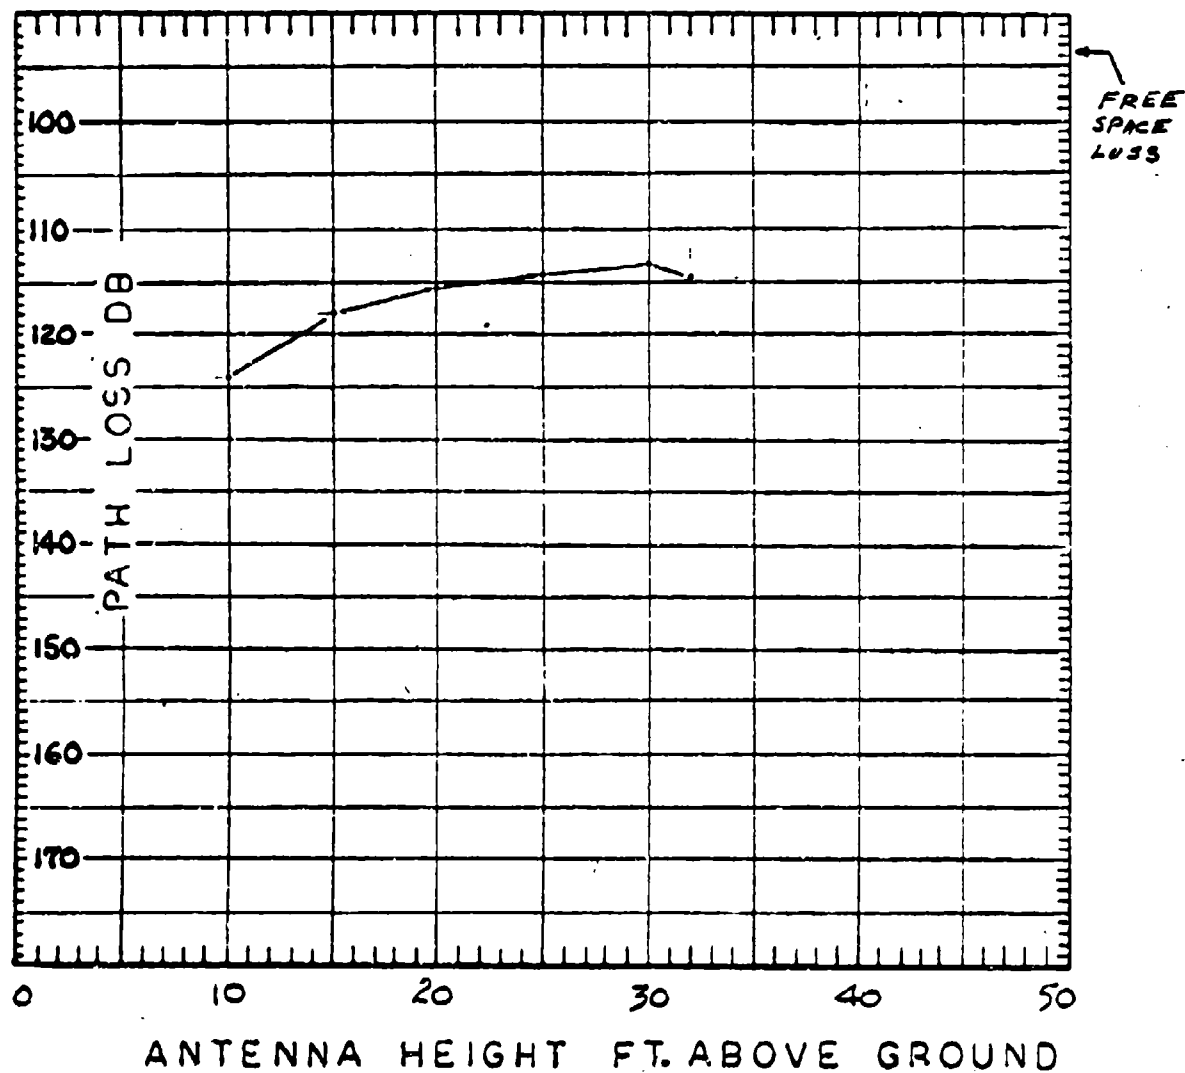


NOTE: AT 197  
ANTENNA



PROPAGATION PATH LOSS  
DATE : 10 MARCH 72 TEST RUN S/N: 720310.03.04  
PATH: WAYSIDE SITE NO. 19 TO ECOM HEXAGON

OPER. FREQ. : 371.4 MHz

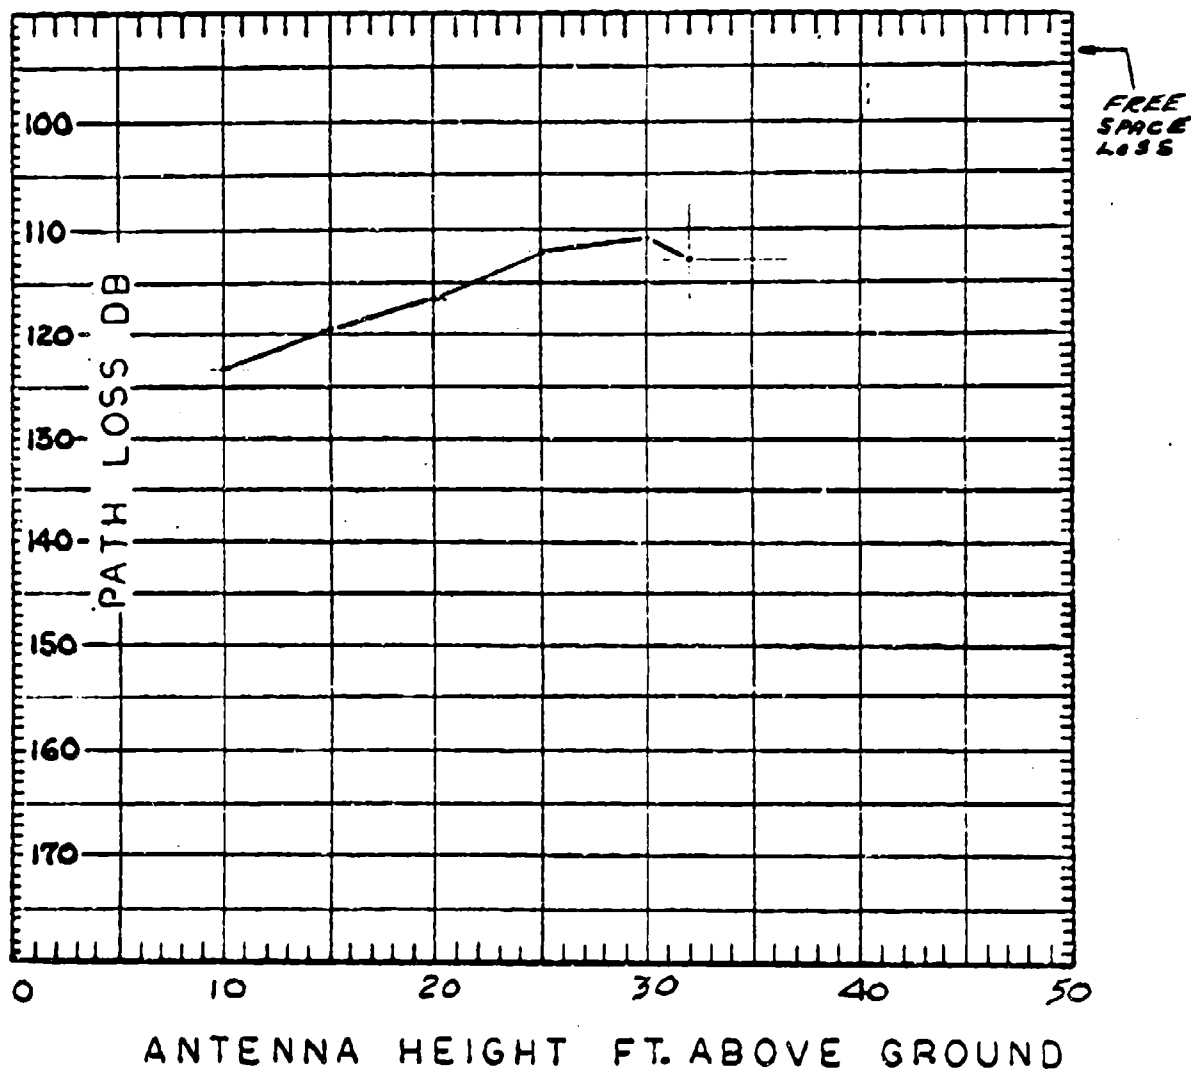

NOTE: AT-197  
ANTENNA






# PROPAGATION PATH LOSS

DATE : 10 MARCH 72 TEST RUN SN: 720310.05406  
PATH: WAYSIDE SITE NO. 19B TO ECOM HEXAGON

OPER. FREQ. : 371.4 MHz

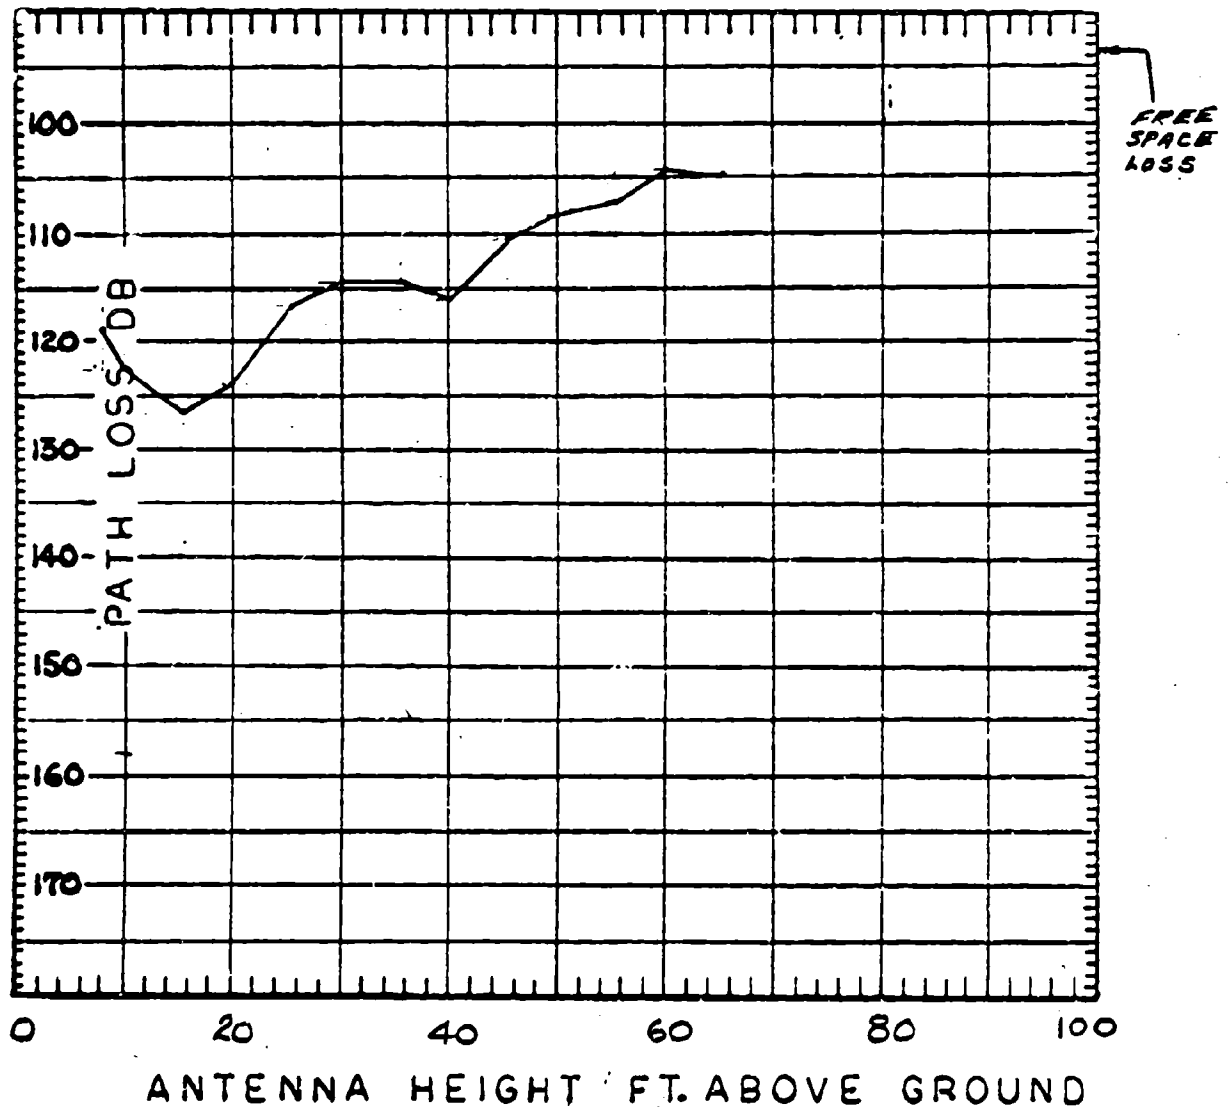

NOTE: AT-197  
ANTENNA

TEST DATA SHEET									
OPER. FREQ.		371.4 MHz		REC. SITE ANT. HT.		FT.		DATE: 10 NOV 1972	
SITE		LOCATION		XMT. PWR.		TYPE ANTENNA		ANT. GAIN (dB)	
TRANSMITTER		WILSON 198		44.6W		AT-197		2.0	
RECEIVER		ECON H/X.				AT-197		2.0	
TOTAL ANT. GAIN (XMT + REC.)		2.0 + 2.0 = 4.0		dB				CABLE LOSSES (dB)	
TOTAL CABLE LOSS (XMT + REC.)		2.3 + 2.3 = 4.6		dB				EQUIV. SYS. PWR. (ESP)	
XMT. SITE HEIGHT ABOVE SEA LEVEL		FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL		FT.		XMT. PWR.	
XMT. ANT. HT. ABOVE GND (FT)		RCVD. PWR. (dBm)		PATH LOSS (dB) = (ESP) - (RCVD. PWR.)		AVG. PATH. LOSS (dB)		NO. OF SAMP	
8		720310.05		720310.05		121		4	
10		75		118		119.0		4	
15		79		122		122.75		4	
20		83		126		126.75		4	
25		81		124		124.0		4	
30		73		116		116.5		4	
35		72		115		114.75		4	
40		70		115		114.75		4	
45		75		119		116.0		4	
50		67		111		110.25		4	
55		66		109		108.5		4	
60		65		107		107.75		4	
65		62		104		104.75		4	
70		62		105		105.00		2	
75		62		105					
80		65		108					
85		65		108					
90		67		108					
95		74		110					
100		70		113					
105		71		114					




# PROPAGATION PATH LOSS

DATE: 10 MARCH 72 TEST RUN SN: 720310.07108

PATH: WAYSIDE SITE NO. 19B TO ECOM HEXAGON

OPER. FREQ.: 371.4

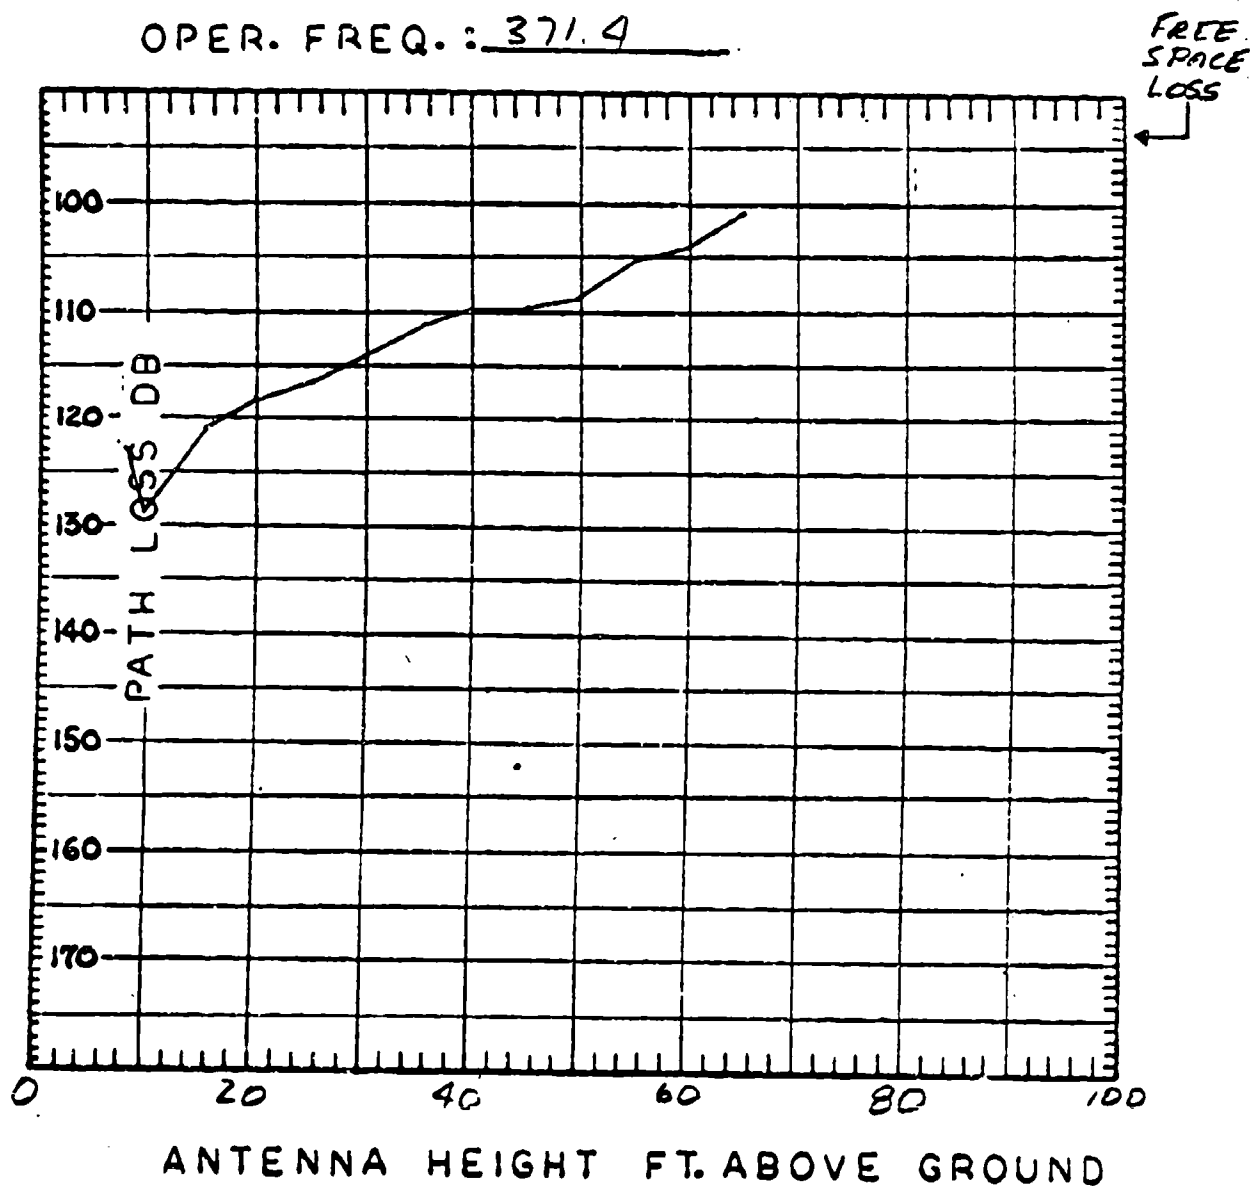


TEST DATA SHEET										DATE: 10 MARCH 1972	
OPER. FREQ. 371.4 MHz		REC. SITE ANT. HT.		FT.		START:		HRS.			
SITE	LOCATION	XMT. PWR.	TYPE ANTENNA	ANT. GAIN (dB)	CABLE LOSSES (dB)	EQUIV. SYS. PWR. (ESP)					
TRANSMITTER	Wayside RD	49 dBm	EMCO 3101	6.1	2.3	44					
RECEIVER	Ecom Hex		AT-197	2.0	2.3	8.1					
TOTAL ANT. GAIN (XMT + REC.)		6.1 + 2.0 = 8.1		dB							
TOTAL CABLE LOSS (XMT + REC.)		2.3 + 2.3 = 4.6		dB							
XMT. SITE HEIGHT ABOVE SEA LEVEL		FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL		FT.					
XMT. ANT. HT. ABOVE GND (FT)	RCVD. PWR. (dBm)	TEST	TEST	TEST	PATH LOSS (dB) = (ESP) - (RCVD. PWR.)	AVG. PATH. LOSS (dB)	NO. OF SAMP	REMARKS			
8	75	720310.07	720310.08	720310.09	123	124	123.75	4			
10	81		80		129	128	128.00	4			
15	77		73		125	121	121.75	4			
20	70		72		118	120	118.75	4			
25	68		69		116	117	116.50	4			
30	66		66		114	114	114.00	4			
35	63		63		111	111	111.25	4			
40	62		62		110	110	109.75	4			
45	62		61		110	109	109.75	4			
50	60		60		108	108	108.25	4			
55	59		58		107	106	105.25	4			
60	58		57		106	105	104.25	4			
65	57		56		99	104	101.50	2			
60	58		57		101	105					
55	59		58		102	106					
50	61		60		109	108					
45	62		60		110	108					
40	62		61		110	109					
35	64		63		112	111					
30	66		66		114	114					



# PROPAGATION PATH LOSS

DATE : 10 MARCH 72 TEST RUN S/N: 720310.09; 10  
PATH: WAYSIDE SITE 19B TO ECOM HEXAGON

OPER. FREQ. : 229.5 MHz

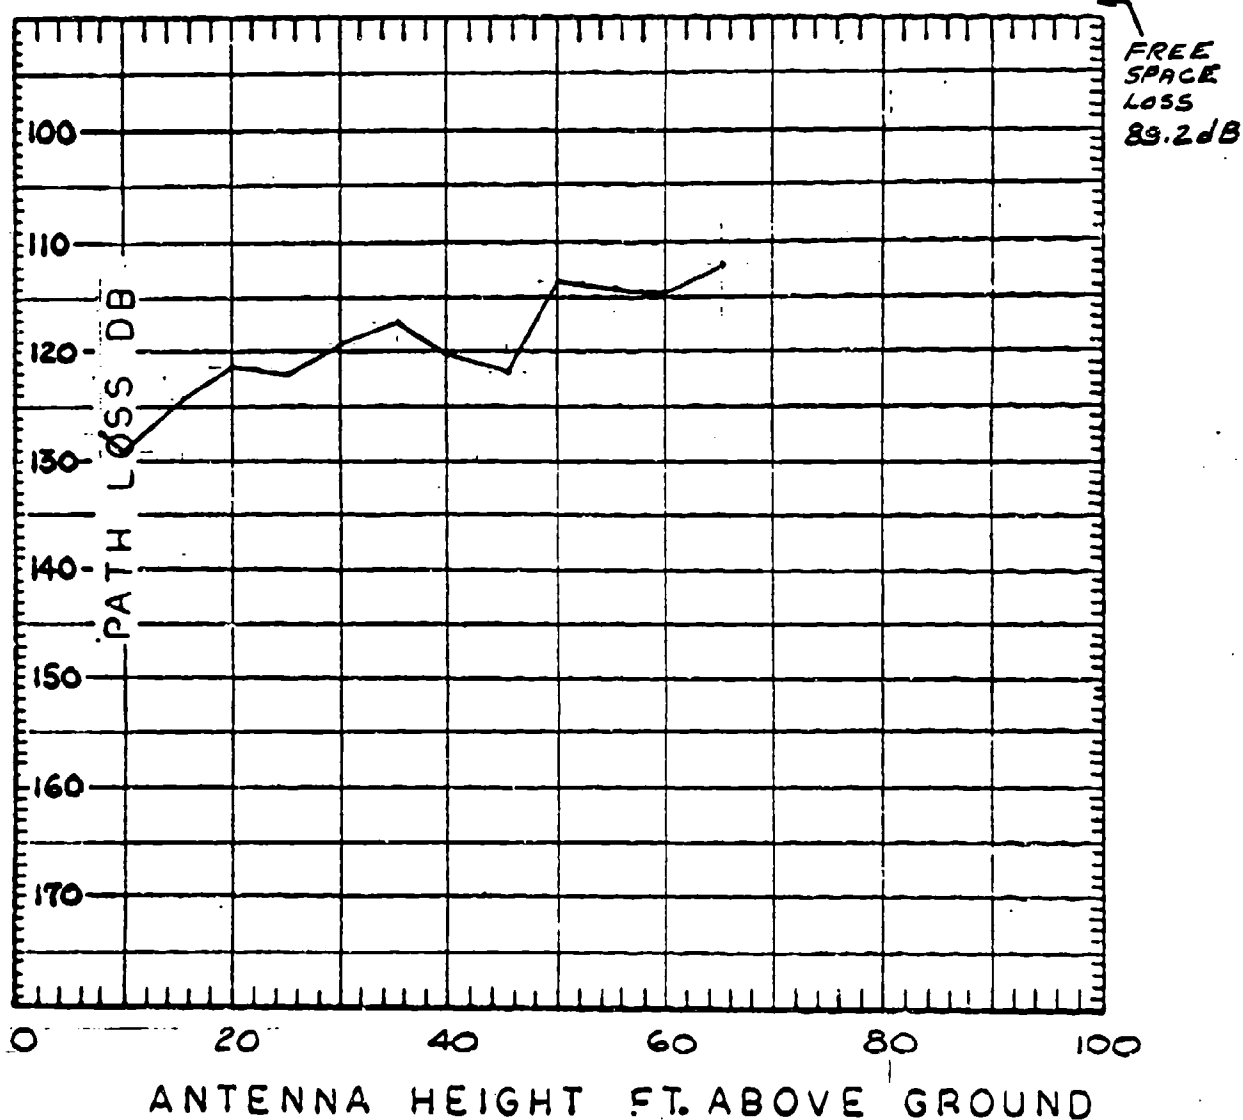

NOTE: EMCO 3101 ANT.  
CIRCULAR POLARIZED

TEST DATA SHEET									
OPER. FREQ. <u>229.5 MHz</u>		DATE: <u>10 MARCH 72</u>		REC. SITE ANT. HT. <u>FT.</u>		START: <u>MRS.</u>			
SITE	LOCATION	XMT. PWR.	TYPE ANTENNA	ANT. GAIN (dB)	CABLE LOSSES (dB)	EQUIV. SYS. PWR. (ESP)			
TRANSMITTER	WYDSIDE 19B	44dBm	EMCO 3101	-3.8	1.8	XMT. PWR. 44			
RECEIVER	ECOM HEX.		AT-197	2.0	1.8	+ANT. GAINS -1.8			
TOTAL ANT. GAIN (XMT + REC.)		-3.8 + 2.0 = -1.8		dB		-CABLE LOSSES 3.6			
TOTAL CABLE LOSS (XMT + REC.)		1.8 + 1.8 = 3.6		dB		-ESP = 38.6 USE 39			
XMT. SITE HEIGHT ABOVE SEA LEVEL <u>FT.</u>		RCVR. ANT. HEIGHT ABOVE SEA LEVEL <u>FT.</u>							
XMT. ANT. HT ABOVE GND (FT)	RCVD. PWR. (dBH)		PATH LOSS (dB) = (ESP) - (RCVD. PWR.)		AVG. PATH. LOSS (dB)	NO. OF SAMPL	REMARKS		
	TEST	TEST	TEST	TEST					
8	72.3	72.3	72.3	72.3	121.25	4			
10	71	71	71	71	129.00	4			
15	87	87	87	87	124.50	4			
20	85	85	85	85	121.75	4			
25	82	82	82	82	122.25	4			
30	80	80	80	80	119.75	4			
35	79	79	79	79	117.25	4			
40	81	81	81	81	120.50	4			
45	85	85	85	85	122.00	4			
50	75	75	75	75	113.75	4			
55	75	75	75	75	114.00	4			
60	76	76	76	76	114.75	4			
65	73	73	73	73	112.00	2			
70	76	76	76	76					
75	75	75	75	75					
80	75	75	75	75					
85	81	81	81	81					
90	81	81	81	81					
95	82	82	82	82					
100	82	82	82	82					






# PROPAGATION PATH LOSS

DATE : 10 MARCH 72 TEST RUN S/N: 720310.11

PATH: WAYSIDE SITE NO 19B TO ECCM HEXAGON

OPER. FREQ.: 229.5 MHz

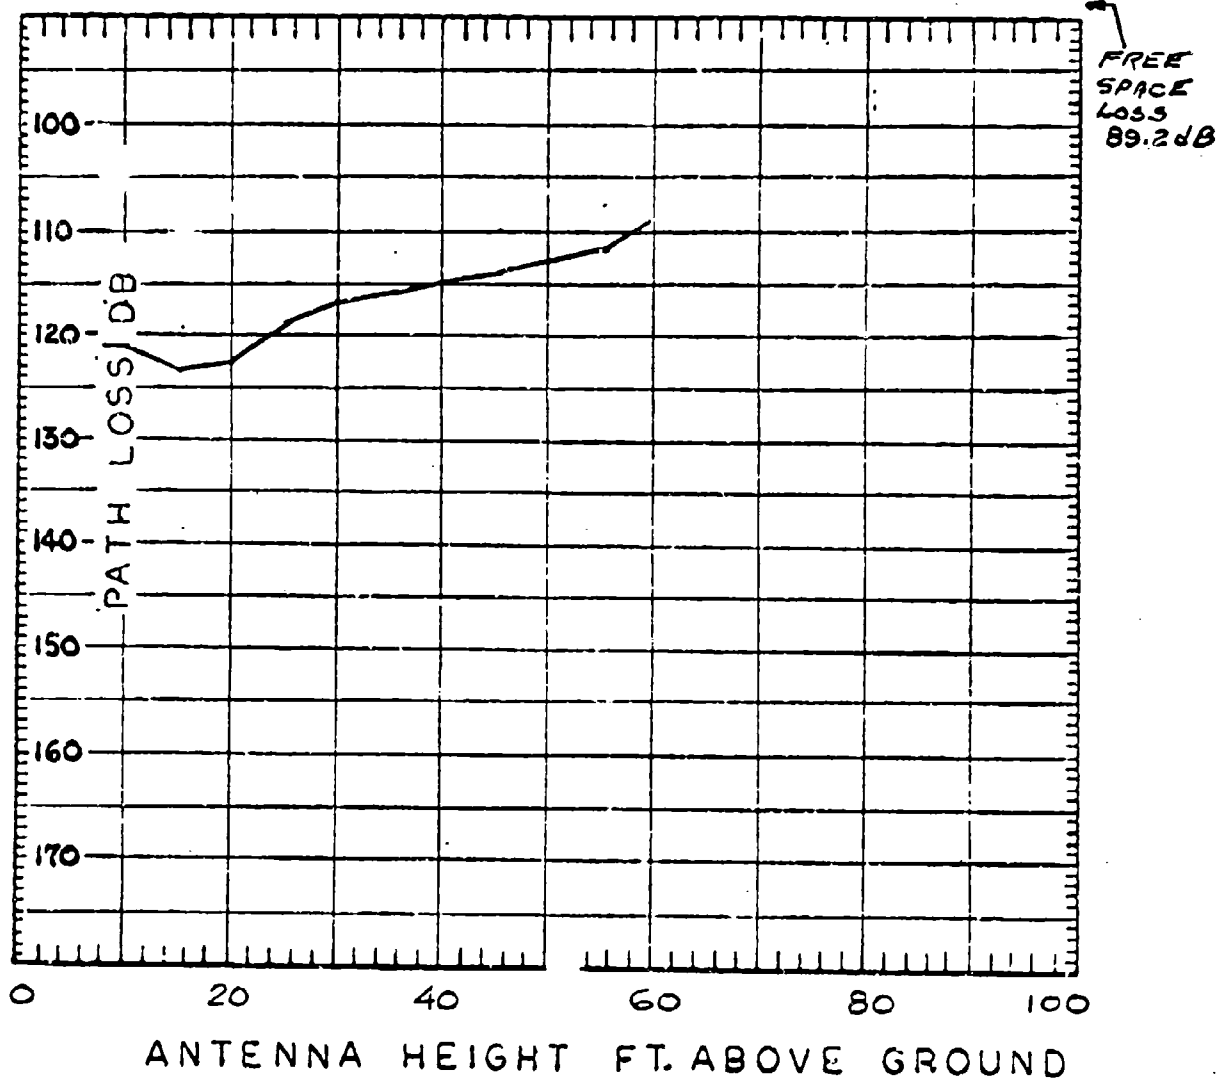

NOTE: T-29 ANT.  
VERT. POLARIZED


TEST DATA SHEET									
OPER. FREQ.		229.5 MHz		DATE: 10 MARCH 72		START: _____		HRS. _____	
SITE		LOCATION		REC. SITE ANT. HT. _____ FT.		ANT. GAIN (dB)		CABLE LOSSES (dB)	
TRANSMITTER		Wayside 19B		TYPE ANTENNA		ANT. GAIN (dB)		EQUIV. SYS. PWR. (ESP)	
RECEIVER		ECOM Hex.		PWR. 44dBm		729 VERT.		XMTR. PWR. 44	
TOTAL ANT. GAIN (XMTR + REC.)		8.0 + 1.2 = 9.2		ANT. GAIN (dB)		1.8		+ANT. GAINS 9.2	
TOTAL CABLE LOSS (XMTR + REC.)		1.8 + 1.8 = 3.6		RCVR. ANT. HEIGHT ABOVE SEA LEVEL _____ FT.		-CABLE LOSSES 3.6		-ESP = 19.6 USE 19	
XMTR. SITE HEIGHT ABOVE SEA LEVEL _____ FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL _____ FT.		PATH LOSS (dB) = (ESP) - (RCVD. PWR.)		AVG. PATH. LOSS (dB)		NO. OF SAMP	
TEST		TEST		TEST		TEST		TEST	
720310.11	71	71	71	720310.11	121	121.0	2		
71	71	71	71	121	121.0	121.0	2		
73	73	73	73	123	123.5	123.5	2		
73	73	73	73	123	123.0	123.0	2		
69	69	69	69	119	119.0	119.0	2		
67	67	67	67	117	117.0	117.0	2		
66	66	66	66	116	116.0	116.0	2		
65	65	65	65	115	115.0	115.0	2		
64	64	64	64	114	114.0	114.0	2		
63	63	63	63	113	113.0	113.0	2		
62	62	62	62	112	112.0	112.0	2		
59	59	59	59	109	109.0	109.0	1		
62	62	62	62	112	112.0	112.0	2		
63	63	63	63	113	113.0	113.0	2		
64	64	64	64	114	114.0	114.0	2		
65	65	65	65	115	115.0	115.0	2		
66	66	66	66	116	116.0	116.0	2		
67	67	67	67	117	117.0	117.0	2		
69	69	69	69	119	119.0	119.0	2		
73	73	73	73	123	123.0	123.0	2		



# PROPAGATION PATH LOSS

DATE : 10 MARCH 72 TEST RUN S/N: 720310.12  
PATH: WAYSIDE SITE NO. 19B TO ECON/HEXAGON

OPER. FREQ. : 229.5 MHz

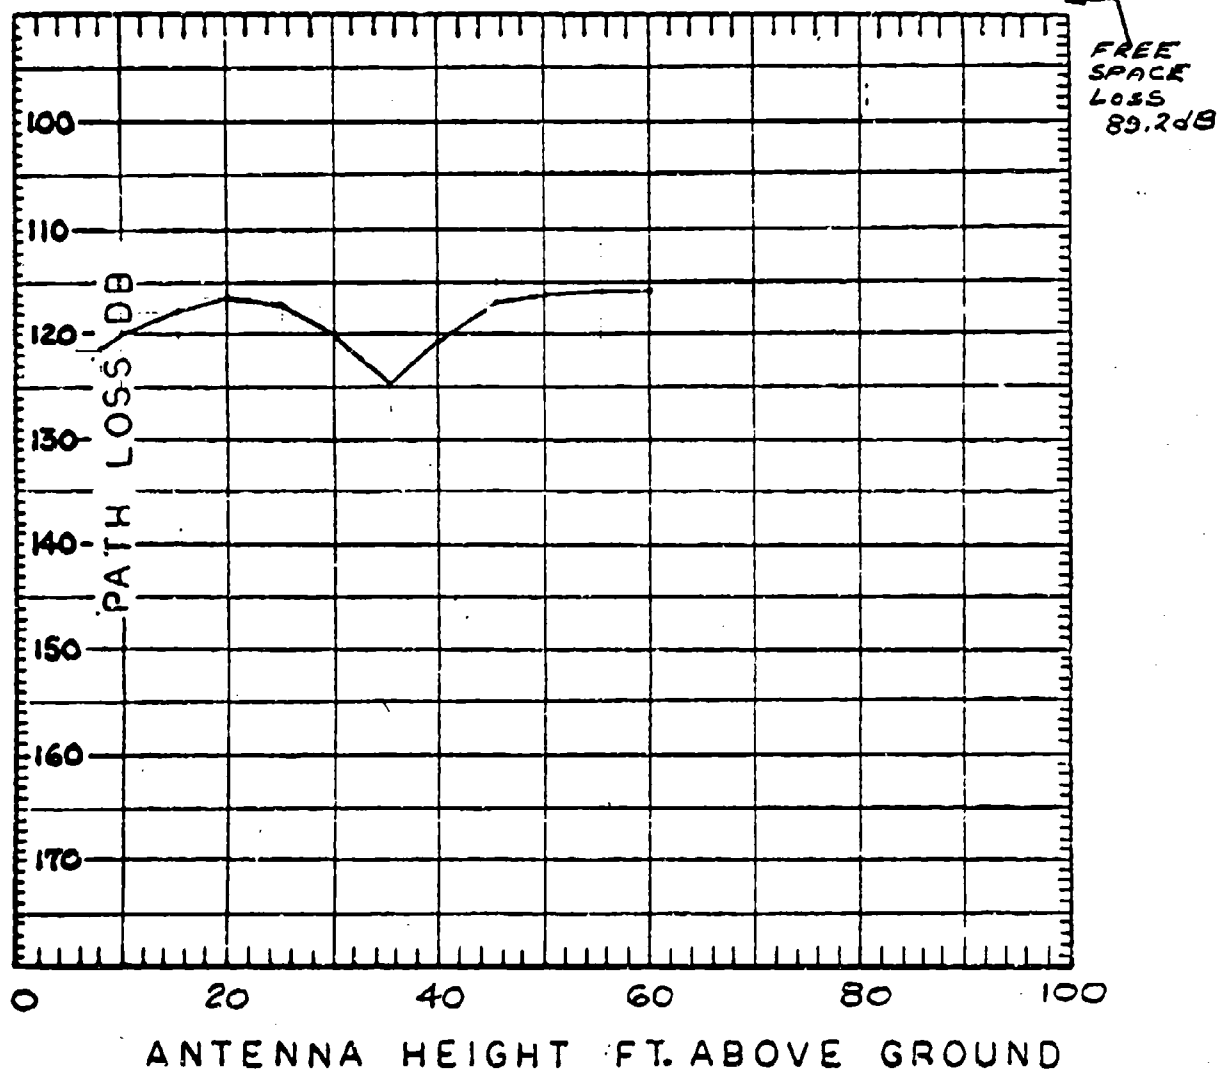

NOTE: T-29 ANT.  
HORIZ. POLARIZED

TEST DATA SHEET									
OPER. FREQ.		229.5 MHR		DATE: 10 MARCH 72		START: MRS.		FT.	
SITE		LOCATION		XMT. PWR.		TYPE ANTENNA		ANT. GAIN (dB)	
TRANSMITTER		WYYSIDE 19B		41 dBm		F-29 HARR		8.0	
RECEIVER		ECOM HEX.				AT-197		1.2	
TOTAL ANT. GAIN (XMT. + REC.)		8.0 + 1.2 = 9.2						dB	
TOTAL CABLE LOSS (XMT. + REC.)		1.8 + 1.8 = 3.6						dB	
XMT. SITE HEIGHT ABOVE SEA LEVEL		FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL		FT.			
XMT. ANT. HT. ABOVE GND (FT)	RCVD. PWR. (dBm)		PATH LOSS (dB) = (ESP) - (RCVD. PWR.)		AVG. PATH. LOSS (dB)	NO. OF SAMP	REMARKS		
	TEST	TEST	TEST	TEST					
720310.12									
8	75		720310.12		121.50	2			
10	71		121		120.0	2			
15	72		118		118.0	2			
20	70		116		116.5	2			
25	71		117		117.5	2			
30	74		120		120.0	2			
35	79		125		125.0	2			
40	74		120		120.5	2			
45	71		117		117.0	2			
50	70		116		116.5	2			
55	70		116		116.0	2			
60	70		116		116.0	1			
55	70		116						
50	71		117						
45	71		117						
40	74		121						
35	79		125						
30	74		120						
25	72		118						
20	71		117						


[illegible]

# PROPAGATION PATH LOSS

DATE: 10 MARCH 72 TEST RUN S/N: 720310.13

PATH: WAYSIDE SITE NO. 19B TO ECOM HEXAGON 711

OPER. FREQ.: 371.4 MHz

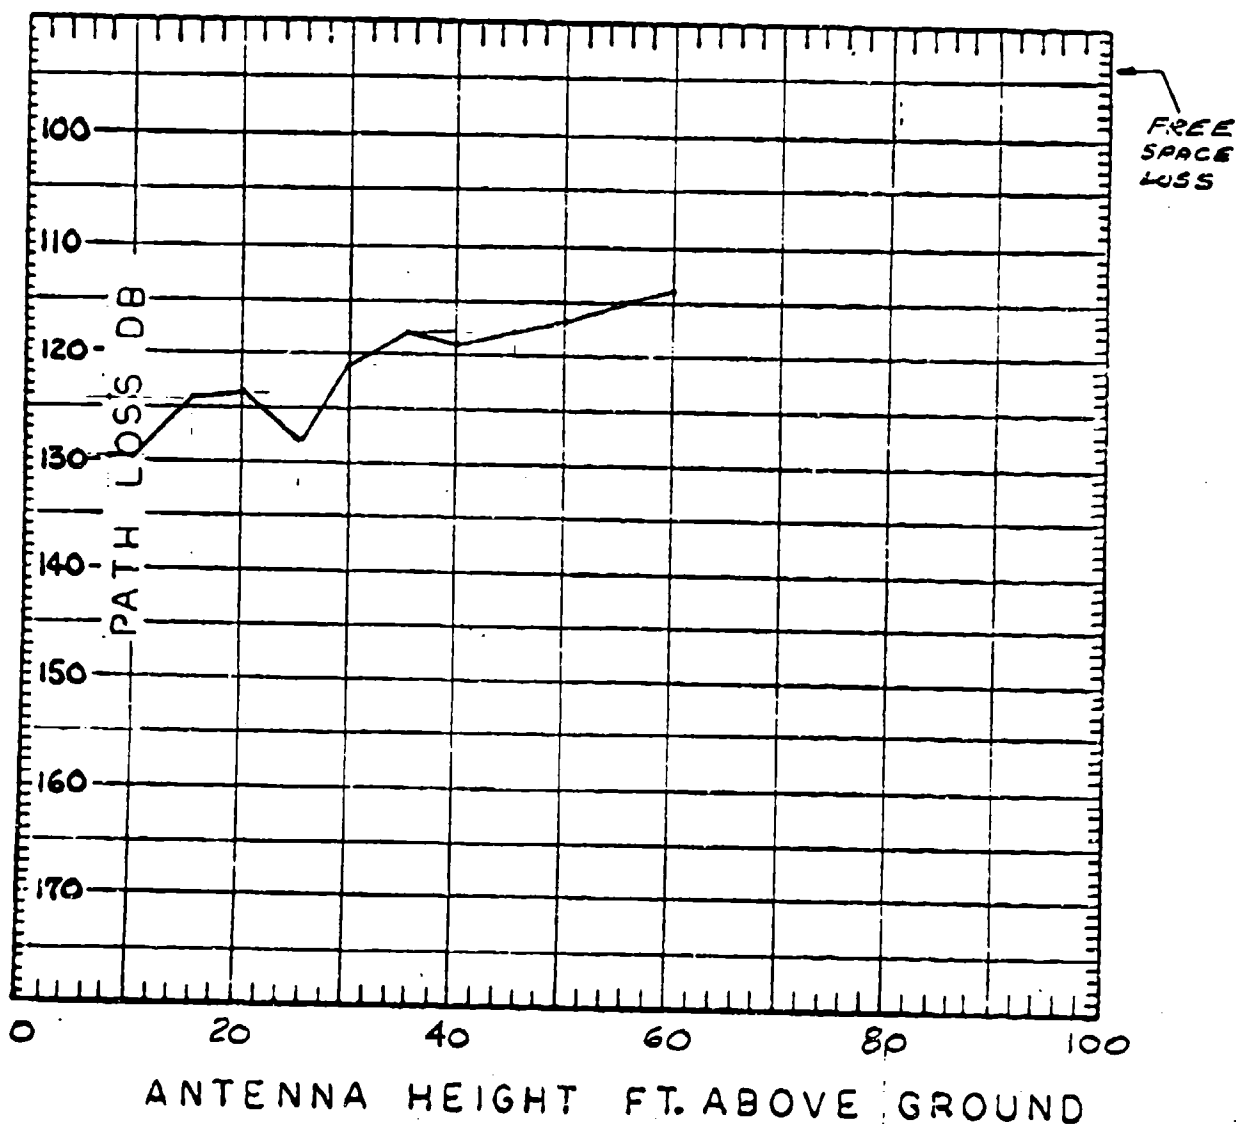

NOTE: T-29 ANT.  
HORIZ. POLARIZED




TEST DATA SHEET									
OPER. FREQ.		371.4 MHz		DATE: 10 MARCH 72		MRS.			
SITE		LOCATION		REC. SITE ANT. HT.		FT.		START:	
TRANSMITTER		WIRYSIDE 19B	440RM	T-29 H6R12	8.0	CABLE LOSSES (dB)	2.3	EQUIV. SYS. PWR. (ESP)	44
RECEIVER		EOM HEX.		AT-197	2.0	CABLE LOSSES (dB)	2.3	+ANT. GAINS	10
TOTAL ANT. GAIN (XMT + REC.)		8.0 + 2.0 = 10.0		dB				-CABLE LOSSES 4.6	
TOTAL CABLE LOSS (XMT + REC.)		2.3 + 2.3 = 4.6		dB				-ESP = -49.4 USE 49	
XMT. SITE HEIGHT ABOVE SEA LEVEL		FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL		FT.			
XMT. ANT. HT. ABOVE GND (FT)	RCVD. PWR. (dBm)		PATH LOSS (dB) = (ESP) - (RCVD. PWR.)		AVG. PATH. LOSS (dB)	NO. OF SAMP	REMARKS		
	TEST	TEST	TEST	TEST					
8	72.03	10.13			129.5	2			
10	81				129.5	2			
11	91				124.5	2			
20	76				124.0	2			
25	75				128.0	2			
30	79				121.0	2			
35	72				118.0	2			
40	69				119.0	2			
45	68				118.0	2			
50	68				117.0	2			
55	66				115.0	2			
60	65				114.0	1			
65	66								
70	68								
75	69								
80	72								
85	75								
90	74								

[illegible]

PROPAGATION PATH LOSS

DATE: 10 MARCH 72 TEST RUN SN: 720310.14  
PATH: WAYSIDE SITE No. 128 TO ECOM HEXAGON

OPER. FREQ.: 371.4 MHz

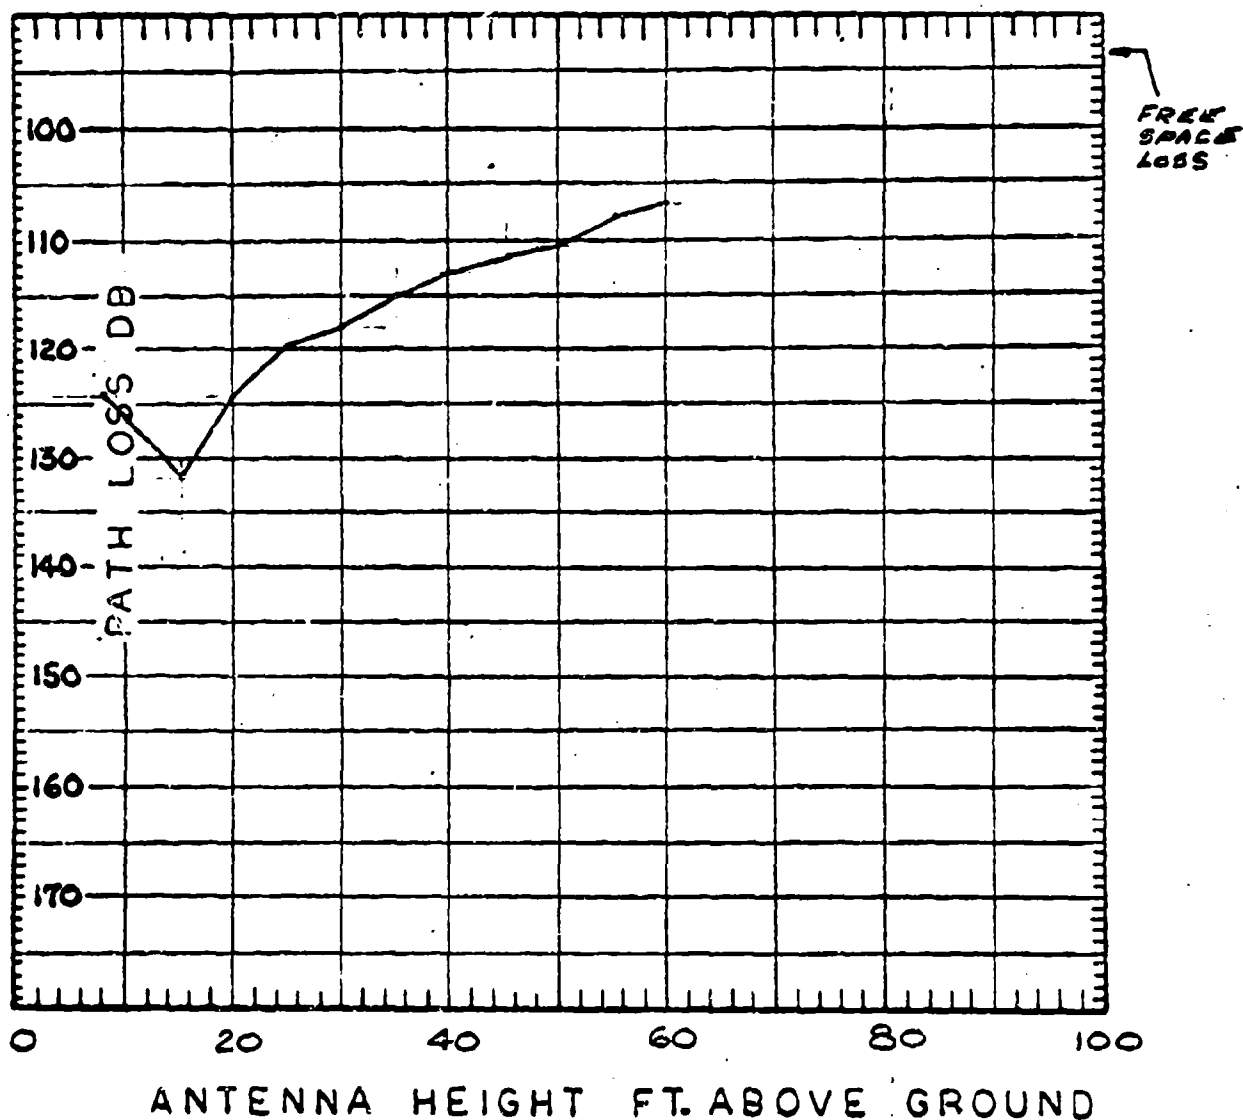

NOTE: T-29 ANT.  
VERT. POLARIZED

TEST DATA SHEET									
OPER. FREQ.		371.4 MHz		DATE: 10 MAR 11 72.		START: _____		HRS. _____	
SITE		LOCATION		REC. SITE ANT. HT. _____ FT.		ANT. GAIN (dB)		CABLE LOSSES (dB)	
TRANSMITTER		W4 "SIDE 19B"		XMT. PWR. 44 dBm		TYPE ANTENNA T-29 VERT		EQUIV. SYS. PWR. (ESP) 14	
RECEIVER		ECOM HEX.		XMT. PWR. 44 dBm		TYPE ANTENNA AT-197		XMT. PWR. 10	
TOTAL ANT. GAIN (XMT + REC.)		8.0 + 2.0 = 10.0		dB		dB		+ANT. GAINS 10	
TOTAL CABLE LOSS (XMT + REC.)		2.3 + 2.3 = 4.6		dB		dB		-CABLE LOSSES 4.6	
XMT. SITE HEIGHT ABOVE SEA LEVEL _____ FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL _____ FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL _____ FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL _____ FT.		-ESP = 49.1 dB 19	
XMT. ANT. HT. ABOVE GND (FT)	RCVD. PWR. (dBm)	TEST	TEST	TEST	TEST	TEST	TEST	TEST	TEST
720310.14									
8	75								
10	77								
15	83								
20	75								
25	71								
30	69								
35	66								
40	64								
45	62								
50	61								
55	59								
60	58								
65	57								
70	62								
75	64								
80	66								
85	69								
90	71								
95	76								


[illegible]

# PROPAGATION PATH LOSS

DATE: 13 MARCH 72 TEST RUN S/N: 720313.01/02

PATH: NOYSELE SITE No. 19 TO ECCM HEX. 17311

OPER. FREQ.: 15.5 MHz

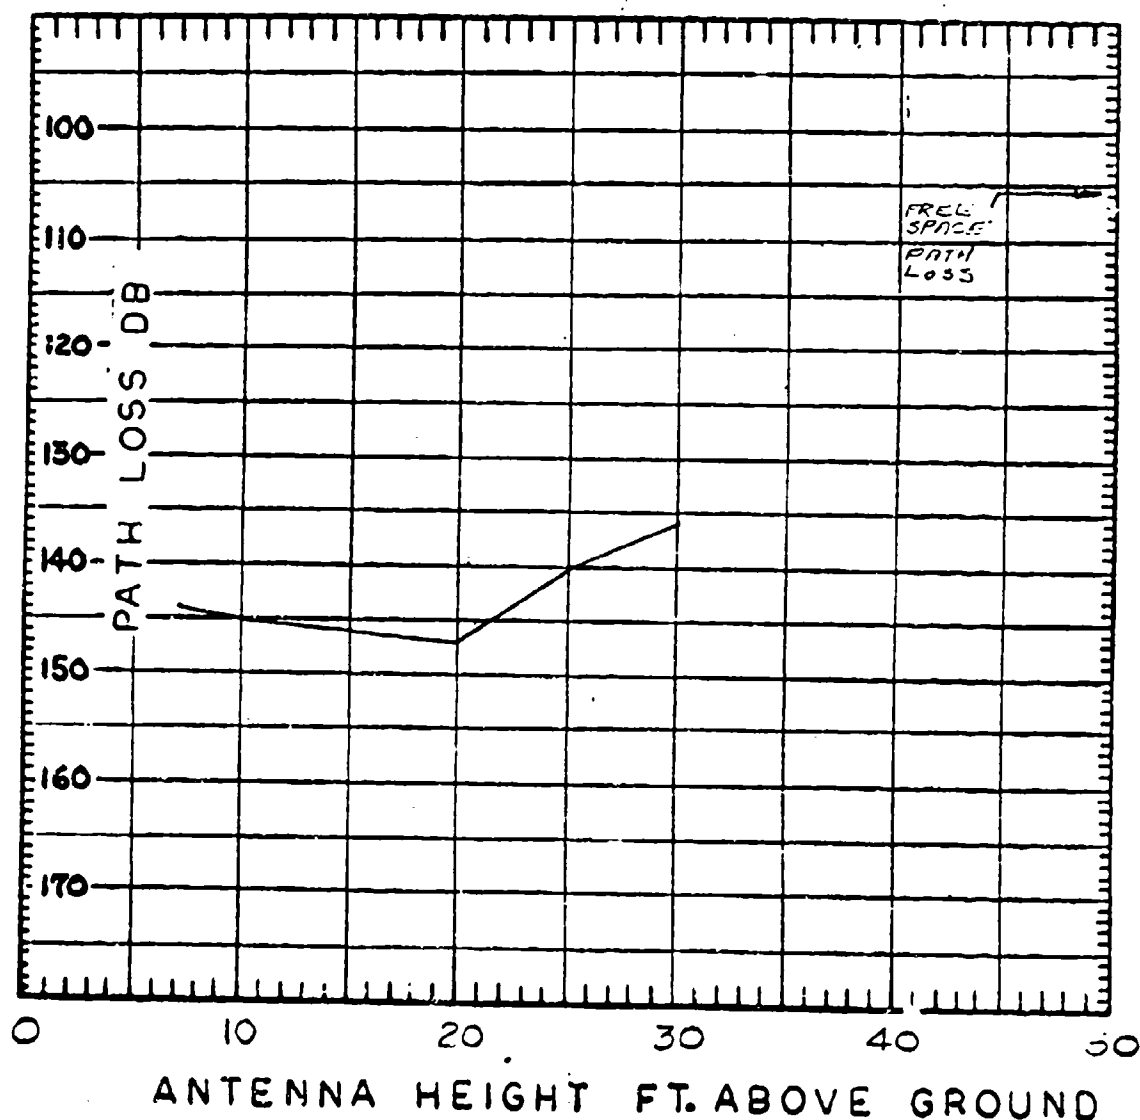




# PROPAGATION PATH LOSS

DATE: 13 MARCH 72 TEST RUN S/N: 720313.03:04

PATH: WAYSIDE SITE NO. 19 TO ECOM HEXAGON

OPER. FREQ.: 15.15 MHz

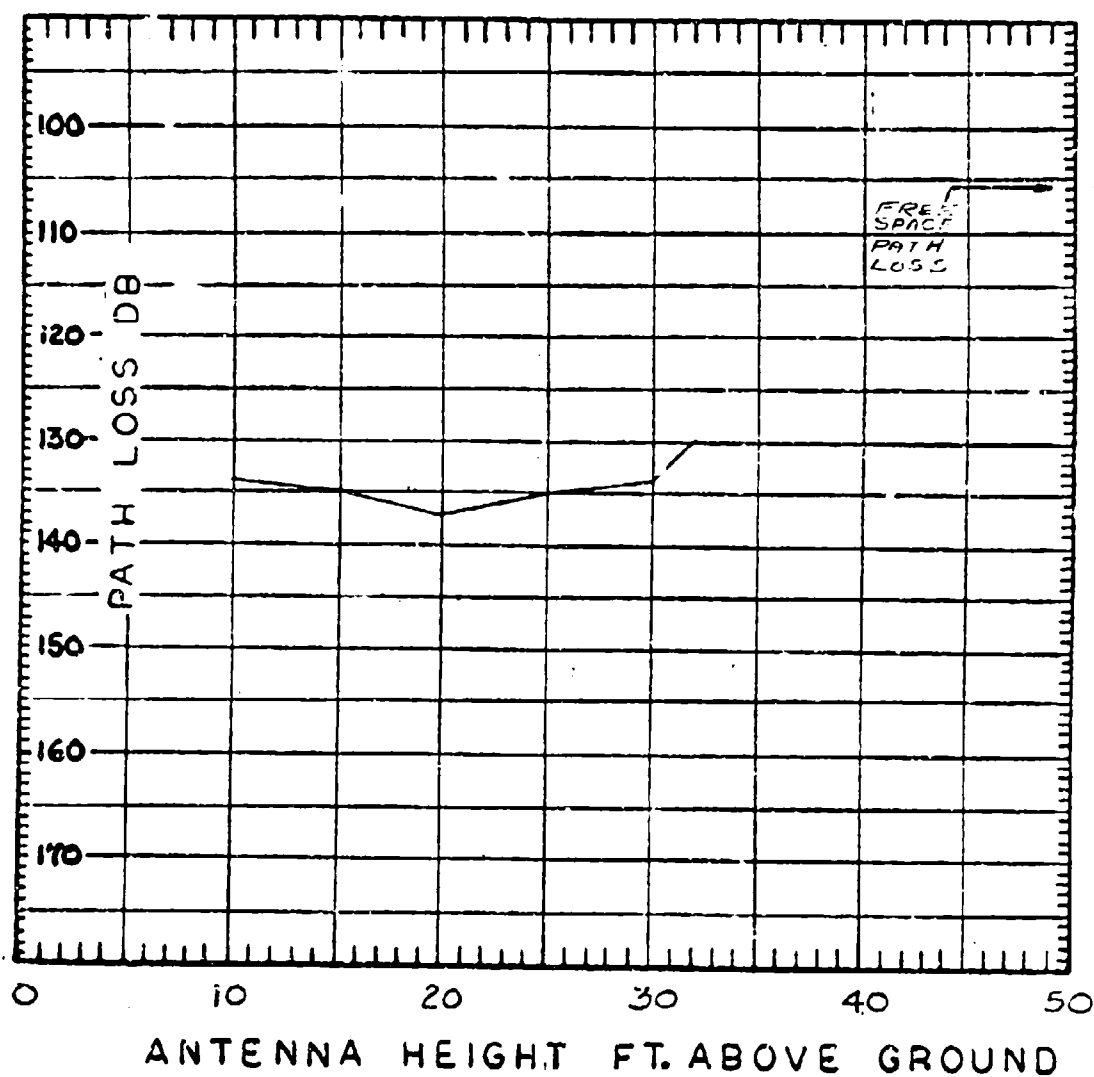




TEST DATA SHEET									
OPER. FREQ.		1545 MHZ		DATE: 13 MARCH 72		FT.		MRS.	
SITE		LOCATION		REC. SITE ANT. HT.		ANT. GAIN (dB)		EQUIV. SYS. PWR. (ESP)	
TRANSMITTER		WINDSIDE 19		44 dB		2.5		44	
RECEIVER		ECOM HX.				0.3		2.8	
TOTAL ANT. GAIN (XMT + REC.)		2.5 + 0.3 = 2.8				dB		6.9	
TOTAL CABLE LOSS (XMT + REC.)		5.7 + 1.2 = 6.9				dB		40	
XMT. SITE HEIGHT ABOVE SEA LEVEL		FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL		FT.			
XMT. ANT. HT. ABOVE GND (FT)	RCVD. PWR. (dBm)		PATH LOSS (dB) = (ESP) - (RCVD. PWR.)		AVG. PATH. LOSS (dB)	NO. OF SAMP	REMARKS		
	TEST	TEST	TEST	TEST					
10	72.3, 13.03	98	120.3, 13.04	141	138	4			
15	97	94		137	134	4			
20	98	97		138	137	4			
25	92	93		132	133	4			
30	95	98		135	138	4			
32	93	88		133	128	2			
35	91	92		131	132				
25	97	96		137	136				
20	96	97		136	137				
15	95	94		135	134				
10	91	101		137	131				
							Pos. PEAK AVERAGE OF STRIP CHART RECORDINGS		

# PROPAGATION PATH LOSS

DATE: 13 MARCH 72 TEST RUN S/N: 720313.06197  
 PATH: WAYSIDE SITE NO. 19B TO ECOM HET/AGOI

OPER. FREQ.: 154.5 MHz

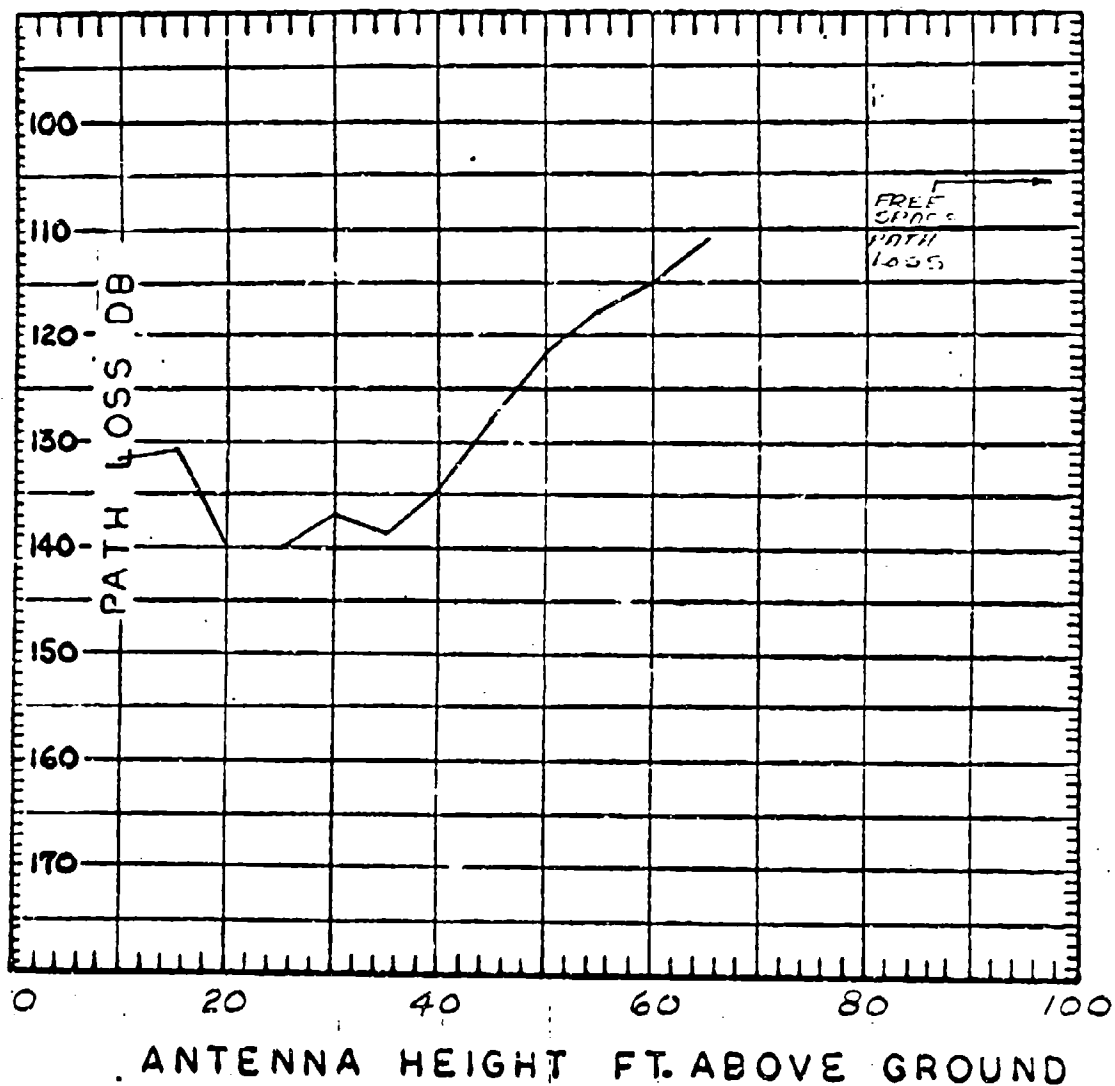

TEST DATA SHEET									
OPER. FREQ. <u>1545 MHz</u>		DATE: <u>13 MARCH 72</u>		HRS. <u>START:</u>		FT. <u>START:</u>		HRS. <u>START:</u>	
SITE	LOCATION	XMIT. PWR. (dBm)	TYPE ANTENNA	ANT. GAIN (dB)	CABLE LOSSES (dB)	EQUIV. SYS. PWR. (ESP)	XMIT. PWR. (dBm)	+ANT. GAINS	-CABLE LOSSES
TRANSMITTER	WAYSIDE 19B	44 dBm	HORN	14.4	5.7	44			
RECEIVER	ECON HEX		ANDREW BIGANICAL	0.3	1.2	14.7			
TOTAL ANT. GAIN (XMIT + REC.)		14.4 + 0.3 = 14.7		dB					
TOTAL CABLE LOSS (XMIT + REC.)		5.7 + 1.2 = 6.9		dB					
XMIT. SITE HEIGHT ABOVE SEA LEVEL		110		FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL		140	
XMIT. ANT. HT. ABOVE GND (FT)		TEST		TEST		PATH LOSS (dB) = (ESP) - (RCVD. PWR.)		AVG. PATH. LOSS (dB)	
7203, 13.06		7203, 13.07		7203, 13.06		7203, 13.07		NO. OF SAMPL	
10	90	93		142	142	132	4		
15	90	92		138	131	131	4		
20	86	90		138	139	140	4		
25	87	88		137	137	140	4		
30	87	90		136	139	137	4		
35	87	90		136	139	137	4		
40	87	85		135	134	135	4		
45	77	75		129	127	128	4		
50	69	74		121	123	122	4		
55	65	69		117	118	115	4		
60	62	65		114	114	115	4		
65	59	62		111	111	111	2		
70	64	65		116	114				
75	64	65		117	117				
80	72	72		124	121				
85	71	78		129	121				
90	86	86		137	135				
95	90	11		142	140				
100	86	87		134	136				
105	70	71		132	140				


MEAN READING CHARTS



PROPAGATION PATH LOSS

DATE: 13 MARCH 72 TEST RUN SN: 720313.08409  
PATH: WAYSIDE SITE NO. 19B TO ECOM HEXAGON

OPER. FREQ.: 1545 MHz

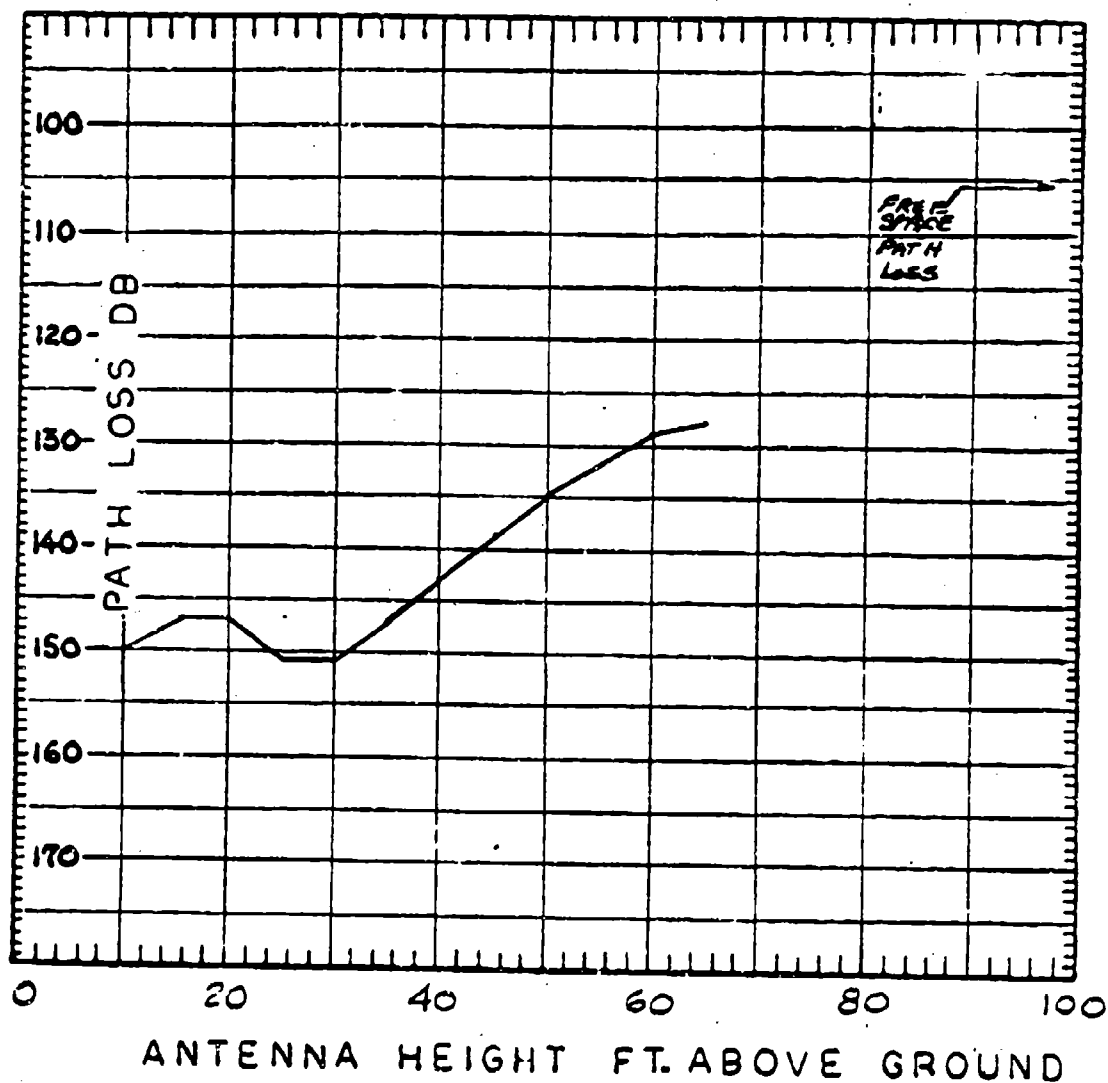

TEST DATA SHEET									
OPER. FREQ.		1545 MHz		DATE: 13 MARCH 72		REC. SITE ANT. HT.		FT.	
SITE		LOCATION		XMT. PWR.		TYPE ANTENNA		ANT. GAIN (dB)	
TRANSMITTER		WAYSIDE 198		415M		EMER		-0.4	
RECEIVER		EGOMILEX.		1545		BICONICAL		0.3	
TOTAL ANT. GAIN (XMT + REC.)				-0.4 + 0.3 =				-0.1 dB	
TOTAL CABLE LOSS (XMT + REC.)				5.7		1.2		6.9 dB	
XMT. SITE HEIGHT ABOVE SEA LEVEL		140		RCVR. ANT. HEIGHT ABOVE SEA LEVEL		140		FT.	
XMT. ANT. HT. ABOVE GND (FT)	RCVD. PWR. (dBm)		PATH LOSS (dB) = (ESP) - (RCVD. PWR.)		AVG. PATH. LOSS (dB)	NO. OF SAHP	REMARKS		
	TEST	TEST	TEST	TEST					
10	72.3/3.10			72.3/3.10	141	2			
15	97			140	133	2			
20	96			130	130.5	2			
25	96			130	130.0	2			
30	98			132	131.0	2			
35	97			131	130.5	2			
40	95			129	128.0	2			
45	96			130	128.5	2			
50	87			121	121.5	2			
55	83			117	118.0	2			
60	81			115	116.0	2			
65	80			114	114.0	1			
70	83			117					
75	85			119					
80	88			122					
85	93			127					
90	93			127					
95	94			130					
100	94			130					
105	96			130					

TEST DATA SHEET									
OPER. FREQ. <u>1545 MHz</u>		DATE: <u>13 MARCH 72</u>		REC. SITE ANT. HT. <u>FT.</u>		START: <u>MRS.</u>			
SITE	LOCATION	XMITR. PWR.	TYPE ANTENNA	ANT. GAIN (dB)	CABLE LOSSES (dB)	EQUIV. SYS. PWR. (ESP)			
TRANSMITTER	WHISIDE 19B	41 dBm	HEL Horn	14.4	5.7	XMITR. PWR. 41			
RECEIVER	ECOM HEX.		ANDREW CONICAL	0.3	1.2	+ANT. GAINS 14.7			
TOTAL ANT. GAIN (XMITR + REC.)		14.4 + 0.3 =		14.7 dB					
TOTAL CABLE LOSS (XMITR + REC.)		5.7 + 1.2 =		6.9 dB					
XMITR. SITE HEIGHT ABOVE SEA LEVEL		140 FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL		140 FT.			
XMITR. ANT. HT. ABOVE GND (FT)	RCVD. PWR. (dBm)		PATH LOSS (dB) = (ESP) - (RCVD. PWR.)		AVG. PATH. LOSS (dB)	NO. OF SAMP	REMARKS		
	TEST	TEST	TEST	TEST					
10	70313.09	98	100	147	149	4	ANT HORIZ 1206.		
15		97	97	146	146	4			
20		95	98	144	147	4			
25		102	103	151	152	4			
30		97	105	146	154	4			
35		97	97	146	146	4			
40		94	95	143	144	4			
45		90	90	139	139	4			
50		86	86	135	135	4			
55		83	82	132	131	4			
60		80	80	129	129	4			
65		78	79	127	128	4			
60		78	80	127	129	2			
55		83	82	132	131				
50		87	83	136	132				
45		90	90	139	139				
40		95	93	144	142				
35		97	98	146	147				
30		100	106	149	155				
25		103	100	152	149				
							MEAN READING OF STRIP CHART RECORDINGS		


[illegible]



# PROPAGATION PATH LOSS

DATE : 13 MARCH 72 TEST RUN SN: 720213.10  
PATH: WAYSIDE SITE No. 19B TO ECOM HEYAGON

OPER. FREQ. : 1545 MHZ

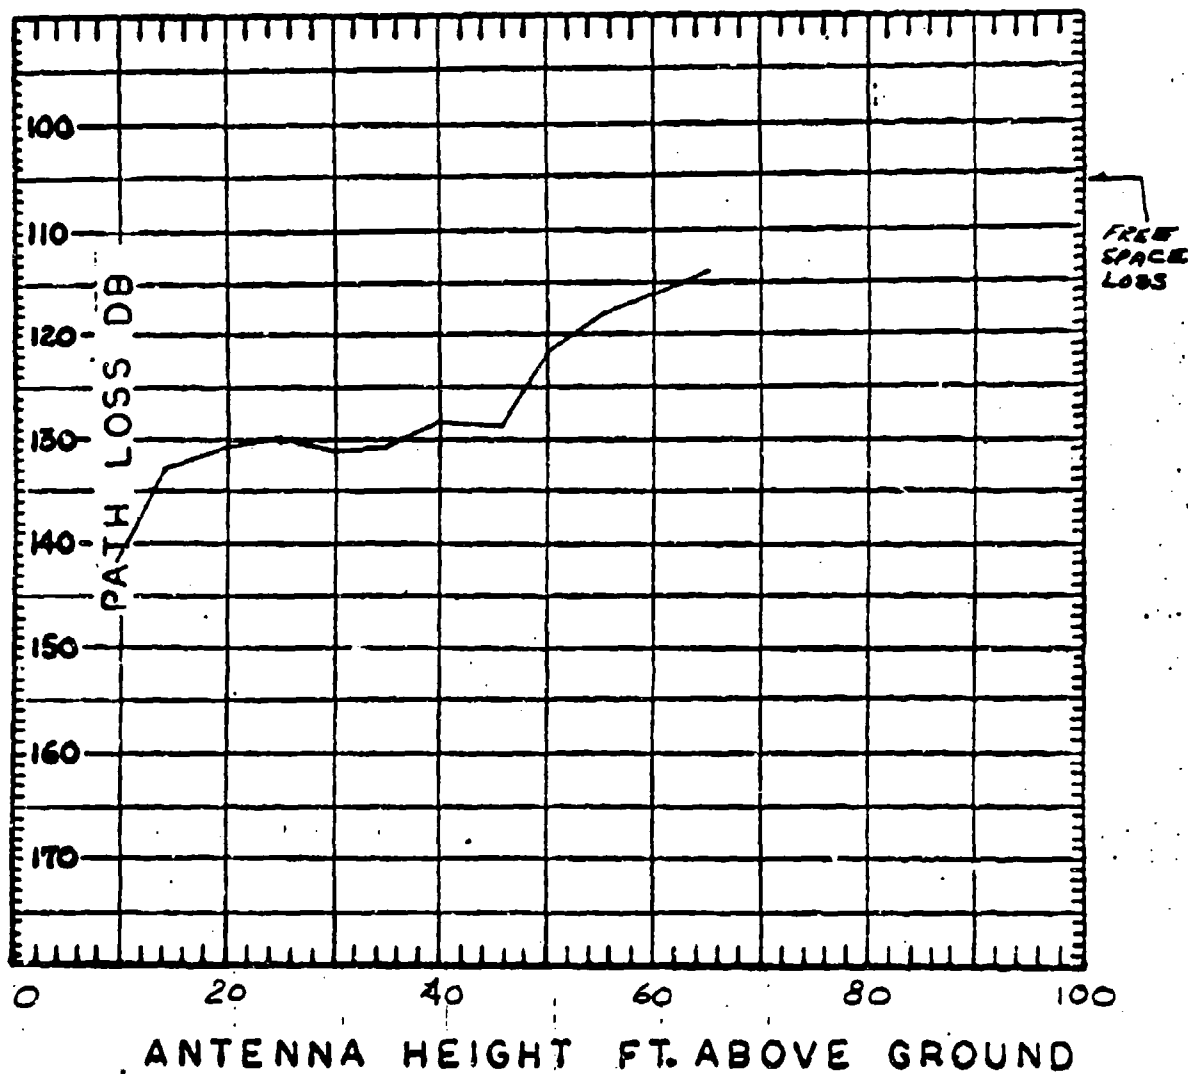




TEST DATA SHEET									
OPER. FREQ.		971.4 MHz		DATE: 14 MARCH 72		START: _____		HRS. _____	
SITE		LOCATION		REC. SITE ANT. HT. _____ FT.		ANT. GAIN (dB)		CABLE LOSSES (dB)	
TRANSMITTER		WAYSIDE 9		44dBm	AT-197	2.0	2.3	XMTR. PWR. 44	
RECEIVER		ECOM HEX.			AT-177	2.0	2.3	+ANT. GAINS 4	
TOTAL ANT. GAIN (XMTR + REC.)		2.0 + 2.0 =		4.0 dB				-CABLE LOSSES 4.6	
TOTAL CABLE LOSS (XMTR + REC.)		2.3 + 2.3 =		4.6 dB				-ESP = 43.4 USE 43	
XMTR. SITE HEIGHT ABOVE SEA LEVEL		140 FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL		145		FT.	
XMTR. ANT. HT. ABOVE GND (FT)	RCVD. PWR. (dBm)		PATH LOSS (dB) = (ESP) - (RCVD. PWR.)		AVG. PATH. LOSS (dB)	NO. OF SAMP.	REMARKS		
	TEST	TEST	TEST	TEST					
10	7202 14.01	7203 14.02	7203 14.01	7203 14.02	127	4			
15	88	93	131	136	124	4			
20	84	79	127	122	121	4			
25	82	79	125	122	122	4			
30	80	80	123	123	114	4			
32	70	72	113	115	113.5				
30	70	72	113	115					
25	79	78	122	121					
20	79	72	122	115					
15	78	82	121	125					
10	87	78	120	121					
							Pos. PEAK AVERAGING OF STRIP CHART RECORDINGS		

PROPAGATION PATH LOSS

DATE: 14 MARCH 72 TEST RUN SN: 720314.01402

PATH: WAYSIDE SITE 9 TO ECOM HEXAGON


OPER. FREQ.: 371.4 MHz

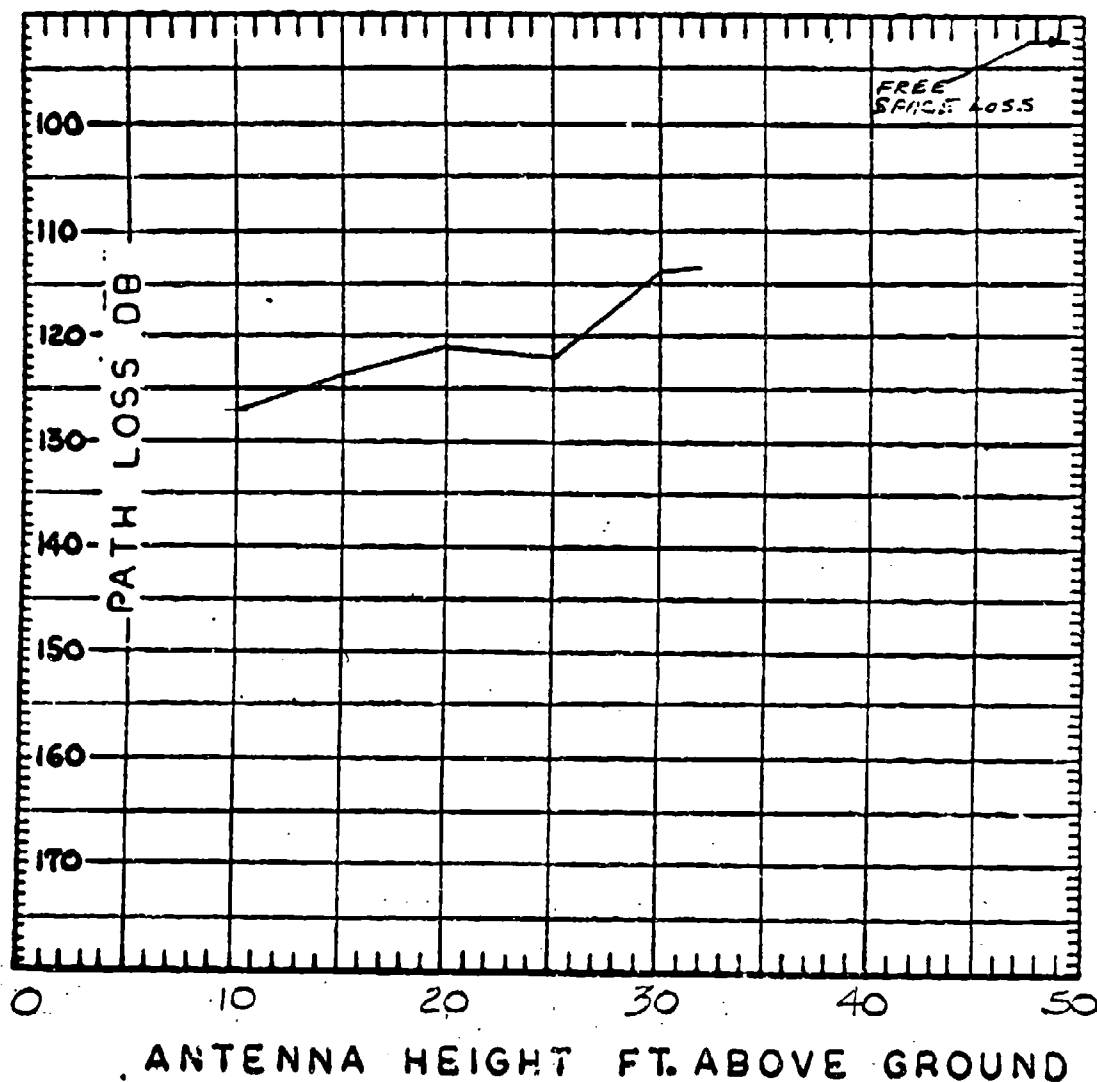

TEST DATA SHEET									
OPER. FREQ. 154.5 MHz		DATE: 14 MARCH 72		REC. SITE ANT. HT. FT.		START: HRS.			
SITE	LOCATION	XMTR. PWR.	TYPE ANTENNA	ANT. GAIN (dB)	CABLE LOSSES (dB)	EQUIV. SYS. PWR. (ESP)			
TRANSMITTER	WAYSIDE 9	40 dBm	ANDREW DISCRETE	2.5	5.7	XMTR. PWR. 40			
RECEIVER	ECOM HX.		ANDREW BICONICAL	0.3	1.2	+ANT. GAINS 28			
TOTAL ANT. GAIN (XMTR + REC.)		2.5 + 0.3 = 2.8		dB		-CABLE LOSSES 6.9			
TOTAL CABLE LOSS (XMTR + REC.)		5.7 + 1.2 = 6.9		dB		=ESP = 35.9 USE 36			
XMTR. SITE HEIGHT ABOVE SEA LEVEL 140 FT.		RCVR. ANT. HEIGHT ABOVE SEA LEVEL 140 FT.							
ANT. HT. ABOVE GND (FT)	RCVD. PWR. (dBm)		PATH LOSS (dB) = (ESP) - (RCVD. PWR.)		AVG. PATH. LOSS (dB)	NO. OF SAMP	REMARKS		
	TEST	TEST	720314.05	720314.06					
10	106	105	142	141	141	4			
15	102	101	138	137	138	4			
20	102	102	138	138	138	4			
25	100	100	136	136	136	4			
30	98	97	134	133	134	4			
32	97	95	133	131	132	2			
30	98	97	134	133					
25	100	99	136	135					
20	101	102	137	138					
15	101	103	137	139					
10	103	104	139	140					
POSITIVE PEAK AVERAGING OF STRIP CHART RECORDINGS									

PROPAGATION PATH LOSS  
DATE: 14 MARCH 72 TEST RUN SN: 720314.07503  
PATH: WAYSIDE SITE NO. 9 TO ECOM HEXAGON

OPER. FREQ.: 154.5 MHz

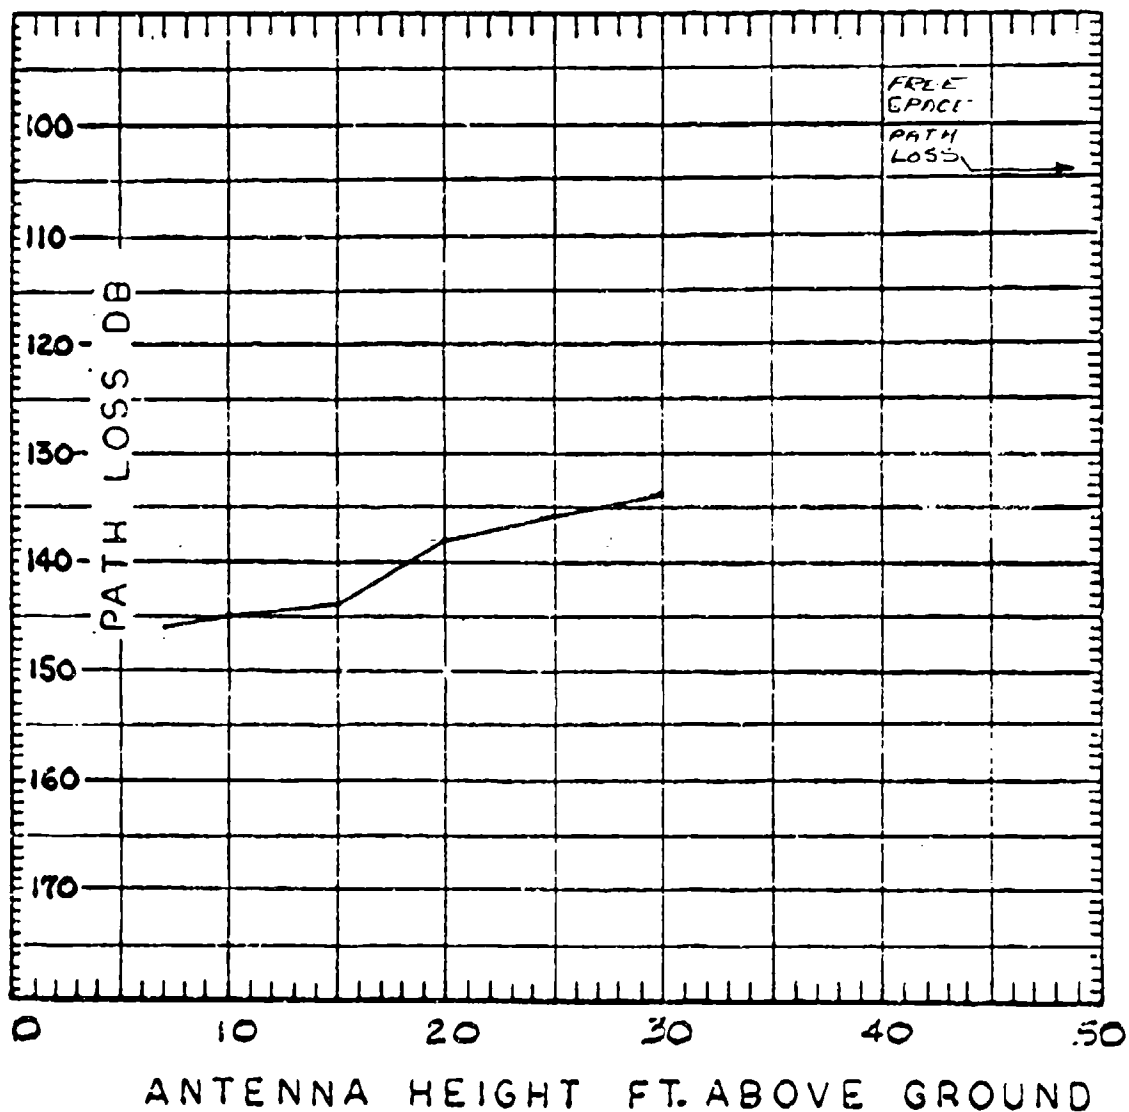


PROPAGATION PATH LOSS

DATE: 14 MARCH 72 TEST RUN SN: 720314.05406

PATH: WAYSIDE SITE 7 TO ECCM HEXAGON

OPER. FREQ.: 15.45 MHz

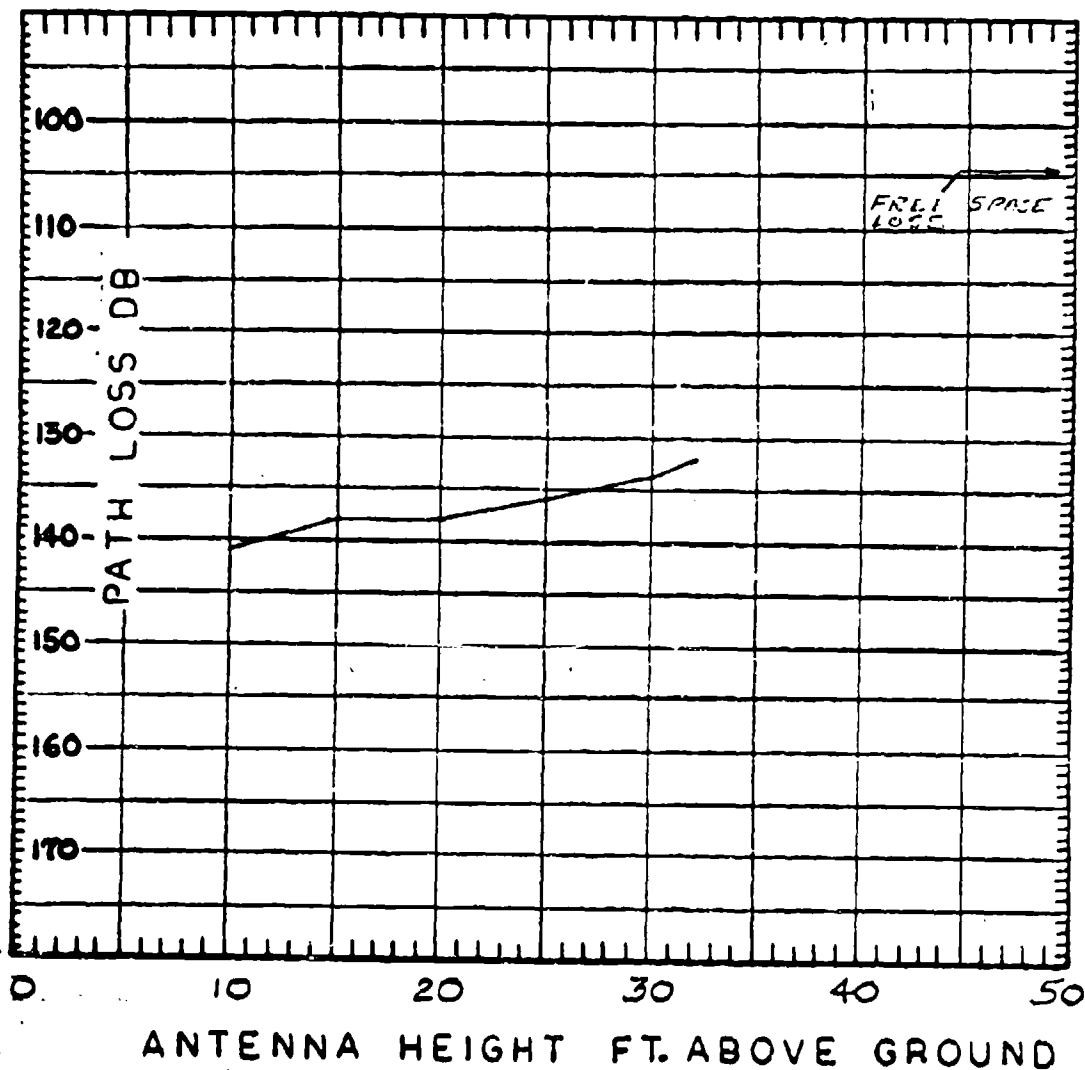

TEST DATA SHEET									
OPER. FREQ.		229.5 MHz		DATE: 14 MARCH 72		HRS.		START:	
SITE		LOCATION		REC. SITE ANT. HT.		FT.		HRS.	
TRANSMITTER		WAXSIDE 9	44 dBm	AT-197	1.2	1.8	1.8	EQUIV. SYS. PWR. (ESP)	44
RECEIVER		ECOM HEX.		AT-197	1.2	1.8	1.8	XMITR. PWR.	2.4
TOTAL ANT. GAIN (XMITR + REC.)		1.2 + 1.2 = 2.4		dB				+ANT. GAINS	3.6
TOTAL CABLE LOSS (XMITR + REC.)		1.8 + 1.8 = 3.6		dB				-CABLE LOSSES	4.3
XMITR. SITE HEIGHT ABOVE SEA LEVEL		145		FT.				-ESP = 42.8	USE 4.3
RCVR. ANT. HEIGHT ABOVE SEA LEVEL		145		FT.					
XMITR. ANT. HT. ABOVE GND (FT)		RCVD. PWR. (dBm)		PATH LOSS (dB) = (ESP) - (RCVD. PWR.)		AVG. PATH. LOSS (dB)		NO. OF SAMP.	
TEST	TEST	TEST	TEST	TEST	TEST	TEST	TEST	TEST	TEST
720314.03	720314.04	720314.03	720314.04	118	116	117	4		
10	75	73	72	115	115	115	4		
15	73	72	70	114	113	114	4		
20	72	70	69	112	112	112	4		
25	71	70	69	112	112	112	2		
30	70	70	70	114	113	113			
32	69	69	69	114	114	114			
36	69	69	69	115	114	114			
45	71	70	70	118	114	114			
50	71	73	73						
55	72	73	73						
60	73	73	73						
POSITIVE PEAK AVERAGING OF STRIP CHART RECORDINGS									




# PROPAGATION PATH LOSS

DATE: 14 MARCH 72 TEST RUN SN: 720314.0340.1

PATH: WAYSIDE SITE No. 9 TO ECOM HEXAGON

OPER. FREQ.: 229.5 MHz

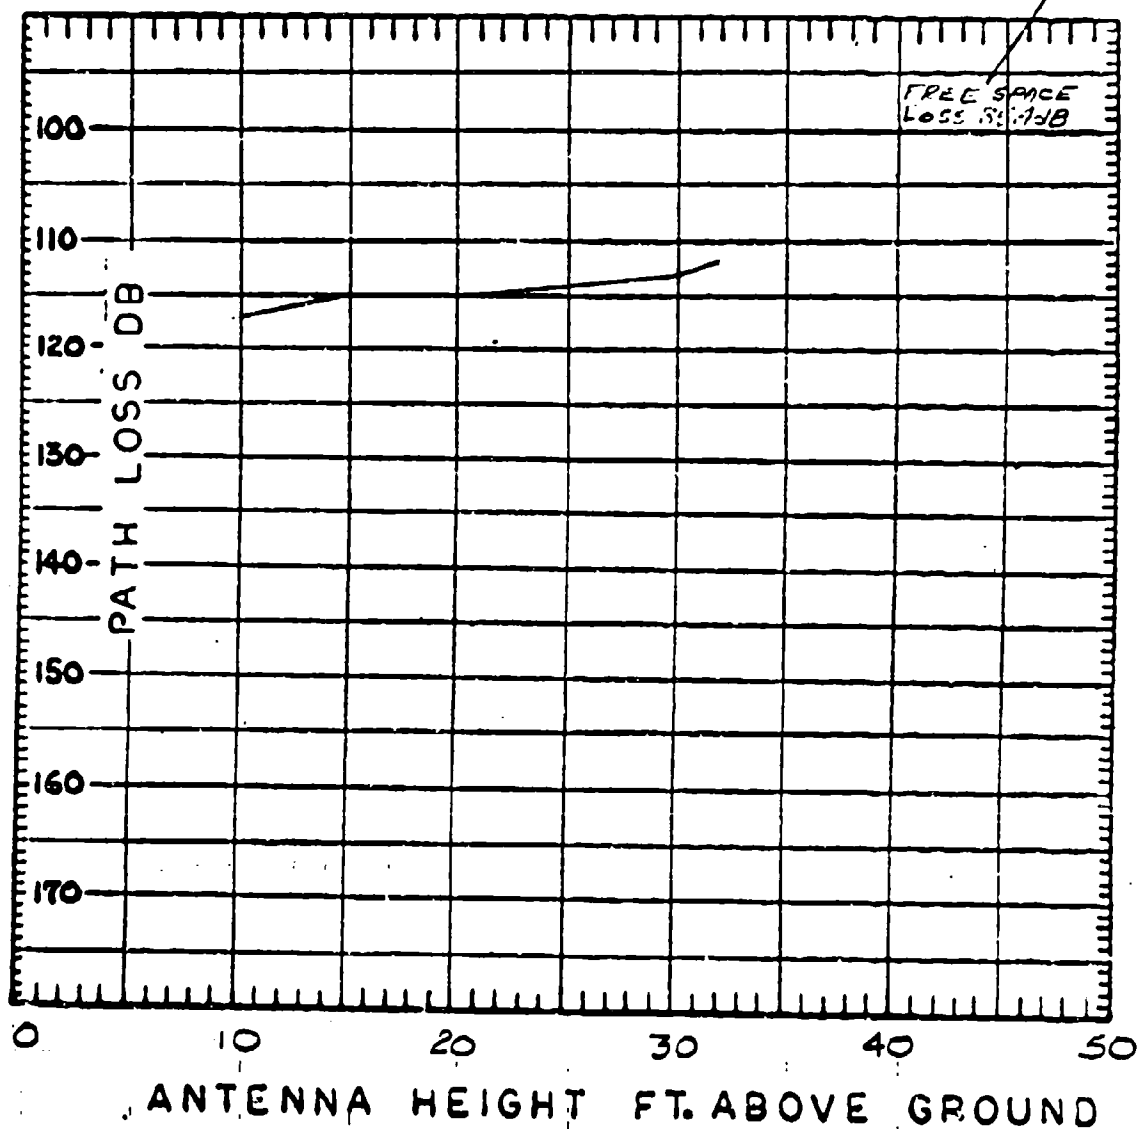

# DISTRIBUTION LIST

101	Defense Documentation Center ATTN: DDC-TCA Cameron Station (Bldg 5) 2 Alexandria, Virginia 22314	310	Recon Central/RSA AF Avionics Laboratory 001 Wright-Patterson AFB, Ohio 45433
107	Director National Security Agency ATTN: TDL 001 Fort George G. Meade, MD 20755	314	HQ, Air Force Systems Command ATTN: DLTE Andrews AFB 001 Washington, D. C. 20331
205	Director Naval Research Laboratory Code 2627 001 Washington, D.C. 20390	315	Director Air University Library ATTN: AUL/LSE-64-285 001 Maxwell AFB, Alabama 36112
206	Commander Naval Electronics Lab Cen ATTN: Library 001 San Diego, California 92152	319	Air Force Weapons Laboratory ATTN: WLIL 001 Kirtland AFB, New Mexico 87117
207	Commander US Naval Ordnance Lab ATTN: Tech Library 001 White Oak, Silver Spring, MD 20910	400	HQ DA(DAMI-ZA) 002 Washington, D.C. 20310
208	OIC, ENVPREDRSCHFAC Technical Library Naval Postgraduate School 001 Monterey, California 93940	403	HQ DA(DACE-ED) 001 Washington, D.C. 20314
215	Naval Communications Comd ATTN: N7 NAVCOMCOM 4401 Mass. Ave, N.W. 001 Washington, D.C. 20390	405	Ofc, Asst Sec of the Army (R&D) ATTN: Asst for Research Room 3-E-379, The Pentagon 001 Washington, D. C. 20310
301	Rome Air Development Cen ATTN: Docu Library (TDLD) 001 Griffiss AFB, New York 13440	408	HQ DA(DARD-ARP/Dr. R. Watson) 001 Washington, D.C. 20310
307	HQ ESD(TRI) L. G. Hanscom Field 001 Bedford, Massachusetts 01730	409	Commanding General US Army Materiel Command ATTN: AMCMA-EE 5001 Eisenhower Blvd 001 Alexandria, VA 22304
309	Air Force Avionics Lab ATTN: AFAL/DOT, STINFO 002 Wright-Patterson AFB, Ohio 45433	413	Commanding General US Army Materiel Command ATTN: AMCRD-FW 5001 Eisenhower Blvd 001 Alexandria, VA 22304
		415	CG, US Army Materiel Command ATTN: AMCRD-O 5001 Eisenhower Blvd 001 Alexandria, VA 22304
		419	Commanding General US Army Missile Command ATTN: AMSMI-RR(Dr. J. Hallows) 001 Redstone Arsenal, Alabama 35809

421	CG, US Army Missile Comd Redstone Scientific Info Cen ATTN: Chief, Document Sec	452	Commanding Officer Frankford Arsenal ATTN: SMUFA-W-1000(Mr. Kerensky)
002	Redstone Arsenal, Alabama 35809	001	Philadelphia, PA. 19137
423	Commanding General US Army Weapons Command ATTN: AMSWE-REF	462	Commanding Officer USA Materials & Mech Rsch Cen ATTN: AMXMR-ATL, Tech Libr Br
001	Rock Island, Illinois 61201	001	Watertown, Mass. 02172
427	Commanding General USACDC Intel & Control Sys Gp	464	Commanding Officer Aberdeen Proving Ground ATTN: Tech Libr, Bldg 313
002	Fort Belvoir, VA 22060	002	Aberdeen Pro, MD 21005
428	Commanding General US Army Combat Dev Command ATTN: CDCMS-E	465	Commanding Officer Aberdeen Proving Ground ATTN: STEAP-TL
001	Fort Belvoir, VA 22060	001	Aberdeen Proving Gnd, MD 21005
430	Commanding Officer USACDC CBR Agency ATTN: CSGCB-ST (H.P. Whitten)	471	Commanding Officer US Army Land Warfare Lab ATTN: CRDLWL-4A
001	Ft. McClellan, Ala. 36201	001	Aberdeen Proving Gnd, MD 21005
431	Commanding Officer USACDC Intelligence Agency	476	Commanding Officer USA Electronic Proving Ground ATTN: STEEP-MT
001	Ft. Huachuca, Ariz 85613	002	Fort Huachuca, Arizona 85613
432	Commanding Officer USACDC FAA	479	Commanding Officer USA Electronic Proving Ground ATTN: STEEP-MT-EA
001	Fort Sill, Oklahoma 73503	001	Fort Huachuca, Arizona 85613
433	HQ, USA Aviation Sys Comd ATTN: AMSAV-C-AD P.O. Box 209	480	Commanding Officer USASA Test and Evaluation Cen
001	St. Louis, Missouri 63166	001	Fort Huachuca, Arizona 85613
442	Commanding Officer Harry Diamond Laboratories ATTN: Library	482	Commanding General USA Strategic Comm Command ATTN: SCC-FD-M
001	Washington, D.C. 20438	001	Fort Huachuca, Arizona 85613
443	CO, USA Foreign Sci & Tech Cen ATTN: AMXST-ISL 220 Seventh St., N.E.	483	USA Research Office-Durham ATTN: CRDARD-IP Box CM, Duke Station
002	Charlottesville, VA 22901	001	Durham, N. C. 27706
444	CO, USA Foreign Sci Div ATTN: AMXST CE Division 220 Seventh St., N.E.	488	USA Security Agency ATTN: IARD Arlington Hall Sta, Bldg 420
001	Charlottesville, VA 22901	001	Arlington, VA 22212
446	Commanding Officer Picatinny Arsenal ATTN: SMUPA-TVI		
001	Dover, N. J. 07801		

492	Commandant US Army Air Defense School ATTN: C&S Dept, Msl Sci Div 001 Fort Bliss, Texas 79916	598	Commanding Officer USA Satellite Comm Agency ATTN: AMCPM-SC-3 001 Fort Monmouth, N.J. 07703
493	Director USA Engr Waterways Exper Sta ATTN: Research Center Library 002 Vicksburg, Mississippi 39180		
497	Commanding Officer USA Aviation Materiel Labs ATTN: Technical Director 001 Fort Eustis, VA 23604	605	US Army Liaison Office MIT-Lincoln Lab, Room A-210 P.O. Box 73 001 Lexington, Mass. 02173
500	Commanding Officer Yuma Proving Ground ATTN: STEYP-AD(Tech Library) 001 Yuma, Arizona 85364	610	Director Night Vision Lab (USAECOM) ATTN: AMSEL-NV-OR(Mr. S. Segal) 001 Fort Belvoir, VA 22060
503	Director USA Advanced Matl Concepts Agcy ATTN: AMXAM 001 Washington, D. C. 20315	613	Atmospheric Sci Lab, USAECOM ATTN: AMSEL-BL-LA White Sands Missile Range 001 New Mexico 88002
504	Commanding General US Army Materiel Command ATTN: AMCRD-R 5001 Eisenhower Blvd 001 Alexandria, VA 22304	614	Chief Missile Elct Warfare Tech Area EW Lab, USA Electronics Command 001 White Sands Msl Range, N.M. 88002
508	Commanding Officer USACDC Infantry Agency ATTN: Central Files 001 Fort Benning, Georgia 31905	616	CG, USA Electronics Command ATTN: AMSEL-PP/P-IED (C. Mogavero) 225 South 18th Street 001 Philadelphia, PA 19103
512	Commanding Officer USACDC Armor Agency 001 Fort Knox, Kentucky 40121	680	Commanding General US Army Electronics Command 000 Fort Monmouth, N. J. 07703
513	Commanding Officer USACDC Aviation Agency ATTN: CAGAV-DL2 001 Fort Rucker, Ala. 36360		1 AMSEL-EN 1 AMSEL-NV-D 1 AMSEL-WL-D 1 AMSEL-NL-D 1 AMSEL-TL-D 3 AMSEL-CT-D 1 AMSEL-BL-D
516	Commandant USA Field Artillery School ATTN: Target Acq Dept 002 Fort Sill, Oklahoma 73503		1 AMSEL-VL-G (Ofc of Record) 1 AMSEL-SI-AV 1 AMSEL-CD-SAA-E 1 AMSEL-MA-MP 2 AMSEL-MS-TI 1 AMSEL-GG-TD 2 AMSEL-PA
517	Commanding General US Army Missile Command ATTN: AMSMI-RFG (N. Bell) 001 Redstone Arsenal, Ala 35809		

1 USMC-LNO

1 AMSEL-RD

1 USACDC-LNO

25 AMSEL-VL-G

{  
FCM  
1-2-60  
1-2-60  
only

701 Sylvania Elct Sys-Western Div  
ATTN: Tech Rept Library  
P.O. Box 205

001 Mountain View, Calif 94040

703 NASA Scientific & Tech Info Fac  
ATTN: Acq Branch (S-AK/DL)  
P.O. Box 33

002 College Park, MD 20740

707 Target Signature Analysis Cen  
Willow Run Labs-Inst of Sci Tech  
Univ of Michigan, PO Box 618

001 Ann Arbor, Michigan 48107

708 Ballistic Msl Radn Anal Cen  
Univ of Mich, Willow Run Lab  
Institute of Sci & Tech

001 PO Box 618, Ann Arbor, Mich.  
48107

709 Strategic Technology Ofc IAS  
Battelle Memorial Institute  
505 King Avenue

001 Columbus, Ohio 43201

718 Remote Area Conflict Info Cen  
Battelle Memorial Institute  
505 King Avenue

001 Columbus, Ohio 43201

721 Vela Seismic Info Center  
University of Michigan  
Box 618

003 Ann Arbor, Mich. 48107

UNCLASSIFIED

Security Classification

## DOCUMENT CONTROL DATA - R &amp; D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author) US Army Electronics Command Fort Monmouth, New Jersey 07703		2a. REPORT SECURITY CLASSIFICATION UNCLASSIFIED	
		2b. GROUP	
3. REPORT TITLE UHF Propagation Path Loss Measurements at Low Grazing Angles			
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) Technical Report			
5. AUTHOR(S) (First name, middle initial, last name) Henry Schlusser			
6. REPORT DATE April 1973		7a. TOTAL NO. OF PAGES 189	7b. NO. OF REFS 0
8a. CONTRACT OR GRANT NO. AMC Code No. 591 700.A1.072.26.01.R9107-2 <del>XXXXXXXX</del>		8b. ORIGINATOR'S REPORT NUMBER(S) ECOM-4106	
c.		9a. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	
d.			
10. DISTRIBUTION STATEMENT Distribution limited to US Government agencies only; Test and Evaluation; 30 April 1973. Other requests for this document must be referred to Commander, US Army Electronics Command, ATTN: AMSEL-VL-G, Fort Monmouth, NJ 07703			
11. SUPPLEMENTARY NOTES		12. SPONSORING MILITARY ACTIVITY US Army Electronics Command ATTN: AMSEL-VL-G Fort Monmouth, New Jersey 07703	
13. ABSTRACT This report covers RF path loss measurements near Fort Monmouth, N. J., over distances of up to 10 miles and at low grazing angles. Four frequencies were used during these tests, three in the UHF region and one just below it. Measurements were made with antennas vertically, horizontally, and circularly polarized. Paths were varied from non-line-of-sight to definitely line-of-sight. Comparison of losses under varying conditions were made and graphs for estimating losses in the area covered by these tests are included.			

DD FORM 1473

REPLACES DD FORM 1473, 1 JAN 64, WHICH IS OBSOLETE FOR ARMY USE.

(5)

UNCLASSIFIED

Security Classification

UNCLASSIFIED

Security Classification

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
UHF Propagation losses RF transmissions at low grazing angles						

HISA FM 888-73

(6)

UNCLASSIFIED

Security Classification